

Ref: 2166

File: 195-30/CRUI

June 15, 2016

BY EMAIL

To: Regional Executive Directors, Ministry of Forests, Lands & Natural Resource Operations

Re: Amendment No. 4 to the 2014 Cruising Manual

The purpose of the memo is to inform you that Amendment No.4 to the 2014 *Cruising Manual* becomes effective June 15, 2016.

The manual will be available on the internet at the following link:

<http://www2.gov.bc.ca/gov/content/industry/forestry/competitive-forest-industry/timber-pricing/timber-cruising/timber-cruising-manual>

Please find a copy of the Amendment No. 4 highlights attached.

Comments or questions about this manual should be referred to Beth Eagles, Cruising Policy Forester, Timber Pricing Branch at (250) 387-8307.



Steve Kozuki
Director
Timber Pricing Branch

Attachment

pc: Keith Tudor, Manager, Timber Measurements
Dave Spinks, Regional Cruising Specialist, Cariboo, Thompson/Okanagan & Kootenay/Boundary Regions
Greg Jonuk, Cruising Specialist, Northeast, Omineca & Skeena Regions
Alan Rudson, Coast Area Pricing Section Head, West Coast & South Coast Regions

June 2016 *Cruising Manual* Changes (Amendment No. 4)

The *Cruising Manual* is available on the Internet at:

<http://www2.gov.bc.ca/gov/content/industry/forestry/competitive-forest-industry/timber-pricing/timber-cruising/timber-cruising-manual>

Section	Description
2.3 – Sampling Error Objectives	Addition of a table that serves as a guide to the various cruising standards.
2.3.2 – General Cruise Based Cutting Authorities – Interior Only	Clarification that these standards only apply to the Interior.
2.3.4 – General Cruise Based Cutting Authorities – Coast Only	Introduction of new cruising standards for cruise based cutting authorities on the Coast.
2.3.5 – Cutting Authorities within the Northern Great Bear Rainforest	Introduction of new cruising standards for cruise based cutting authorities in the Northern Great Bear Rainforest.
2.3.6 – Rights of Way Cruises	New section for road right of way cruising standards. Introduction of new road right of way cruising standards for BCTS and Coastal Cruise Based cutting authorities.

Table of Contents

1 Introduction

1.1 Definitions	1-3
1.2 Terms of Reference	1-10
1.2.1 Calculation Conventions	1-10

2 Cruise Design

2.1 Cruise Objective	2-2
2.2 Cruise Plans	2-3
2.3 Sampling Error Objectives	2-5
2.3.1 Scale Based Cutting Authorities	2-6
2.3.2 General Cruise Based Cutting Authorities	2-7
2.3.3 Mountain Pine Beetle Cruise Based Cutting Authorities	2-7
2.3.4 General Cruise Based Cutting Authorities – Coast Only	2-8
2.3.5 Cutting Authorities within the Northern Great Bear Rainforest	2-9
2.3.6 Rights of Way Cruises	2-10
2.4 Sampling Patterns – General Conditions	2-11
2.4.1 Standards for the Location of Plots Using a Grid	2-11
2.4.2 Standards for the Location of Additional Plots to Meet Section 2.2 Requirements	2-13
2.4.2.1 Office Cruise Plan Procedure	2-13
2.4.2.2 Field Procedure	2-13
2.4.3 Standards for the Location of Additional Plots to Meet Sampling Error	2-13
2.5 Other Timber Cruising Conditions	2-15
2.5.1 Standards for Re-cruising	2-15
2.5.2 Unsafe to Cruise	2-15
2.5.3 Cruising Patch Cut Silviculture Systems	2-15
2.5.4 Schedule "A" (Timber Licence) and "B" (Crown) Lands	2-17
2.6 Types of Cruises	2-18
2.6.1 One Hundred Percent Cruise	2-18
2.6.2 Fixed Area Plot Sampling (See Section 4.3.1.13)	2-18
2.6.3 Variable-Plot Sampling (Prism or Relascope)(See Section 4.3.1.15)	2-18
2.7 Double Sampling (See Section 4.3.1.10)	2-19
2.7.1 Measure Plots	2-19
2.7.2 Count Plots	2-19
2.8 Forest Typing	2-21
2.9 Comparative Cruises	2-22
2.9.1 Cruise Based Salvage Cutting Authorities	2-22

3 Quality Assurance

3.1 Introduction	3-2
3.2 Cruise Plan Standards.....	3-3
3.2.1 Cruise Plan Map Standards	3-3
3.3 Principles	3-6
3.4 Tree Data	3-7
3.5 Survey and Area Measurement Standards.....	3-12
3.6 Plot Slopes (Section 4.3.1.23)	3-16
3.7 Check Cruise Dispute Mechanism	3-17
3.8 Cruise Data Submission Standards.....	3-18

4 Field Procedures

4.1 Introduction	4-2
4.2 Entry of data in divided spaces or numbered columns.....	4-6
4.3 Front Side of Cruise Tally Sheet (FS 205)	4-7
4.3.1 Card Type 9	4-7
4.3.1.1 Positions 2 to 7 Licence Number (Optional)	4-7
4.3.1.2 Positions 8 to 10 Cutting Permit (Optional)	4-7
4.3.1.3 Positions 11 to 13 Block (within the Cutting Permit).....	4-7
4.3.1.4 Positions 14 to 15 Strip Number (Number of Strip on which Plot is Located, if strips are used).	4-7
4.3.1.5 Positions 16 to 17 Plot Number or Letter	4-7
4.3.1.6 Position 18 O/C	4-9
4.3.1.7 Positions 19 to 20 Type Number (Section 2.8)	4-9
4.3.1.8 Positions 21 to 22 Age in 10's (Optional in Interior).....	4-9
4.3.1.9 Positions 23 to 24 Height in Metres	4-11
4.3.1.10 Position 25 Plot Type (See Section 2.7).....	4-12
4.3.1.11 Position 26.....	4-12
4.3.1.12 Positions 27 to 39 Main Plot Size (not required for 100% Cruise)	4-12
4.3.1.13 Positions 27 to 30 Hectares (Fixed Plot) (See Section 2.6.2).....	4-12
4.3.1.14 Positions 31 to 35 Basal Area Factor (BAF Variable Plots) m ² /ha (See Section 2.6.3)	4-14
4.3.1.15 Position 36 Prism Sweep	4-14
4.3.1.16 Positions 37 to 39 DBH Limit.....	4-22
4.3.1.17 Positions 40 to 52 Sub-Plot Sizes.....	4-22
4.3.1.18 Positions 40 to 43 Hectares (Fixed Plot)	4-23
4.3.1.19 Positions 44 to 48 Basal Area Factor (BAF) Variable Plots	4-23
4.3.1.20 Position 49 Prism Sweep	4-23
4.3.1.21 Positions 50 to 52	4-23
4.3.1.22 Positions 53 to 54 Harvesting Method (Optional).....	4-23
4.3.1.23 Positions 55 to 57 Slope Percent	4-24
4.3.1.24 Positions 58 to 61 Year/Month.....	4-24

4.3.2 Card Type 2	4-24
4.3.2.1 Position 1 Tree Details	4-24
4.3.2.2 Positions 25 to 26 Tree Number	4-24
4.3.2.3 Positions 27 to 29 Total Height	4-24
4.3.2.3.1 Trees with Broken Tops	4-25
4.3.2.3.2 Leaning Trees	4-27
4.3.2.3.3 Deciduous Tree Heights	4-28
4.3.2.4 Positions 30 to 31 Species	4-28
4.3.2.4.1 Commercial Tree Species Names and Symbols	4-28
4.3.2.5 Positions 32 to 35 DBH	4-30
4.3.2.5.1 High Side	4-30
4.3.2.5.2 Horizontal Distance from Plot Centre	4-30
4.3.2.5.3 Diameter of trees forked at or near DBH	4-30
4.3.2.6 Position 36 Tree Class	4-34
4.3.2.7 Positions 37 to 44 Pathological Remarks	4-40
4.3.2.8 Positions 45 to 51 Quality Remarks (Mandatory on Coast, Optional in Interior)	4-41
4.3.2.9 Position 45 Spiral Grain	4-41
4.3.2.10 Position 46 Sweep	4-43
4.3.2.11 Position 47 Lean	4-43
4.3.2.12 Position 48 Live Limb (Grade Change)	4-43
4.3.2.13 Position 49 Log No. of 1st Stub	4-44
4.3.2.14 Positions 50 and 51 Knots, 1st 5 m and 2nd 5 m	4-44
4.3.2.15 Positions 52 to 56	4-45
4.3.2.16 Position 59 Selective Cutting	4-45
4.3.2.17 Position 60 Miscellaneous	4-46
4.3.2.18 Positions 61 to 63 Damage Codes	4-46
4.4 Reverse Side of Cruise Tally Sheet (FS 205 HVA)	4-47

5 Ministry of FLNR Map Area Statement (FS 121)

5.1 Cruise Identity (Card Type A)	5-4
5.1.1 Positions 2 to 7 Licence Number (required)	5-4
5.1.2 Positions 8 to 10 Cutting Permit (required)	5-4
5.1.3 Positions 11 to 13 Number of Blocks (required)	5-4
5.1.4 Positions 14 to 16 Forest Regions and Districts (required)	5-4
5.1.5 Position 17 Forest Inventory Zones (required)	5-4
5.1.6 Positions 18 to 21 Unit and PSYU number (required)	5-5
5.1.7 Positions 22 to 26 Elevation (required)	5-5
5.1.8 Position 27 Tenure (required)	5-6
5.1.9 Position 28 Quota Type (optional)	5-7
5.1.10 Position 29 Sale Type (optional)	5-8
5.1.11 Positions 30 to 37 Total Merchantable Area (Hectares) (required)	5-8
5.1.12 Position 38 MFLNRO Appraisal Information (required)	5-8
5.1.13 Positions 39 to 53 UTM Co-ordinates (optional)	5-9
5.1.14 Positions 54 to 66 Locality Description (optional)	5-9

5.1.15 Positions 67 to 80 Cruised By (required)	5-9
5.2 Compilation Standard (Card Type B).....	5-10
5.2.1 Position 11 Damage Reporting (required)	5-10
5.2.2 Position 12 Selective/ Leave Tree Indicator (required)	5-10
5.2.3 Position 13 Double Sampling Indicator (required)	5-10
5.2.4 Position 14 Special Compilation (required for interior cruises)	5-10
5.2.5 Positions 15 to 16 Tree Class and Species Compilations (optional)	5-11
5.2.6 Positions 17 to 18 Type of Compilation (required)	5-11
5.2.7 Positions 19 to 27 Timber Merchantability Specifications (required for Interior compilations).....	5-12
5.2.8 Positions 28 to 29 Log Lengths (to the nearest metre) (required)	5-12
5.2.9 Positions 30 to 74 Exceptions (optional).....	5-12
5.2.10 Position 75 Block or Average Line Method of Compilation (required).....	5-13
5.2.11 Position 76 (required for CGNF cruises)	5-13
5.2.12 Position 77 100% (required for 100% cruises)	5-13
5.2.13 Positions 78 to 80 Stump Cruise Information (required for stump cruises)	5-13
5.3 Type Description (Card Type C)	5-14
5.3.1 Positions 14 to 15 Type Number (required).....	5-14
5.3.2 Positions 16 to 28 Map Label and Type Identity (optional).....	5-14
5.3.3 Positions 29 to 88 Timber Type Area (required)	5-14
5.4 Block Description (Card Type D).....	5-15
5.4.1 Positions 11 to 13 Block Number (required).....	5-15
5.4.2 Positions 14 to 15 Type Number (required).....	5-15
5.4.3 Position 16 Coast Block Maturity Indicator (required).....	5-15
5.4.4 Positions 17 to 76 Hectares/ Treatment Units (required).....	5-15
5.5 Height/Diameter Description (Card Type E).....	5-16
5.6 Harvesting Description (Card Type F)	5-17
5.6.1 Positions 12 to 13 Harvesting Method (required)	5-17
5.6.2 Positions 14 to 15 Type No. (required)	5-17
5.6.3 Positions 17 to 76 Treatment Units Area (required)	5-17
5.7 Treatment Unit Description (Card Type G) (optional)	5-18
5.8 Non-productive Area Descriptions (Card Type H) (optional)	5-19
5.9 FS 221 – Percent Reduction.....	5-20
5.10 Compilation Output.....	5-23
5.10.1 Summary of Required/Optional Reports and digital files.....	5-23
5.10.2 Valid Compilation Programs	5-24

6 Stump Cruising

6.1 Introduction	6-2
6.1.1 General Procedures	6-2
6.1.2 Stump Cruising - Volume Calculations	6-4
6.1.3 Sampling Errors	6-5
6.2 Boundaries	6-6
6.3 Measurement Methods	6-7
6.3.1 Method 1: Areas Less than 10.0 ha	6-7
6.3.2 Method 2: Areas Greater than or Equal to 10.0 ha	6-7
6.4 Timber Available For Measuring	6-8
6.4.1 Tally Card - FS 205S	6-8
6.4.2 Field Measurements	6-8
6.5 All Stumps Removed From the UTH Area (i.e., Land Cleared, Road is Built).....	6-9
6.5.1 Option 1	6-9
6.5.2 Option 2	6-9
6.5.3 Option 3	6-9
6.6 Portions of Trees Removed (i.e., Shake Blocks or Special Forest Products Removed From a Segment of Tree(s))	6-10
6.7 Stump Cruise Tally Sheet (FS 205S).....	6-13
6.7.1 Card Type 9	6-13
6.7.2 Card Type 3	6-13
6.7.2.1 Positions 2 to 24	6-13
6.7.2.2 Positions 25 and 26 Tree Number	6-13
6.7.2.3 Positions 27 to 29 Total Height.....	6-13
6.7.2.4 Positions 30 and 31 Species	6-17
6.7.2.5 Positions 32 to 35 DBH.....	6-17
6.7.2.6 Position 36 C/C Crown Class	6-17
6.7.2.7 Positions 37 to 39 Total Age (see Section 4.3.2.6).....	6-17
6.7.2.8 Position 40 Partial Cutting.....	6-18
6.8 Map Area Statement (FS 121)	6-21
6.8.1 Card Type B	6-21
6.8.1.1 Position 78 Stump Diameter Measurement Type	6-21
6.8.1.2 Position 79 Diameter Measurements.....	6-21
6.8.1.3 Position 80.....	6-21
6.8.2 Card Type E.....	6-21
6.8.2.1 Position 1	6-21
6.8.2.2 Positions 2 to 10	6-22
6.8.2.3 Positions 11 to 13	6-23
6.8.2.4 Position 14 Calculated Height Only	6-23
6.8.2.5 Positions 15 to 16 Species Used.....	6-24
6.8.2.6 Positions 17 to 22 For These Species.....	6-24
6.8.2.7 Positions 23 to 24 Type Used.....	6-24
6.8.2.8 Positions 25 to 80 For These Types	6-24

Appendices

Additional Sampling Information	A-2
Fixed Area Sample Size.....	A-2
Variable-Plot Sampling (Prism or Relascope).....	A-4
Variable Plot Sample Size	A-5
Coefficient of Variation (CV).....	A-6
Age and Height Class Limits	A-8
Circular Error Probability (CEP) Method.....	A-9
Combined GPS and Conventional Traverse Procedure	A-12
Cruise Compilation Loss Factor Table (Table 17)	A-14
A.17.1 Tree Farm Licences.....	A-15
A.17.2 Other Tenures.....	A-18
A.17.3 Tabular Listing of Table Numbers.....	A-19
A.17.4 Tree Class Modification of Loss Factor Tables	A-28
A.17.5 Forest Inventory Zone Series Number	A-30
Damaged Stands (Appendix 6).....	A-31
A.6.1 Pest Damage.....	A-31
A.6.1.1 Bark Beetle Descriptions	A-31
A.6.1.2 Attack Codes for Balsam (<i>Abies</i> sp.), White Pine, Yellow Pine and Lodgepole Pine	A-32
A.6.1.3 Blister Rust Code 4 (Risk Group 2, White Pine).....	A-33
A.6.1.4 Attack Codes for Spruce, Douglas Fir	A-34
A.6.1.5 Defoliators (Path/Tree Class = Risk Group, All Species).....	A-35
A.6.2 Fire Damage.....	A-35
A.6.2.1 Light Damage - Code A	A-35
A.6.2.2 Moderate Damage - Code B.....	A-35
A.6.2.3 Heavy Damage - Code C	A-35
A.6.3 Down Trees	A-36
Dead Potential 50% Threshold Calculations	A-39
Sound Wood Factors for Saprot (Table 19).....	A-39
Ten Meter Log Table	A-40
Distribution of "t"	A-41
FS 693 Provincial Cruise Plan	A-42
FS 694 Provincial Cruise Plan and Map Check List.....	A-44
FS 695 Provincial Office Check of Field Cruise Data.....	A-45
FS 696 Provincial Field Check Cruise Summary	A-46
FS 697 Provincial Compilation Check Form.....	A-47
Horizontal Distance Correction	A-48
Slope Correction Formula.....	A-48
Correction Table for Chaining.....	A-49
Correction Table for Plot Radii.....	A-50
Interior Lumber Recovery Factor (LRF) Algorithms (Appendix 7).....	A-52
A.7.1 Dead Potential White Pine Log Grade Algorithm	A-52
A.7.1.1 Assumption	A-52
A.7.1.2 Procedures.....	A-52

A.7.1.3 Flowchart	A-53
A.7.2 Interior Hemlock Algorithm Flowchart	A-54
A.7.3 Interior Balsam (<i>Abies</i> sp.) Process	A-54
Magnetic Declination – March 2014	A-55
Pathological Classification of Trees (Appendix 4).....	A-59
A.4.1 Class of Trees.....	A-59
A.4.1.1 Residual Trees.....	A-59
A.4.1.2. Suspect Trees	A-59
A.4.2 Signs and Defects Indicative of Decay in Standing Trees	A-61
A.4.2.1 Conks	A-61
A.4.2.2 Blind Conks.....	A-63
A.4.2.3 Scars	A-68
A.4.2.4 Fork or Pronounced Crook.....	A-74
A.4.2.5 Frost Cracks	A-78
A.4.2.6 Mistletoe Trunk Infections.....	A-79
A.4.2.7 Large Rotten Branches.....	A-80
A.4.2.8 Dead or Broken Top.....	A-81
A.4.3 Abnormalities which are not Recorded.....	A-82
A.4.3.1 External Evidence of Butt Rot not Associated with Suspect Abnormalities	A-82
A.4.3.2 Flutes	A-82
A.4.3.3 Candelabra Branches.....	A-83
A.4.3.4 Branch Fans.....	A-83
A.4.3.5 Black Knots.....	A-84
A.4.3.6 Burls and Galls.....	A-84
A.4.3.7 Sweep	A-85
A.4.3.8 Exposed Roots.....	A-85
A.4.3.9 Other.....	A-86
A.4.4 Some Common Decays of Forest Tree Species in British Columbia	A-88
Region and District Codes	A-129
Risk Group Ratings by Pathological Indicators (Table 18)	A-131
Site Index Tables for British Columbia – All Species (Appendix 9)	A-137
A.9.1 Use of Site Index Tables for BC to Determine the Age Corrections at Breast Height	A-137
A.9.2 Coast.....	A-138
A.9.3 Interior.....	A-142
A.9.4 Provincial – Coast and Interior	A-144
Stump and Breast Height Diameter Tables for the British Columbia	
Merchantable Tree Species (Tables 4 to 8).....	A-160
Constants for Species and Zones (Table 4).....	A-161
Butt Taper - Mature - FIZ A, B and C – Coast (Table 5)	A-162
Butt Taper - All Ages - FIZ D to J – Interior (Table 6).....	A-164
Butt Taper - All Ages - FIZ K and L – Interior (Table 7)	A-166
Butt Taper - Immature - FIZ A, B and C – Coast (Table 8)	A-168

BACK

Timber Type Label Information A-169
True North, Magnetic North and Grid North..... A-172

Index

Figures

Figure 2.1 Example of Local Grid Design.	2-12
Figure 2.2 Example of Patch Cut block.	2-17
Figure 2.3 Sample Cruise Tally Sheet (FS 205) – Card Type 9.	2-20
Figure 4.1 Cruise Tally Sheet – FS 205C (front side).....	4-3
Figure 4.2 Cruise Tally Sheet – FS 205C (back side).....	4-4
Figure 4.3 Cruise Strip Line Traverse Notes (front).	4-5
Figure 4.4 "In", "Out" and "Borderline" Trees.....	4-15
Figure 4.5 Borderline Tree Measurements - Variable Plot	4-16
Figure 4.6 Walkthrough Method - Regular Boundary	4-18
Figure 4.7 Walkthrough Method - Irregular Boundary	4-19
Figure 4.8 Walkthrough Method - Unflagged and Harvested Rights of Way.....	4-21
Figure 4.9 Example of Where to Measure the Height on Trees with a Broken Top or Fork/Crook.	4-26
Figure 4.10 Measuring Height of Leaning Trees	4-27
Figure 4.11 Two Trees or One.....	4-31
Figure 4.12 Breast height in Relation to High Side	4-33
Figure 4.13 Determination of Percent Twist	4-42
Figure 4.14 Example of Live Limb.	4-44
Figure 5.1 Front Side of Map Area Statement Form (FS 121).....	5-2
Figure 5.2 Reverse Side of Map Area Statement Form (FS 121).....	5-3
Figure 5.3 Percent Reduction Worksheet.....	5-22
Figure 6.1 Examples of Recommended Stump Measurements	6-11
Figure 6.2 Examples of Risk Group Determinations for Stumps.....	6-12
Figure 6.3 Crown Classes	6-16
Figure 6.4 FS 205S Ministry of Forests, Lands and Natural Resource Operations Stump Cruise Tally Sheet	6-19
Figure 6.56 FS 205S Ministry of Forests, Lands and Natural Resource Operations Stump Cruise Tally Sheet (side 2 of 2)	6-20
Figure 6.6 Height/ DBH Description Card.....	6-22
Figure 6.7 Height/ DBH Description Card.....	6-23
Figure A.1 Illustration of Basal Area/Hectare.	A-5
Figure A.2 Circular Error Probability.....	A-9
Figure A.3 Example of Circular Error Probability Theory in Check Cruising	A-11
Figure A.4 Example of Mechanical Damage.....	A-38
Figure A.5 FS 693 - Provincial Cruise Plan (Page 1 of 2).....	A-42
Figure A.6 FS 693 - Provincial Cruise Plan (Page 2 of 2).....	A-43
Figure A.7 FS 694 - Provincial Cruise Plan and Map Check List.....	A-44
Figure A.8 FS 695 - Provincial Office Check of Field Cruise Data	A-45
Figure A.9 FS 696 - Provincial Field Check Cruise Summary.....	A-46
Figure A.10 FS 697 - Provincial Compilation Check Form	A-47
Figure A.11 Dead Potential White Pine Log Grade Algorithm.....	A-53
Figure A.12 Interior Hemlock Algorithm.....	A-54
Figure A.13 Suspect Trees.....	A-60

Figure A.14 Example of *P. schweinitzii*. A-63

Figure A.15 Example of Blind Conk in a Knot. A-64

Figure A.16 Non-blind Conk in a Knot. A-65

Figure A.17 Blind Conk and Sound Knot..... A-66

Figure A.18 Residual and Suspect Indicators and Their Host Species..... A-67

Figure A.19 Open Scars A-68

Figure A.20 Root Scars..... A-69

Figure A.21 Closed Scars. A-69

Figure A.22 Scars Caused by Rock Slides and Falling Rocks A-72

Figure A.23 Cankers Caused by Fungi. A-73

Figure A.24 Types of Forks and Crooks Which are Recorded..... A-75

Figure A.25 Fork or Crook and/or Dead or Broken Top A-76

Figure A.26 Fork/crook. A-77

Figure A.27 Appearance of Frost Crack on Standing Trees A-78

Figure A.28 Trunk Infections of Mistletoe A-79

Figure A.29 Branch Infections of Mistletoe A-79

Figure A.30 Rotten Branches..... A-80

Figure A.31 Flutes A-82

Figure A.32 Candelabra Branches A-83

Figure A.33 Branch Fans A-83

Figure A.34 Black Knots A-84

Figure A.35 Burls and Galls A-84

Figure A.36 Sweep..... A-85

Figure A.37 Exposed Roots. A-85

Figure A.38 Bird Damage..... A-86

Figure A.39 Illustrates Forks and Crooks Which are Not Suspect A-87

Figure A.40 Suspect Indicators..... A-93

Figure A.41 Residual Indicators A-125

Figure A.42 Forest Region and District Boundaries..... A-130

Figure A.43 Fdc – Coastal Douglas-Fir..... A-139

Figure A.44 Hwc – Western Hemlock - Coast. A-141

Figure A.45 Fdi – Interior Douglas-Fir..... A-142

Figure A.46 Hwi – Interior Western Hemlock A-143

Figure A.47 Act – Black Cottonwood - Provincial..... A-145

Figure A.48 At - Trembling Aspen - Provincial A-146

Figure A.49 Ba – Amabilis Fir – All Balsam Species - Provincial A-148

Figure A.50 Cw – Western Redcedar - Provincial A-150

Figure A.51 Dr - Red Alder - Provincial A-151

Figure A.52 Lw – Western Larch – Provincial..... A-152

Figure A.53 Pli – Lodgepole Pine - Provincial..... A-153

Figure A.54 Pw – Western White Pine – Provincial A-154

Figure A.55 Py – Ponderosa Pine – Provincial..... A-155

Figure A.56 Sb – Black Spruce – Provincial A-156

Figure A.57 Ss – Sitka Spruce - Provincial A-158

Figure A.58 Sw – White and Englemann Spruce - Provincial A-159

Figure A.59 Map showing difference between True North and Grid North A-173

2.3 Sampling Error Objectives

Unless otherwise specified, sampling error objectives are based on full measure and count plots and are based on the total stand net merchantable volume prior to any partial harvest reductions.

The following standards apply to both clearcut and partial retention harvest systems.

The minimum requirement for the establishment of a full measure plot is as follows:

- i. cutting authorities < 250 ha: a 200 meter grid or 4.0 hectares per plot (per timber type).
- ii. cutting authorities > 250 ha: a 250 meter grid or 6.25 hectares per plot (per timber type).

For coastal cruises, a ratio of three (3.0) count plots to one (1.0) full measure plot cannot be exceeded on the cruise plan even if sampling error is achieved.

For cruises where cruise grades will be used in the appraisal, the minimum tree count must be met even if the sampling error requirement has been achieved.

For coastal cruises where cruise grades will not be used in the appraisal and for all interior cruises, there is no required minimum number of trees per plot when the sampling error requirement is achieved.

The minimum tree count requirements include tree classes 1, 2, 3, 5, 7, 8, 9 and not tree classes 4 and 6.

There is no need to change count plots to measure plots in the field if measure plots are dropped due to boundary influence in the field, provided the correct measure/count ratio is identified on the cruise plan and the minimum number of measure plots per type has been achieved (see Section 2.4).

The following table serves as a guide to the various cruising standards itemized below:

Situation		Section that details the applicable cruising standard	
Rights of Way		2.3.6	
Coastal Cutting Authority	Northern Great Bear Rainforest	Cruise Based Cutting Authority	2.3.5
		Cruise Based Road permit	2.3.6 (1)
		Road Rights of Way appraised with adjacent cutblock	2.3.6 (2)
	Non-Northern Great Bear Rainforest	Cruise Based	2.3.4
		Scale Based	2.3.1
Interior Cutting Authority	At least 35% of net merchantable volume of all coniferous species is red and grey attack Lodgepole Pine		2.3.3
	Less than 35% of net merchantable volume of all coniferous species is red and grey attack Lodgepole Pine	General Cruise Based	2.3.2
		Scale Based	2.3.1

For further guidance, refer to *Policy 13.7 Timber Cruising* at the following Internet site:
<https://gww.nrs.gov.bc.ca/flnr/timber-pricing/timber-measurement-policies>

2.3.1 Scale Based Cutting Authorities

- Unless otherwise stated, the scale based cutting authority sampling error objective is 15.0% at 2 SE based on the total stand net merchantable volume prior to any partial harvest reductions.
- Single Stem – the options are:
 - i. 100% cruise of the cut trees,

- ii. Achieve at least a 15.0% sampling error on the cut trees at 2 SE using variable radius plots, or
- iii. Sample using at least 2 variable radius measure plots/ha and at least 2.0 cut trees/plot.

The sampling error requirement will be waived if all of the following conditions have been met:

1. For cutting authorities of 20.0 ha or larger in size:

- a. A 100 metre by 100 metre systematic grid has been established and a maximum of 1.0 count plot to 1.0 full measure plot has not been exceeded and an average of at least 4.0 trees per plot has been met.
- b. A 70 metre by 70 metre systematic grid has been established and a maximum of 1.0 count plot to 1.0 full measure plot has not been exceeded and an average of at least 2.0 trees per plot has been met.
- c. A 50 metre by 50 metre systematic grid has been established and a maximum of 1.0 count plot to 1.0 full measure plot has not been exceeded and an average of at least 1.0 tree per plot has been met.

2. For cutting authorities less than 20.0 ha in size:

- a. A 100 metre by 100 metre, systematic grid of full measure plots has been established and an average of at least 4.0 trees per plot has been met.
- b. A 70 metre by 70 metre, systematic grid of full measure plots has been established and an average of at least 2.0 trees per plot has been met.
- c. A 50 metre by 50 metre, systematic grid of full measure plots has been established and an average of at least 1.0 tree per plot has been met.

If the minimum tree count cannot be achieved with a BAF 2 prism, then the minimum tree count requirement will be waived.

2.3.2 General Cruise Based Cutting Authorities – Interior Only

The following standards apply to all general cruise based cutting authorities **within the Interior area as described in the [Interior Appraisal Manual](#)**:

1. 8.0% at 2 SE on all plots, and
2. If count plots are used, a 2 SE of 12.0% on full measure plots must be achieved.

All other scale based standards apply, except that the sampling error cannot be waived.

2.3.3 Mountain Pine Beetle Cruise Based Cutting Authorities

The following standards apply to all MPB cruise based cutting authorities:

1. Each block within the cutting authority must contain at least 35% red and grey attack Lodgepole pine net merchantable volume of all coniferous species. The net volume is the post-reduction cruise volume compiled to the interior standard merchantability specifications.
2. Cutting authorities must:
 - achieve a 12.0% sampling error objective at 2 SE using measure and count plots, or
 - the sampling error will be waived as per the scale based standards specified in section 2.3.1 (1) or (2).
3. Cutting authorities that do not meet the MPB standards must meet the standards in section [2.3.2](#) to be a cruise based cutting authority.

2.3.4 General Cruise Based Cutting Authorities – Coast Only

The following standards apply to all general cruise based cutting authorities **within the Coast area as described in the [Coast Appraisal Manual](#)**:

Cutting authorities must:

1. achieve a 10.0% sampling error objective at 2 SE using measure and count plots, and an average of at least 4.0 trees per plot, or
2. The sampling error will be waived if the following conditions have been met:
 - a. For cutting authorities of 40.0 ha or larger in size:
 - i. A systematic grid of equal intervals and spacing of not greater than 100 metres by 100 metres has been established, and
 - ii. Only full measure plots are used and an average of at least 4.0 trees per plot has been met.
 - b. For cutting authorities less than 40.0 ha in size:
 - i. A systematic grid of equal intervals and spacing of not greater than 70 metres by 70 metres has been established, and
 - ii. A maximum ratio of 1.0 count plot to 1.0 measure plot has not been exceeded and an average of at least 4.0 trees per plot has been met.
 - c. In addition, within any stand-alone polygon less than 5 ha in size (regardless of cutting authority size) the following requirements must be met:
 - i. A systematic grid of equal intervals and spacing of not greater than 70 metres by 70 metres has been established, and

- ii. A maximum ratio of 1.0 count plot to 1.0 measure plot has not been exceeded.

Cruise based cutting authorities subject to the [Coast Appraisal Manual](#) are not subject to the requirements specified in Policy 8.16 or the associated procedures. In addition, cruise based cutting authorities under this section will not require loss factor cruising as Call Grade Net Factor (CGNF) cruising will be used for appraisal purposes.

Please note that for general cruise based cutting authorities within the Coast area, percent reductions (See Section 5.9) are not permitted and the net merchantable volume will be based upon 100% removal of the net merchantable area.

2.3.5 Cutting Authorities within the Northern Great Bear Rainforest

The following standards apply to all cruise based cutting authorities within the Northern Great Bear Rainforest (GBR) as defined within the [Coast Appraisal Manual](#):

Cutting authorities must:

1. achieve a 10.0% sampling error objective at 2 SE using measure and count plots, and an average of at least 4.0 trees per plot, or
2. The sampling error will be waived if the following conditions have been met:
 - a. For cutting authorities of 40.0 ha or larger in size:
 - i. A systematic grid of equal intervals and spacing of not greater than 100 metres by 100 metres has been established, and
 - ii. Only full measure plots are used and an average of at least 4.0 trees per plot has been met.
 - b. For cutting authorities less than 40.0 ha in size:
 - i. A maximum ratio of 1.0 count plot to 1.0 measure plot has not been exceeded,
 - ii. An average of at least 4.0 trees per plot has been met, and:
 - a) A systematic grid of equal intervals and spacing of not greater than 70 metres by 70 metres has been established, or
 - b) A systematic grid of full measure plots not greater than 100 metres by 100 metres has been established with count plots offset halfway between the measure plots along either the North-South or East-West grid lines. For example, where ‘o’ represents measure plots and ‘x’ represents count plots, the following two designs are acceptable:



Cruise based cutting authorities in the Northern GBR are not subject to the Cruise Based Billing loss factor requirements specified in Policy 8.16. In addition, until CGNF is used for appraisal purposes on the Coast, cutting authorities in the Northern GBR will not require CGNF cruising.

2.3.6 Rights of Way Cruises

1. Rights of Way cruises must:
 - i. Meet the 15.0% sampling error requirement using fixed or variable radius plots, or
 - ii. Establish a full measure variable plot every 100 metres along the right of way centre line. The first plot should be located at 50 metres (half the interplot distance) from the start of the centre line.
2. Where BCTS or Coastal Cruise Based (see Sections 2.3.4 and 2.3.5) road rights of ways external to a cutblock are to be cruised and appraised with the cutblock harvest area, the following three options are available:
 - i. Extend the cruise grid of the adjacent timber type through the road right of way and establish any plots that fall within the right of way, or
 - ii. Identify the road right of way as a separate type at the cruise plan stage and establish a full measure variable plot every 100 metres along the right of way centre line. The first plot should be located at 50 metres (half the interplot distance) from the start of the centre line within that type; or
 - iii. Submit a rationale from a qualified registered professional stating the cruise data from the cutblock is representative of the road rights of way area.
3. Where timber on road rights of way within a cutblock is removed under a road permit (RP) after the block is cruised, the cruise plots that are within the area of the RP shall be included in the cruise compilation for the cutting permit and the area of the RP will be removed from the cruise compilation.
4. Rights of way areas not removed under a road permit must be included in the net merchantable area and must be sampled.

2.4 Sampling Patterns – General Conditions

Plots established within cutblocks from previous operational cruises may be used in new sampling plans if they meet the standards in this manual.

The minimum standards for appraisal cruising require the use of sampling techniques using systematic grids to locate the plots. The exception is a 100% cruise where all trees within the cutblock are measured.

All plots must originate from the net merchantable area. Plots in areas 100 percent reserved from cutting must not be used in the compilation.

Plots can be established using a predetermined management unit specific GIS grid or by using a local cutblock level grid system. Licensees must notify the district of which grid system they will be using. Once a grid system is selected by a licensee, it is to be used on all cruise plans completed by that licensee within an identifiable unit (e.g. a license management unit, operating area or drainage). In addition, the grid system must be consistent in each cutting authority. Grid system (see [Definitions](#)) refers to a GIS or local grid, and does not include grid interval.

The cruise plan must identify the grid interval for each timber type polygon.

The MFLNRO must be able to replicate plot location. The District office may request a copy of the grid and/or the method used to create the GIS grid.

2.4.1 Standards for the Location of Plots Using a Grid

The following section describes the types of grids that may be used in a cruise plan:

- a. GIS Grid: The grid locations are predetermined by the local management unit GIS grid.

If count plots are used in the cruise design, the most westerly plot on the most southerly line in the net merchantable area must be a measure plot.

- b. Local Grid: A local grid may be established using the following procedure:

- i. Project a line due south from the most western point of the net merchantable area and another line due west from the most southern point of the net merchantable area. Starting at the point of intersection of these two lines, lay the local plot grid on the map oriented in cardinal directions (N-S & E-

W) to determine the plot locations (see [Figure 2.1 Example of Local Grid Design](#)).

- ii. If count plots are used in the cruise design, the most westerly plot on the most southerly line in the net merchantable area must be a measure plot.

All possible sample points that can be established in the net merchantable area must be cruised, whether or not they were included in the original cruise plan. All plots must originate from the net merchantable area.

Plots cannot be moved within a timber type polygon, except as required in Section [2.4.2](#) to achieve the minimum number of plots in a timber type polygon.

The grid may be square or staggered, however the option selected must be used consistently in each cutblock.

The cruise grid will be considered acceptable if the count to measure distribution is systematic and unbiased, and if the grid is established consistent with the above requirements. If the cruise plan is designed to waive sampling error as per the requirements of Section [2.3.1](#) or [2.3.3\(2\)](#), the count to measure ratio requirement will be waived if the grid design is consistent with Section [2.4.1](#) and the grid spacing and trees per plot are consistent with Section [2.3.1](#).

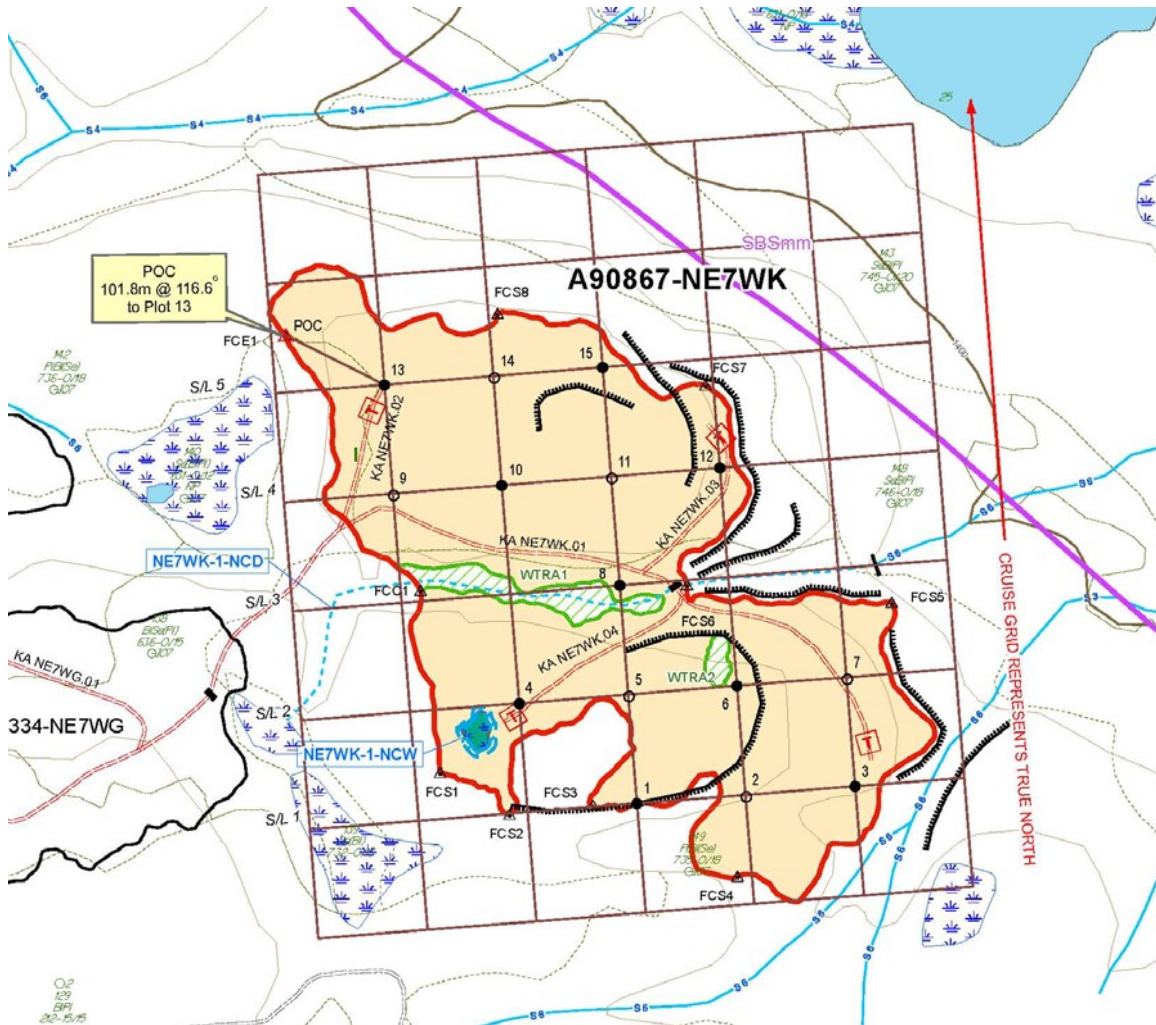


Figure 2.1 Example of Local Grid Design.

* **Please note** – This example of a local grid is oriented to true north instead of map north. For a detailed explanation of the difference in these terms, please see [True North, Magnetic North and Grid North](#) in the Appendices. Some districts may prefer for cruise maps to be submitted with grids oriented to grid north – please refer to district or regional contacts for further information.

2.4.2 Standards for the Location of Additional Plots to Meet Section 2.2 Requirements

The following sections describe the situations and procedures to establish additional plots where the grid design does not meet the minimum one or two full measure plot per timber type polygon standard specified in Section [2.2](#).

2.4.2.1 Office Cruise Plan Procedure

Within the timber type, reduce the grid interval (using the same grid system) on the cruise plan by increments of 10 metres until the largest grid spacing that will meet the minimum plot establishment standards is achieved.

2.4.2.2 Field Procedure

In the event that in the field, plots fall outside the timber type polygon, then use the procedure in the following table to establish the plot(s) inside the timber type polygon:

Sequence	Location	Sequence	Location	Sequence	Location	Sequence	Location
1	1/2 Grid North	2	1/2 Grid East	3	1/2 Grid South	4	1/2 Grid West
5	1/4 Grid North	6	1/4 Grid East	7	1/4 Grid South	8	1/4 Grid West
9	1/8 Grid North	10	1/8 Grid East	11	1/8 Grid South	12	1/8 Grid West
13	1/16 Grid North	14	1/16 Grid East	15	1/16 Grid South	16	1/16 Grid West

The procedure will be applied from the planned plot locations that fell outside the timber type polygon in the field. This procedure is used to obtain the required number of plots in the timber type polygon. If the plot cannot be established inside the timber type polygon using this procedure, attempt to establish the plot using this procedure with NE, NW, SE or SW bearings.

2.4.3 Standards for the Location of Additional Plots to Meet Sampling Error

Where plots must be added to an existing cruise to meet the sampling error requirement, they must be added in a systematic random manner. It is recommended to target the timber type (s) with the greatest variability. Determine the number of plots required

using the coefficient of variation statistic for the timber types from the compilation (See [Coefficient of Variation](#) in the Appendices).

The following procedures will be used where additional plots must be added to an existing cruise to meet the sampling error standard:

1. New Grid Design

- a. Determine a new grid design that will meet the new sample size requirements, using the same cruise grid orientation.
- b. If using a local grid, over-lay the new grid by positioning the new plot grid over top of the original plot grid at the point of intersection (See Section [2.4.1](#) (b)).
- c. If using a GIS grid, over-lay the new grid by positioning the first plot of the new grid over the most westerly plot on the most southerly line of the original grid (in the net merchantable area). Disregard the overlapping plot.

2. Existing Cruise Design

Additional plots must be systematically located on the existing cruise strips.

2.5 Other Timber Cruising Conditions

This section describes the timber cruising procedures that are required for situations where timber must be re-cruised, where it is unsafe to cruise, where patch cuts are used and where there is a combination of Timber Licence and Crown lands.

2.5.1 Standards for Re-cruising

Re-cruising is required:

1. If the cruise is of mature timber (> 120 years) and 10 years has elapsed since the fieldwork was performed.
2. If the cruise is of immature timber (< 121 years) and 5 years has elapsed since the fieldwork was performed.
3. If required in a reappraisal as outlined in the [Coast or Interior Appraisal Manuals](#).
4. As required by a check cruise (Chapter [3 Quality Assurance](#)).
5. As determined by the Regional Executive Director.

2.5.2 Unsafe to Cruise

Where it is unsafe for cruisers to sample the stand, the preferred methodology is to establish cruise plots in the same timber type (where it is safe to cruise) adjacent to the unsafe area.

The sampling intensity must be sufficient to reliably estimate the attributes of the unsafe area.

As appropriate, the damage codes will be determined by a procedure subject to mutual agreement by the licensee and the Regional Executive Director, or Timber Sales Manager and Regional Executive Director.

If an individual plot cannot be completed safely, it will be dropped and the reason documented.

2.5.3 Cruising Patch Cut Silviculture Systems

The following sampling procedure must be used for cruising patch cuts:

1. Outline the proposed block including the outside boundaries of the patches.
2. Overlay an appropriate grid over the gross block area that will ensure the sampling design requirements are achieved on the entire block area (See Section [2.3](#)).

3. Patches that are 1.0 ha in size or greater will be unique timber types and will have the required minimum number of plots (See Section [2.2](#)).
4. Patches smaller than 1.0 ha may be aggregated and considered as one timber type in the compilation. These aggregated areas may be considered “partial cut” in the Interior for appraisal cost estimate purposes. Cruise data for this timber type should be representative of the patch cut areas.
5. Areas between the patches may be compiled as a unique timber type (Example 1) or aggregated with patches smaller than 1.0 ha as one unique timber type (Example 2). Appropriate percent reductions are to be applied in the compilation.

Example 1 (Refer to [Figure 2.2 Example of Patch Cut block](#)):

Gross Block – 30.0 hectares. Cruise grid covers the whole block.

Type 1: 12 patches less than 1.0 hectare each. Total = 6.0 ha (Patches identified as letters A to L)

Type 2: area between all the patches where some incidental volume will be removed, 15.0 hectares (e.g. skid trails and selection harvest = 20% volume removal or 80 % volume reduction)

Type 3-8: 6 patches, each one is greater than 1.0 ha, totalling 9.0 ha. Each patch must be cruised. (Patches identified as numbers 1-6)

Total of 15.0 ha clearcut and 15.0 ha at 80% volume reduction

Example 2 (Refer to [Figure 2.2 Example of Patch Cut block](#)):

Gross block area – 30.0 hectares

Types 1-6: 6 patches, each one is greater than 1.0 ha, totalling 9.0 ha. Each patch must be cruised. (Patches identified as numbers 1-6)

Type 7: Area between patches and patches less than 1.0 ha (total 21.0 ha)
Amount of harvest on skid trails and incidental harvest between patches = 3.0 ha

12 patches equalling 6.0 ha (Patches identified as letters A to L)

$(6.0 + 3.0) / (30.0 - 9.0) = 9.0 / 21.0 = 42.9\%$ to be removed (57.1% volume reserved)

Total of 9.0 ha clearcut (Types 1-6) and 21.0 ha at 42.9% volume reduction (Type 7)

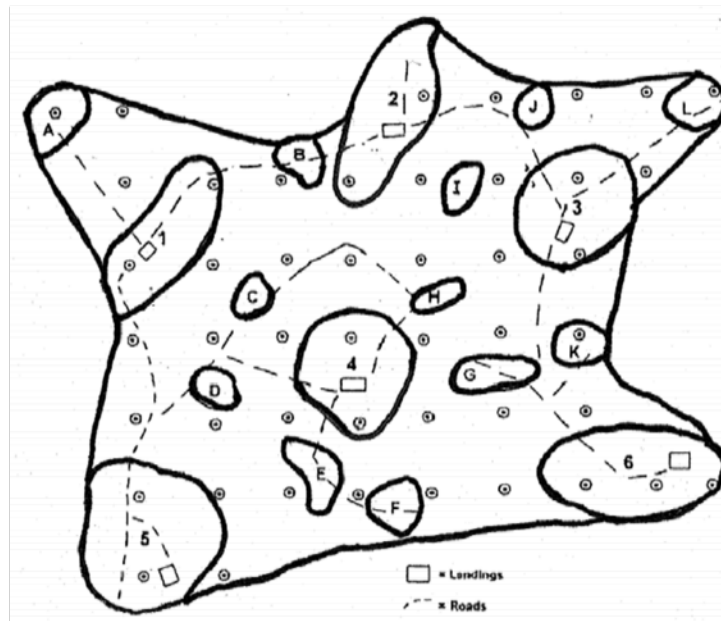


Figure 2.2 Example of Patch Cut block.

2.5.4 Schedule "A" (Timber Licence) and "B" (Crown) Lands

Schedule "A" and "B" lands in a Tree Farm Licence (TFL) can be cruised, compiled and appraised together, but a separate summary page in the compilation is required for both timbermarks.

Schedule "A" and "B" lands not in a TFL can be cruised together, but must have separate compilations because they must be appraised separately. If a cutblock contains both Schedule "A" and "B" lands, all plots in the cutblock must be used in both of the compilations.

Timber Licence and other Crown land in a Tree Farm Licence (TFL) can be cruised, compiled and appraised together, but a separate summary page in the compilation is required for both cutting authorities.

Timber Licence and other Crown land not in a TFL (i.e., in a Forest Licence) can be cruised together, but must have separate compilations because they must be appraised separately. If a cutblock contains both Timber Licence and other Crown lands, all plots in the cutblock must be used in both of the compilations.

2.6 Types of Cruises

2.6.1 One Hundred Percent Cruise

A 100% cruise requires that all trees are measured as per the appraisal specifications.

Each tree in a 100% cruise cutting authority must be numbered or marked as a cut tree.

2.6.2 Fixed Area Plot Sampling (See Section [4.3.1.13](#))

Fixed area plot sampling is a method of using sample plots with a fixed size (area) for selecting the trees to be tallied. The plots are normally circular or square. It is also known as sampling without replacement since trees are not included in more than one sample plot.

The fixed area plot size must be consistent by timber type and count plots are not permitted in fixed area plots. Border plots are permitted in fixed area plots.

For additional information on fixed area plots and calculating sample size, please see the appendix on [Additional Sampling Information](#).

2.6.3 Variable-Plot Sampling (Prism or Relascope)(See Section [4.3.1.15](#))

Variable plot sampling is a method of selecting trees to be tallied based on their size and not the frequency or density of the trees in the stand. The main advantage with using the variable plot instead of the fixed area method is that the probability of tree selection is proportional to the size (basal area at breast height) of the tree. Variable plots are more efficient to measure than fixed area plots because a plot perimeter is not required since every tree has its own plot radius and can be assessed for in/out status with an angle gauge (e.g., prism or relascope).

For additional information on variable plot sampling, calculating sample size, and calculating coefficient of variation (CV) please see the appendix on Additional Sampling Information.

2.7 Double Sampling (See Section [4.3.1.10](#))

Double sampling consists of sampling certain characteristics within a sample instead of measuring those characteristics throughout the sample. Double sampling improves the volume estimate by species.

Double sampling requires the use of two types of prism plots, the measure plot and the count plot. The measure and count plots together represent the main sample. Fixed radius plots are not used in this form of double sampling.

2.7.1 Measure Plots

The measure plots are conventional samples in which all variables for each tree are measured.

2.7.2 Count Plots

Count plots are samples where only the tree species and plot slope are tallied. All live and dead potential trees are tallied. Do not include any trees below the DBH limit or tree class 4 (dead useless) and tree class 6 (live useless) trees. DBH or DBH classes must be recorded where timber merchantability specifications may indicate a different DBH limit level from the field tally level.

Within each timber type, measure tree data is required in the measure plots for each species recorded in the count plots. Occasionally, a species is tallied in a count plot that has not been tallied in a full measure plot. This creates a situation where no measure data is available to compile the tree. This tree is called an 'orphan tree'.

The procedure for dealing with orphan trees in count plots during the fieldwork is to record the measure information for the first occurrence (first tree from facing north (0°) and turning clockwise within the count plot) of the orphan species within the first count plot where the orphan species is encountered. If the orphan species is not measured in a measure plot in the same timber type, the data from the orphan species tree will be moved to the nearest measure plot in the timber type and will be deleted from the count plot.

This procedure will be completed after the fieldwork is complete or at the compilation stage. Orphan trees moved from a count plot to a full measure plot should be recorded using tree numbers 99, 98, 97, etc. Consideration will be given to waiving the sampling error if the minimum sampling error requirement is exceeded due to the shift in the tree count.

2.8 Forest Typing

Forest types are areas of land identified on a cruise plan map with similar timber characteristics. They are generally identified from aerial photos and may increase sampling efficiency and provide a more accurate estimate of timber volume and value. For more information on the general principles and procedures that may be used to describe forest types, see the document titled 'VRI Photo Interpretation Procedures' at the following web link:

www.for.gov.bc.ca/hts/vri/standards/photo.html

Appraisal cruising recognizes four categories of stratification:

- 1. Forest Types (Timber Types):** Generally describe areas of similar inventory forest cover composition (e.g., first and second leading species by volume, age, height and site class). These areas contain merchantable timber and are sampled for appraisal. Timber type polygons must be contiguous and unique to each cutblock.
- 2. Non-Forest Types:** These areas are not sampled for appraisal (i.e., rock bluff, swamp, constructed linear tenure, creek, riparian reserve area, slide track and gravel pit). A non-productive area can be less than one hectare in size, but typing out of non-productive areas must be consistent (e.g., if a 0.5 ha non-productive area is typed out then all non-productive areas 0.5 ha and larger must be typed out).
- 3. Forest Reserves:** Describe areas reserved from harvest due to forest management purposes (e.g., Goshawk nest, visual quality reserve, wildlife tree patch). These areas may contain merchantable timber but are not sampled for appraisal.
- 4. Silviculture Treatment Units:** Describe areas that will receive different forms of silvicultural or harvest treatments. (e.g., stumping for root rot and partial cutting areas). These areas contain merchantable timber and are sampled. Treatment units may consist of an entire timber type, a portion of a timber type or a portion of multiple timber types.

2.9 Comparative Cruises

The [Interior Appraisal Manual](#) specifies the situations when comparative cruise data may be used for appraisal purposes.

The use of comparative cruise data is an exception and must be approved by the Regional Executive Director, except for Cruise Based Salvage Cutting Authorities (See Section 2.9.1). Sample design and methods used in a comparative cruise are subject to mutual agreement between the licensee and Regional Executive Director.

2.9.1 Cruise Based Salvage Cutting Authorities

For the purposes of those cutting authorities defined as cruise based salvage in the *Interior Appraisal Manual*, the comparative cruise method is as follows:

1. A qualified registered or associate member (RPF, RFT, ATE) of the ABCFP must provide a signed estimate of the:
 - a. average total height of the merchantable conifer stems in the cutblock
 - b. average total stems per hectare of merchantable coniferous and deciduous trees (standing and down) in the cutblock.
2. The registered or associate member of the ABCFP providing the estimate must include a description of how the estimate was generated and relevant supporting information.
3. The estimate will be used in the following table to generate a total coniferous and deciduous net merchantable volume per hectare:

Table 2-1: Total coniferous and deciduous net merchantable volume per hectare (m³/ha) estimates for Cruise Based Salvage Cutting Authorities

Average Total Stems per Hectare of Merchantable Coniferous and Deciduous	Average Total Height (m) of Merchantable Coniferous Stems							
	<15	15-16	17-18	19-20	21-22	23-24	25-26	27+
200-299	45	45	45	80	120	163	210	260
300-399	45	45	56	91	131	174	221	271
400-499	45	45	67	103	142	185	232	283
500-599	45	47	78	114	153	196	243	294
600-699	45	58	89	125	164	207	254	305
700-799	45	69	101	136	175	218	265	316
800-899	45	80	112	147	187	230	277	327
900-999	45	91	123	158	198	241	288	338
1000-1099	56	103	134	170	209	252	299	350
1100-1199	68	114	145	181	220	263	310	361
1200-1299	79	125	157	192	231	274	321	372
1300-1399	90	136	168	203	242	285	332	383
1400-1499	101	147	179	214	254	297	344	394
1500-1599	112	158	190	225	265	308	355	406
1600-1699	123	170	201	237	276	319	366	417
1700-1799	135	181	212	248	287	330	377	428
1800-1899	146	192	224	259	298	341	388	439
1900+	157	203	235	270	309	352	399	450

This page is intentionally left blank.

Index

1

100% Cruise, **1-3**, 2-6, 2-11, 2-18, 4-12, 6-3, 6-7

A

ABCFP, **1-1**, 1-2, 2-3, 3-18
 Absolute Variation, **1-3**, 3-8
 Accuracy, **1-3**
 Age in 10's, 3-10, **4-9**, 6-5
 Ages, 3-10, **4-38**, A-88, A-161
 Algorithms, 4-10, 4-36, 4-47
 Area Error, **3-15**

B

BAF, 1-3, 1-4, 1-6, 2-7, 4-14, 4-15, **4-17**, 4-23, A-5
 BC Timber Sales. *See* BCTS
 BCTS, **1-3**, A-129
 BEC zones, 5-10
 Bias, **1-3**
 borderline trees, 3-6, 3-7, 4-13, 4-15, 4-16, 4-18
 breast height. *See* DBH
 burls, 4-32, A-62, A-73, **A-84**

C

candelabra, 4-45, A-75, A-81, **A-83**
 CGNF, 1-5, 3-9, **4-2**, 4-28, 4-29, 4-32
 check cruise, 2-15, **3-6**, 3-9, 3-10, 3-17, 4-9
 closure error, **1-3**, 3-15
 coefficient of variation, **1-4**, A-6, A-7
 comparative cruises, **2-22**
 count plots, **1-4**, 2-5, 2-7, 2-11, 2-18, 2-19, 2-20, 3-4, 3-7, 3-8, 4-9, 4-16, 4-22, 4-24, 5-10, 5-23, A-2

crown class, **1-4**, 6-17
 cruise based, **1-4**, 2-7
 cruise compilation, **1-9**, 5-4, 5-5, 5-6, 5-8, 5-20, A-14, **A-49**, A-52
 cruise map, 2-4, 3-2, 5-14, 5-17
 cruise plan map, **3-3**
 cruise plans, 2-3
 cruise tally sheet, **2-20**, **4-2**, 4-3, 4-4, 4-7, 4-48, 6-8, 6-13, 6-19, 6-20, A-31, A-35, A-36, A-137
 CV. *See* Coefficient of Variation

D

damage codes, 2-15, 3-9, **A-31**
 DBH, 1-3, **1-4**, 1-6, 2-19, 3-10, 3-11, 4-11, 4-12, 4-14, 4-16, 4-17, 4-22, 4-23, **4-30**, 4-32, 5-12, 6-2, 6-3, 6-4, 6-5, 6-8, 6-9, 6-14, 6-15, 6-17, 6-18, 6-21, 6-22, 6-23, A-4, A-35, A-40, A-160, A-161
 dead potential, 2-19, 3-7, 3-8, 3-11, 4-11, **4-35**, 4-36, 4-42, 4-44, 4-47, 6-15, A-36, A-40, A-61
 dead useless, 2-19, 3-7, 4-22, **4-36**
 decay, **1-4**, 1-7, 1-8, 4-35, 4-36, 4-37, 4-42, 4-47, 6-4, 6-5, A-15, A-16, A-18, A-28, A-59, A-61, A-62, A-63, A-69, A-70, A-71, A-73, A-74, A-78, A-80, **A-81**, A-82, A-83, A-84, A-85, A-86, A-88, A-89, A-90, A-91, A-92, A-93, A-94, A-96, A-97, A-98, A-99, A-100, A-101, A-102, A-103, A-104, A-105, A-106, A-108, A-109, A-110, A-111, A-112, A-113, A-114, A-115, A-116, A-117, A-118, A-119, A-126, A-127, A-128
 decay, waste and breakage. *See* DWB
 deciduous, 4-28, 5-8, A-29, A-87
 Diameter Breast Height. *See* DBH
 diopter, 1-3, 1-4, 4-14, A-4, A-5

district manager, 2-3, 2-4, 2-15,
3-17 DWB, **1-4**, 6-4

E

elevation, 5-5

F

fixed area plot sampling, **1-5**, **2-18**, **A-2**
fixed plots. *See* Fixed Area Plot Sampling
FIZ, **1-7**, 4-34, 4-37, 5-4, 5-12, 6-2, 6-4,
6-5, 6-17, A-14, A-15, A-16, A-17, A-18,
A-19, A-20, A-21, A-22, A-23, A-24, A-25,
A-26, A-27, A-131, A-132, A-133, A-134,
A-135, A-136, A-162, A-164, A-166, A-168
flutes, **A-82**
Forest Inventory Zone. *See* FIZ

G

galls, 4-32, A-73, **A-84**, A-125
Global Positioning System. *See* GPS
GPS, **1-5**, 1-8, 3-12, 3-15, 3-18, 4-2, 4-8,
A-12, A-13
grids, 2-8

H

harvesting method, **4-23**, 5-17
height, 1-3, 3-8, 3-10, 3-11, 4-11, 4-12, **4-24**,
4-25, 4-26, 4-27, 6-2, 6-13, 6-14, 6-15, 6-17,
6-18, 6-21, 6-22, 6-23, A-8, A-40, A-131,
A-137, A-160, A-170
height DBH curve, 6-4, 6-9
high side, 1-3, **1-5**, 3-10, 4-30, **4-32**, 4-42,
4-46, 6-15, 6-17, 6-18

I

inter-station distance, 3-15

L

leaning and down trees, **4-17**, 4-30
live useless, 2-19, 3-7, **4-37**
loss factor, 1-1, **1-5**, 3-9, 3-10, 4-9, 4-10,
4-11, 4-28, 4-35, 5-4, 6-3, A-14, A-15, A-18,
A-31, A-34, A-36, A-59, A-61, A-70, A-75,
A-78, A-81, A-82

M

Magnetic Declination, **A-55**
Map Area Statement, 4-22, **5-1**
measure plots, 2-3, 2-6, 2-11,
2-19 minimum tree count, 2-5,
2-11 mountain pine beetle. *See*
MPB MPB, 2-11, 3-15, A-116

O

orphan trees, **2-19**, 2-20

P

patch cuts, **2-15**
Pathological Indicators, **1-6**, 1-7, 1-8, 3-9,
3-11, 4-34, 4-35, 4-41, **4-42**, 6-8, A-35,
A-37, A-52, A-59, A-61, A-70, A-74, A-76,
A-131
blind conk, 1-6, 1-7, 1-8, 4-42, A-34,
A-61, A-63, A-64, A-66, A-132
conk, 1-6, 1-7, 1-8, 4-37, A-34, **A-58**
A-61, A-62, A-63, A-64, A-88, A-119,
A-132, A-133, A-134, A-135
crook, 1-6, 1-7, 1-8, 4-35, 4-41, A-59,
A-71, A-74, A-75, A-77, A-131, A-133,
A-134, A-135
dead or broken top, 1-6, 1-7, 1-8, 4-35,
A-76, **A-81**
fork, 1-6, 1-7, 1-8, 4-30, 4-35, 4-41, 4-42,
A-71, A-74, A-76, A-77, A-81, A-83, A-
131, A-133, A-134, A-135
frost crack, 1-6, 1-7, 1-8, 4-35, 4-42,
A-78, A-131, A-132, A-133
mistletoe, 1-6, 1-7, 1-8, 4-35, A-74,
A-79, A-108, A-132, A-133
rotten branch, 1-6, **A-80**, A-131, A-132,
A-133
scar, 1-6, 1-7, 1-8, 4-37, 4-42, **A-67**,
A-68, A-69, A-70, A-72, A-73, A-76,
A-77, A-82, A-86, A-90, A-94, A-133
percent reduction, **1-6**, **5-20**, 5-21, 5-22
plot centre, 3-6, **3-12**, 3-16, **4-8**, 4-9, 4-13,
4-14, 4-15, 4-16, 4-17, 4-18, 4-22, 4-24,
4-30, 6-7, 6-14
Plot centre, 3-12
plot radii slope allowance, **4-13**, A-50, **A-51**

plot radius factor. *See* PRF
 plot slope, 3-16, **4-24**
 POC, **4-8**
 POG. *See* Point of Germination
 Point of Commencement. *See* POC
 point of germination, 1-3, **4-30**, 6-4, 6-7, A-70
 precision, 1-4, **1-6**, A-5
 PRF, **1-6**, **4-17**
 professional reliance, 2-4
 PSYU, **1-7**, 3-4, 3-9, 4-11, 5-5, 5-7, A-14, A-15, **A-18**, A-19, A-20, A-21, A-22, A-23, A-24, A-25, A-26, A-27, A-161
 Public Sustained Yield Unit. *See* PSYU

Q

Quality Indicators, 3-11, 4-2, **4-40**, 4-44
 knot, 3-11, A-63, A-64, A-65, A-66
 knots, 4-44, **4-45**, 4-46, A-84
 lean, **4-44**
 live limb, **4-44**, 4-45
 spiral grain, 3-11, **4-42**, A-86
 stub, **4-44**, 4-45
 sweep, **4-44**

R

regional executive director, 2-2, 2-15, 2-22, 3-6, 3-17, 4-24, 5-7, 5-23
 re-sweep, 3-9, 3-10
 rights of way, **2-5**
 risk groups, **1-7**, 4-35, A-18, **A-128**

S

safety, **1-1**, 1-5, **2-15**, 6-2
 sampling error, **1-6**, **1-7**, **2-5**, 2-6, 2-7, 2-10, 2-16, 6-3, 6-7, A-3, A-5
 second growth, 3-10, **4-10**, 4-11, 5-20
 site class, **1-7**, 2-21, A-170
 Site Index, **A-137**
 slope, **3-16**, 4-7, 4-13, 4-15, 4-16, **4-24**, 5-17, 6-3, A-48, A-49, A-50, A-51
 slope correction, 4-13, **A-48**
 species, 1-4, 1-6, 1-7, 2-7, 2-19, 2-20, 2-21, 3-8, 4-11, 4-14, 4-22, 4-25, **4-28**, 4-29, 4-35, 4-36, 4-41, 4-46, 5-12, 5-20, 5-23, 6-2, 6-3,

6-4, 6-9, 6-14, 6-15, 6-17, 6-21, 6-22, 6-23, 6-24, A-4, A-15, A-32, A-33, A-59, A-61, A-62, A-63, A-64, A-71, A-74, A-75, A-81, A-82, A-88, A-90, A-94, A-101, A-106, A-115, A-119, A-125, A-137, A-160, A-169, A-171
 standard deviation, 1-4, **1-7** A-6
 Standard Deviation, 1-7
 standard error, 1-6, **1-7**, **6-4**, 6-5, A-161
 strip line, **1-7**, **4-5**
 stump cruise, 4-12, **6-2**, 6-3, 6-4, 6-5, 6-8, 6-13, 6-21, **A-160**

T

TFL, 2-17, 4-39, 5-5, 5-7, **A-15**, A-16, A-17, A-18, A-19, A-20, A-21, A-22, A-23, A-24, A-25, A-26, A-131
 tie point, **1-8**, 4-2, 4-7, A-48
 timber licence, 2-15, 2-17
 timber merchantability specifications, 1-4, 1-5, 1-6, 4-10, 4-28, 5-12, 5-15, 6-2, A-6, A-75
 timber supply area, **1-8**, 3-4
 timber type, 1-6, **2-3**, 2-11, 2-12, 2-13, 2-15, 2-16, 2-18, 2-16, 2-20, **2-21**, 3-4, 3-8, 4-15, 4-18, 4-22, 5-14, 5-17, 5-20, 5-23, 5-24, 6-3, 6-4, 6-5, 6-7, 6-13, 6-14, A-2, A-6, **A-169**
 traverse, 1-3, **3-15**, 3-18, **4-2**, 4-5, 4-8, 6-3, 6-6, A-12, **A-13**
 tree class, 1-7, **1-8**, 2-16, 4-9, 4-11, 4-28, **4-34**, 4-37, 5-20, A-35, A-37, A-82
 tree height, 1-7, **4-24**, 4-27, 4-32, 6-5, 6-9, 6-17, A-40
 True North, **1-3**, 2-9, **A-172**, A-173
 type. *See* timber type

U

unsafe to cruise. *See* safety

V

variable plot sampling, **1-8**, **2-18**, **A-4**, **A-5**

W

walkthrough method, **4-18**, 4-19, 4-20, 4-21

This page is intentionally left blank.