

2022 B.C. BEST PRACTICES METHODOLOGY FOR QUANTIFYING GREENHOUSE GAS EMISSIONS

FOR PUBLIC SECTOR ORGANIZATIONS, LOCAL
GOVERNMENTS, MODERN TREATY NATIONS AND
COMMUNITY EMISSIONS



Ministry of
Environment and
Climate Change Strategy

B.C. Ministry of Environment and Climate Change Strategy
Victoria, B.C.
January 2023

Table of Contents

1	INTRODUCTION	1
1.1	Users/Audience	2
1.1.1	Public Sector Organizations (PSOs)	2
1.1.2	Local Governments and Modern Treaty Nations	2
1.1.3	Other Users	4
1.2	Global Warming Potential and Emissions Calculations	4
1.3	Principles for Determining Emission Factors	5
1.4	Scope of Reporting	6
2	STATIONARY SOURCES – BUILDINGS.....	7
2.1	Stationary Fuel Combustion.....	7
2.1.1	Sample Calculation	10
2.2	Stationary Space Conditioning and Refrigeration	11
2.2.1	How to Treat Small Emissions.....	11
2.3	Purchased Electricity.....	13
2.3.1	Renewable energy certificates (RECs)	14
2.4	District Energy Systems, Purchased Steam, Hot Water, etc. for Stationary Sources	14
2.4.1	Energy sold.....	15
2.5	Estimating a Building’s Energy Use	15
2.5.1	Regional Calculated Energy Intensity Unit (Regional Calc EIU).....	16
2.5.2	Fixed Energy Intensity Unit (Fixed EIU).....	18
3	MOBILE SOURCES – TRANSPORTATION	19
3.1	Mobile Fuel Combustion	19
3.2	Mobile Air Conditioning	22
4	OFFICE PAPER	23
5	BUSINESS TRAVEL	24
5.1	iExpenses Data	24
5.1.1	iExpenses: Distance and Spend-based Methods	24
5.2	Other Accounting System Data	26
6	BUSINESS TRAVEL – DISTANCE AND SPEND-BASED	27
6.1	Car, Truck, or SUV (Distance-based)	27
6.2	Ferry (Distance-based)	30
6.3	Air Transport (Distance-based)	32
6.3.1	Helicopter & Floatplane	32
6.3.2	Airplane.....	32
6.4	Air and Public Transport (Spend-based)	33
6.4.1	Taxi.....	35
6.4.2	Transit (City Bus, Skytrain, SeaBus).....	36
6.4.3	Weighted Average – Transit	39
6.4.4	Other Public Transport (Rail, Intercity Bus)	39
6.4.5	Weighted Average – Other Public Transport.....	40
6.5	Travel Vouchers	40
7	ACCOMMODATION	41

List of Tables

Table 1: Stationary Fuel Combustion.....	8
Table 2: Renewable Fuel Content in Fossil Fuels.....	8
Table 3: Sample Emissions Calculation.....	10
Table 4: Methods for Quantifying Fugitive Emissions.....	11
Table 5: Non-B.C. Purchased Electricity.....	13
Table 6: Regional Energy Intensity Unit Estimation Calculation.....	17
Table 7: Fixed Energy Intensity Unit Estimation Calculation.....	18
Table 8: Mobile Fuel Combustion.....	20
Table 9: Sample CO ₂ e Calculation.....	21
Table 10: Per Vehicle Estimate of HFCs from Mobile Air Conditioning.....	22
Table 11: iExpenses Business Travel Selections.....	25
Table 12: Non-iExpenses Business Travel Selections.....	26
Table 13: Average Fuel Efficiencies for Car, Truck, or SUV Travel.....	28
Table 14: Sample Emission Factor Calculation for Car Travel.....	29
Table 15: Emission Factors for BC Ferries Routes.....	30
Table 16: Emission Factor for Ferry Travel.....	31
Table 17: Distance-based Air and Public Transport.....	32
Table 18: Emission Factors for Spend-based Air Transport.....	34
Table 19: Emission Factors for Spend-based Ministry Directly-Paid Air Transport.....	34
Table 20: Emission Factors for Spend-based Public Transport.....	35
Table 21: Emission Factor for Accommodation.....	41
Table 22: Terms and Acronyms.....	42

1 Introduction

In May 2018, the Province of B.C. enacted legislation to establish provincial targets for reducing greenhouse gas (GHG) emissions by 40% below 2007 levels by 2030, 60% by 2040, and 80% by 2050.

Under the [Climate Change Accountability Act \(CCAA\)](#), the B.C. public sector must be carbon neutral in its operations for 2010 and every year thereafter.¹ Provincial public sector organizations (PSOs)² are required to report annually to confirm they have achieved carbon neutrality, in accordance with the CCAA and the [Carbon Neutral Government Regulation \(CNGR\)](#).

This document sets out the current best practices for quantifying and reporting GHG emissions from B.C.'s provincial public sector organizations, local governments, Modern Treaty Nations and other communities.

This document and its predecessors represent a catalogue of emissions factors and emissions calculation methodologies that draw heavily on protocols established by:

- The [World Resources Institute](#)
- The [Climate Registry](#)
- Published emission factors from authoritative sources such as:
 - [Environment and Climate Change Canada's \(ECCC\) National Inventory Report](#);
 - [Natural Resources Canada](#);
 - The [UK Department for Environment, Food and Rural Affairs](#).

This document also represents the consolidation of the previously stand-alone versions of PSO, Local Government (LG) and Community Energy and Emissions Inventory (CEEI) emissions methodology guides. It can be used by anyone using these other documents, or other groups who wish to calculate their corporate emissions. Please note that the private sector entities subject to the *B.C. Greenhouse Gas Emission Reporting Regulation* must use quantification methods prescribed by the Regulation.

Measuring GHG emissions is an important first step in reducing emissions and the activities/operations responsible for producing them, in support of meeting B.C.'s legislated GHG emission reduction targets under the CCAA.

This document provides a basis for PSOs to measure their GHG emissions with consistent and up-to-date best practices and provides comparable emissions reporting province wide.

¹ See http://www.bclaws.ca/civix/document/id/complete/statreg/07042_01, for the *Climate Change Accountability Act (CCAA)*, Bill 44 – 2007 and the *Carbon Neutral Government Regulation*, B.C. Reg. 392/2008. The legislation also requires core government business travel to be carbon neutral as of October 2007. This requirement does not apply to the broader provincial public sector.

² PSOs encompass Provincial government entities funded through the Consolidated Revenue Fund (e.g., ministries, special offices, and tribunals) and broader public sector agencies including health authorities, school districts, colleges and universities, and Crown corporations under the Government Reporting Entity.

1.1 Users/Audience

1.1.1 Public Sector Organizations (PSOs)

Public Sector Organizations are asked to direct all questions related to GHG quantification, scope and the Clean Government Report Tool (CGRT) to Carbon.Neutral@gov.bc.ca.

The CNGR defines the activities or emission sources that are “in scope” for the purposes of PSO emission reporting and offsetting. Since it was introduced in 2008, “in scope” activities/sources have been clarified through a series of policy decisions, which are summarized in the [Scope Summary Document](#).

The emissions factors and emissions calculation methodologies described in this document have been integrated into the CGRT, the online tool provided by the B.C. government to support PSO GHG measurement and reporting requirements.

Providing the CGRT centrally facilitates consistent reporting across all PSOs, enables quick updates, and provides analytical capabilities to assist organizations in analysing their emissions data.

CGRT contains emission factors for all PSO reporting categories. When PSOs report their annual energy consumption and activity data in the tool, CGRT applies the appropriate emission factor and global warming potential (see Section 1.2 below) and calculates total GHG emissions.

This document contains emission quantification information for the following in-scope PSO activities:

- Section 2: Stationary Sources: Buildings
- Section 3: Mobile Sources: Transportation
- Section 4: Office Paper

There are categories that apply to the Provincial Government (ministries and independent offices) only:

- Sections 5-7: Business Travel and Accommodation

For each activity category, the emission type is specified (either as direct or indirect emissions), and a brief description of the category is given, along with an explanation of data sources and where to locate emission factors. Where emission factors are not readily available from authoritative sources, an explanation is provided for how that emission factor was derived, including sample calculations.

1.1.2 Local Governments and Modern Treaty Nations

Almost every local government in B.C. has voluntarily signed the Climate Action Charter (CAC) committing to develop strategies and take actions to achieve the following goals:

- being carbon neutral in respect of their corporate operations;³
- measuring and reporting on their community’s GHG emissions profile; and

³Solid waste facilities regulated under the *Environmental Management Act* are not included in operations for the purposes of this Charter.

- creating complete, compact, more energy efficient rural and urban communities.

Under the CAC, the joint Provincial Government – Union of British Columbia Municipalities (UBCM) Green Communities Committee (GCC) was created to support local governments in planning and implementing climate initiatives.

To support local governments in meeting CAC commitments, the [Community Energy and Emissions Inventory](#) (CEEI) initiative provides a provincial framework for tracking and reporting energy and emissions at a community-wide scale. The Technical Methods and Guidance Document outlines the methodologies for producing GHG emissions estimates in the CEEI reports. Using common emission factors and referring to this document in the specific guidance material for the CEEI program will promote consistency between community-wide and corporate emissions reporting.

Modern Treaty Nations

The Province's relationship with Modern Treaty Nations in B.C is distinct and unique. Modern treaties set out constitutionally protected rights and obligations of the parties. The Province's work with Modern Treaty Nations to fully implement these treaties occurs both with individual Nations and collectively through the Alliance of B.C Modern Treaty Nations.

Measuring and reporting emissions

Local governments and Modern Treaty Nations are eligible for the Local Government Climate Action Program (LGCAP). Although measuring and reporting corporate GHG emissions is not mandatory for the first year of the program, it will be an eligibility requirement for LGCAP funding beginning in the second year of the program.

The boundaries for calculating emissions are based on the energy used in the delivery of traditional local government and Modern Treaty Nation services:⁴

- Administration and Governance;
- Drinking Water, Stormwater and Wastewater;
- Solid Waste Collection, Transportation and Diversion;
- Roads and Traffic Operations;
- Arts, Recreational and Cultural Services; and
- Fire Protection.

To ensure alignment, comparability and consistency in GHG quantification approaches, the GCC recommends aligning with the same methodologies that are utilized by PSOs in this document. To ensure methodology, emission factors and outputs from individual tools are consistent and comparable, a local government or Modern Treaty Nation will be required to meet the following standards for their measurement processes:

- Use the same corporate boundaries as defined in the [Carbon Neutral Workbook](#);

⁴ Within the traditional service sectors not all emissions will be captured. Any emissions related to the operation and maintenance of traditional services are

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

- Use the GHG measurement methods and emission factors in this guide, and updates as provided by the Climate Action Secretariat;
- Complete and adhere to the [Self Certification Business Process Checklist, and](#)
- Report on annual total corporate emissions as calculated by a GHG inventory tool (via an [Energy Consumption Summary Reporting Template](#)).

All the supporting materials for these standards are available on the [Climate Action Toolkit website](#).

By understanding and applying the information contained in this methodology document and completing the *Self Certified Business Process Checklist* available at [BC Climate Action Toolkit](#), local governments and Modern Treaty Nations can be assured that their GHG emissions inventories are accurate and consistent across B.C.

The following sections of this document apply directly to local governments and Modern Treaty Nations for their in-scope activities:

- Section 2: Stationary Sources - Buildings (**except** for Stationary Space Conditioning and Refrigeration)
- Section 3: Mobile Sources – Transportation (**except for** Mobile Air Conditioning)
- Annex 1 – Glossary of Terms and Acronyms, Global Warming Potentials, Selected References, Document Version Control

For each activity category, a brief description is given along with an explanation of data sources and emission factor calculations. Note emissions from office paper and business travel are not in scope for local governments and Modern Treaty Nations.

All local government and Modern Treaty Nation questions related to GHG quantification and scope should be directed to LGCAP@gov.bc.ca.

1.1.3 Other Users

Other potential users of this document include energy and emissions modelling and planning consultants, energy utilities, academic researchers and non-governmental organizations.

1.2 Global Warming Potential and Emissions Calculations

GHGs vary in their ability to trap heat in the atmosphere (radiative forcing).⁵ “Global warming potential” (GWP) is a measure of this ability. The GWP of a GHG accounts for both the immediate radiative forcing due to an increase in the concentration of the gas in the atmosphere and the lifetime of the gas. The GWP for each GHG is expressed as the ratio of its heat trapping ability relative to that for carbon dioxide (CO₂). Updates to B.C.’s GWPs specified in the CNGR were made in line with updates by the United Nations Framework Convention on Climate Change and the Canadian Federal Government to GWPs approved by the Intergovernmental Panel on Climate Change’s (IPCC’s) 5th Assessment Report.

⁵ The term “radiative forcing” refers to the amount of heat-trapping potential for a GHG and is measured in units of power per unit of area (watts per metre squared).

For example, the GWP of CO₂ equals one. Methane (CH₄) has a GWP of 28, indicating that its radiative forcing is 28 times that of CO₂. In other words, releasing one tonne of CH₄ will have the same warming impact as releasing 28 tonnes of CO₂ over a 100-year time horizon. This impact is often expressed using the concept of carbon dioxide equivalent, or CO₂e: that is, one tonne of CH₄ can also be expressed as 28 tonnes of CO₂e.

See [Annex 2](#) for a complete list of GWPs for all gases covered by the *Carbon Neutral Government Regulation (CNGR)*⁶ under the *Climate Change Accountability Act (CCAA)* (formerly the *Greenhouse Gas Reductions Targets Act (GGRTA)*).

For the 2022 reporting year, the GWPs in this document were updated to reflect IPCC's 5th Assessment Report.

GWPs are particularly important within the context of emissions reporting since international protocols require the reporting of both individual GHGs and their carbon dioxide equivalents (CO₂e). For this reason, the calculation of GHG emissions generally involves:

- (1) multiplying the emission factor for a GHG by an appropriate measure of consumption (activity) to produce the corresponding emissions for that GHG, and then
- (2) multiplying those emissions by its GWP to produce the corresponding CO₂e emissions.

The primary source document for emission factors is Environment and Climate Change Canada's (ECCC) *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019* (NIR), released in 2021.⁷ International documents, such as the Climate Registry's *General Reporting Protocol*, have been used for some emission factors.⁸ B.C.-specific emission factors have been developed in other cases, using data provided by B.C. energy companies and business travel providers.

The emission factors reported in this document represent the B.C. government's current understanding of the factors appropriate for emission sources and fuel types. The factors themselves and other key inputs (e.g., energy conversion factors, GWPs) will be updated as GHG measurement methodologies and data sources evolve.

1.3 Principles for Determining Emission Factors

The following principles guided the development of the [GHG emission factors](#) and estimation methods found in this document:

- 1) If information is available, the preference is to use emission factors that best reflect an organization's individual circumstances; for example, the particular source of electricity or

⁶ Carbon Neutral Government Regulation. (Dec. 9, 2008). Available:

https://www.bclaws.gov.bc.ca/civix/document/id/complete/statreg/392_2008#section4

⁷ Environment Canada. (2021). *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019*. The Canadian Government's Submission to the United Nations Framework Convention on Climate Change.

Available: <https://unfccc.int/documents/271493>

⁸ The Climate Registry. (2019). *General Reporting Protocol, Version 3.0*. B.C. is a member of the Climate Registry, which is a cross-border initiative to develop common measurement, verification, and reporting requirements for GHG emissions. Available: www.theclimateregistry.org.

fuel. Over time, the B.C. Government will continue to develop and apply B.C.-specific emission factors to improve the accuracy of GHG tracking.

- 2) Where B.C.-specific information is not available, standardized emission factors from national and international data sources are used. Factors are taken from ECCC's National Inventory Report and other recognized sources.
- 3) Measurement and reporting requirements should not be overly burdensome or costly. Therefore, in certain cases, such as where an emissions source is too small to justify additional data gathering by an organization, simplified methods for estimating emissions are provided.
- 4) In developing simplified estimation methods, upper bound assumptions are used in accordance with the principle of conservativeness to support an overestimation, rather than an underestimation of emissions.

1.4 Scope of Reporting

Emission factors are expressed in kilograms (kg) or metric tonnes (t) of GHG emissions per unit of consumption activity. Typically, the factors for a given category of activity – for example, building energy or fleet fuel consumption – are expressed in common units to enable comparison across different fuel types, travel modes, etc.

The CNGR lists six distinct GHGs or categories of GHGs:

- ◆ carbon dioxide (CO₂),
- ◆ methane (CH₄),
- ◆ nitrous oxide (N₂O),
- ◆ hydrofluorocarbons (HFCs),
- ◆ sulphur hexafluoride (SF₆), and
- ◆ perfluorocarbons (PFCs).

For most organizations, the primary GHGs emitted in significant amounts are the three principal gases associated with fuel combustion for energy (CO₂, CH₄, and N₂O) and, to a much lesser extent, HFCs released from refrigeration and air conditioning equipment.⁹

In the case of liquid fossil fuel blends with biofuel (e.g., ethanol, biodiesel), gasoline or diesel are combined with varying proportions of biofuels (e.g., E10, B5, B20), resulting in emission factors that are weighted averages of the biofuel and fossil fuel factors. However, since international protocols require the separate reporting of biogenic emissions from combustion (see Table 9 in [Section 3.1](#)), the CO₂ emissions from the biofuel component (Bio CO₂) must be calculated and reported separately from those of the fossil fuel component.

Wherever possible, emission factors are specified by individual gases. In certain instances, an aggregate factor for multiple gases is provided in kg or t of carbon dioxide equivalent (CO₂e) emissions. CO₂e is the standard unit for measuring and comparing emissions across GHGs of varying potency in the atmosphere (as seen in [Section 1.2](#)).

⁹ In British Columbia, PFCs and SF₆ are produced primarily in aluminum and magnesium smelting/processing and semi-conductor manufacturing. SF₆ is also used as a cover gas in electricity transmission equipment.

2 Stationary Sources – Buildings

The following section outlines the direct and indirect GHG emissions that are produced from activities associated with the lighting, heating, and cooling of facilities and the powering of machinery and equipment within those facilities.¹⁰

2.1 Stationary Fuel Combustion

Type: Direct Emissions

Description: A variety of fossil fuels may be combusted to produce heat and power including:

- ◆ natural gas,
- ◆ propane,
- ◆ light fuel oil (No. 2 heating oil),
- ◆ heavy fuel oil (No. 5 heating oil),
- ◆ kerosene,
- ◆ marine diesel,
- ◆ diesel fuel, and
- ◆ gasoline.

In addition to fossil fuels, wood fuel and wood waste may also be combusted to produce heat. To align emissions reporting under the Carbon Neutral Government Program with international protocols, biogenic emissions (Bio CO₂, CH₄, and N₂O) from biomass combustion including wood, wood waste, ethanol, biodiesel, and renewable natural gas must be reported.¹¹

For biomass combustion, Bio CO₂ emissions must be reported separately from CH₄ and N₂O emissions but PSOs are only required to offset the CH₄ and N₂O emissions from biomass combustion.¹²

In CGRT, stationary fuel consumption data is entered either in common units of energy usage (e.g., Gigajoules (GJ), kilowatt hours (kWh)) or are converted to GJ within CGRT.

Data sources: The standardized emission factors for stationary fuel combustion are drawn from the [1990-2019 NIR \(Part 2\)](#) as follows:¹³

¹⁰ See http://www.bclaws.ca/Recon/document/ID/freeside/392_2008 for the *Carbon Neutral Government Regulation*, B.C. Reg. 392/2008.

¹¹ The CO₂ released to the atmosphere during combustion of biomass is assumed to be the same quantity that had been absorbed from the atmosphere during plant growth. Since CO₂ absorption from plant growth and the emissions from combustion occur within a relatively short timeframe of one another (typically 100-200 years), there is no long-term change in atmospheric CO₂ levels. For this reason, biomass is often considered “carbon-neutral”, and the Intergovernmental Panel on Climate Change *Guidelines for National Greenhouse Gas Inventories* specifies the separate reporting of CO₂ emissions from biomass combustion. See: IPCC (2006), *2006 IPCC Guidelines for National Greenhouse Gas Inventories*, p. 5.5; and the Climate Registry (2019), *General Reporting Protocol Version 3.0*, p. B-4.

¹² Based on current international standards, B.C. already reports the CH₄ and N₂O portions of biomass combustion as line items in the Provincial Inventory Report. Bio CO₂ biomass emissions are currently reported as memo items.

¹³ Environment Canada. (2021). *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019*, Part 2. Available: <https://publications.gc.ca/site/eng/9.506002/publication.html>

Table 1: Stationary Fuel Combustion

Fuel Type	Table	Source
Natural Gas	A6.1-1 (CO ₂)	B.C. – Marketable
	A6.1-3 (CH ₄ , N ₂ O)	Residential, Construction, Commercial/Institutional, Agriculture
Propane	A6.1-4	All Other Uses
Light Fuel Oil	A6.1-5	Forestry, Construction, Public Administration and Commercial/Institutional
Heavy Fuel Oil	A6.1-5	Residential, Forestry, Construction, Public Administration and Commercial/Institutional
Kerosene	A6.1-5	Forestry, Construction, Public Administration and Commercial/Institutional
Diesel Fuel	A6.1-5	Refineries and Others
Marine Diesel	A6.1-14	Marine – Diesel
Gasoline	A6.1-14	Off-road Gasoline 4-stroke
Wood Fuel – Industrial (50% moisture)	A6.6-1	Wood Fuel/Wood Waste – Industrial Combustion
Wood Fuel – Residential (0% moisture)	A6.6-1	Conventional Stoves – Residential Combustion
Ethanol	A6.1-14	Renewable Fuels
Biodiesel	A6.1-14	Renewable Fuels

Energy conversion factors to convert to GJ from cubic metres of natural gas and litres of liquid fuels are drawn from Statistics Canada’s [Report on Energy Supply and Demand in Canada](#) (RESO).¹⁴

Calculations: In B.C., the [Renewable and Low Carbon Fuel Requirements Regulation \(RLCFRR\)](#) sets the requirements for renewable fuel in the province’s transportation and heating fuel blends.¹⁵ Effective January 1st, 2011, fuel suppliers were required to incorporate 5% renewable fuel content for gasoline and 4% for diesel. In CGRT, for any given volume of reported gasoline consumption, 95% of the fuel is deemed to be fossil fuel gasoline and the remaining 5% is ethanol. For diesel, 96% is fossil fuel diesel and 4% is biodiesel.

Table 2: Renewable Fuel Content in Fossil Fuels

Gasoline	Diesel
95% gasoline	96% diesel
5% ethanol	4% biodiesel

¹⁴ Statistics Canada (2021). *Report on Energy Supply and Demand in Canada 2018*, p. 130. Available: <https://www150.statcan.gc.ca/n1/en/catalogue/57-003-X>

¹⁵ See http://www.bclaws.ca/EPLibraries/bclaws_new/document/ID/freeside/394_2008 for the *Renewable and Low Carbon Fuel Requirements Regulation*, B.C. Reg. 394/2008.

Additionally, FortisBC offers a renewable natural gas product for its customers. Eligible customers have the option of purchasing a portion of their natural gas usage as renewable natural gas by paying the higher commodity cost. Note that if an organization captures their own biogas for stationary combustion, they should calculate the percentage of pure methane in the biogas and then apply the renewable natural gas emissions factors accordingly.

2.1.1 Sample Calculation

Table 3 provides a sample application of an emission factor to calculate GHG emissions based on 100 litres of propane consumption in buildings.

Table 3: Sample Emissions Calculation

Step	Formula	Calculation		
1. Convert the actual consumption to a common unit of measurement.	Actual Consumption (L)	100 L		
	x	X		
	Energy Conversion Factor (GJ/L)	0.02531 GJ/ L		
	=	=		
	Converted Fuel Consumption (GJ)	2.531 GJ		
2. Calculate the emissions of each GHG using the appropriate emission factor.	Converted Fuel Consumption (GJ)	CO₂	CH₄	N₂O
	x	2.531 GJ	2.531 GJ	2.531 GJ
	Emission Factor by GHG (kg/GJ)	59.86 kg CO₂ /GJ	.0009 kg CH₄ /GJ	0.0043 kg N₂O /GJ
	=	=	=	=
	Emissions by GHG	151.5 kg CO₂	0.0023 kg CH₄	0.0109 kg N₂O
3. Convert the emissions of each GHG to CO ₂ equivalency (CO ₂ e) using the appropriate Global Warming Potential.	Emissions by GHG	CO₂	CH₄	N₂O
	x	151.5 kg CO₂	0.0023 kg CH₄	0.0109 kg N₂O
	GWP	1	28	265
	=	=	=	=
	Emissions (kg CO ₂ e)	151.5 kg CO₂e	0.0644 kg CO₂e	2.888 kg CO₂e
4. Sum across the gases to calculate total CO ₂ e emissions.	CO₂ + CH₄ + N₂O (all in kg CO₂e)	151.5 kg CO₂e + 0.0644 kg CO₂e + 2.888 kg CO₂e		
	=	=		
	Total CO₂e	154.45kg CO₂e		
5. Convert total emissions from kg to tonnes for reporting purposes and round to significant figures.	Emissions in kg CO ₂ e/1 000 kg/t	154.45 kg CO₂e /1 000 kg/t		
	=	=		
	Emissions in tonnes CO ₂ e	0.154 t CO₂e		

2.2 Stationary Space Conditioning and Refrigeration

Type: Direct Fugitive Emissions

Description: Fugitive refrigerant emissions from stationary space conditioning equipment are attributed to the leakage and loss of HFC and PFC-based refrigerants from space conditioning and commercial-type refrigeration systems. Refrigerant loss can occur during the manufacturing, operation, maintenance, and disposal of such equipment.

Data sources: The [Climate Registry’s General Reporting Protocol](#) offers three methods for reporting and/or estimating emissions from stationary air conditioning and refrigeration.¹⁶

1. The “Advanced Mass Balance” method is provided for organizations that have access to detailed data on refrigerant purchases, sales, storage, and changes in total equipment capacity.
2. The “Simplified Mass Balance” method is available for organizations that have access to the amount of refrigerant purchased for new and existing equipment, as well as the amount of refrigerant disposed of, recovered, and recycled.
3. The “Screening Method” is used to estimate fugitive emission releases from HFC and PFC refrigerants when detailed information is not available and all small emissions sources are less than 10% of total emissions.¹⁷

Calculations: Emissions from stationary space conditioning and refrigeration for the B.C. Government were calculated using both the “Simplified Mass Balance” and “Screening Method” using HVAC incident report log and equipment inventory information.

Table 4: Methods for Quantifying Fugitive Emissions

Reference	Method	Source
The Climate Registry (2019), General Reporting Protocol Version 3.0	Simplified Mass Balance	C-18
	Screening Method	C-19

2.2.1 How to Treat Small Emissions

For many organizations, dealing with small emissions sources can be challenging. For PSOs, if an emissions source is onerous to collect *and* is expected to comprise less than 1% of the organization’s total emissions inventory, it is considered out of scope. The decision tree below was developed to help PSOs determine whether a certain source of emissions falls under this rule. Other methods to address small emission sources are outlined in the General Reporting Protocol. If an emissions source is considered out of scope after using the decision tree, the source of the emission and the rationale for its exemption should be included as a part of a PSO’s self-certification documentation and annual reporting.

¹⁶ The Climate Registry (2019). *General Reporting Protocol Version 3.0*, C-17. Available: <https://www.theclimateregistry.org/protocols/General-Reporting-ProtocolV3.pdf>.

¹⁷ *Ibid.*, C-3.

2.3 Purchased Electricity

Type: Indirect Emissions

Description: The Ministry of Environment and Climate Change Strategy annually publishes electricity emission intensity factors (EEIFs) for grid-connected entities¹⁸. The published factors are used by grid-connected entities to quantify the GHG emissions of electricity which is not self-generated. Electricity in B.C. is supplied to customers through the Integrated grid (southern and western B.C.), the Fort Nelson grid (northeast B.C.), and through community generating stations for isolated grid communities (throughout B.C.).¹⁹

Data sources: Emission factors for purchased electricity in B.C. are published by the director under the [Greenhouse Gas Industrial Reporting and Control Act \(GGIRCA\)](#). GGIRCA electricity emissions factors are updated annually.

Emissions from PSO buildings located in provinces other than B.C. must be measured and reported using emission factors for those provinces. Those emission factors are drawn from the [1990-2019 NIR \(Part 3\)](#) under “Generation Intensity”:²⁰

Table 5: Non-B.C. Purchased Electricity

Utility Provider	Source
Alberta	Table A13-10
Ontario	Table A13-7
Quebec	Table A13-6
Nova Scotia	Table A13-4

Calculations: The methodology for determining B.C. electricity emission intensity factors is set in Schedule D of the [Greenhouse Gas Emission Reporting Regulation \(GGERR\)](#). Emission factors for PSO buildings located in other provinces (listed in Table 5) were calculated using a three-year average of generation intensities (2017-2019). Emission factors for PSO buildings located in other countries such as the U.K., India, Japan, China, and Hong Kong are based on data from the International Energy Agency (IEA) for CO₂ emissions per kWh from electricity and heat generation.²¹ The published three-year rolling averages (2012-2014) for individual countries were incorporated into this report.

¹⁸ B.C. Ministry of Environment and Climate Change Strategy. Electricity Emission Intensity Factors for Grid-Connected Entities. Available: <https://www2.gov.bc.ca/gov/content/environment/climate-change/industry/reporting/quantify/electricity>

¹⁹ B.C. Ministry of Environment and Climate Change Strategy. *Frequently Asked Questions: Electricity Emission Intensity Factors for Grid-Connected Entities*. Available: https://www2.gov.bc.ca/assets/gov/environment/climate-change/ind/quantification/electricity_emission_intensity_factors_for_grid-connected_entities_faq.pdf

²⁰ Environment Canada (2021). *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019*, Part 3, p. 58. Available: <https://publications.gc.ca/site/eng/9.506002/publication.html>

²¹ International Energy Agency. (2022). Available: <http://www.iea.org/>

2.3.1 Renewable energy certificates (RECs)

The CCAA does not recognize Renewable Energy Certificates (RECs), Green Rights or Green Power from Green Power suppliers as a means of offsetting emissions for PSOs to meet their carbon neutral government obligations.

2.4 District Energy Systems, Purchased Steam, Hot Water, etc. for Stationary Sources

Type: Indirect Emissions

Description: Several organizations use centralized steam or hot water systems to heat buildings. Some (e.g., Vancouver Coastal Health Authority) produce heat, use a portion for their own consumption, and sell the surplus. Others purchase heating and/or cooling from a commercial or municipal district energy utility. These providers meet the definition of a District Energy System: “An underground infrastructure asset where thermal energy is provided to multiple buildings from a central energy plant or plants. Steam or hot water produced at the plant is transmitted interminably through highly insulated underground thermal piping networks. The thermal energy is transferred to the building’s heating system, avoiding the need for boilers in individual buildings.”²²

This thermal energy can be created using a variety of input feedstock fuels including biomass (forest, agricultural, municipal solid waste), biogas, renewable energy (e.g., solar and wind), natural gas, recovered waste heat, and cool water. As such, it provides the opportunity to utilize locally available energy to provide space conditioning and hot water at a community scale and, importantly, the opportunity to centrally substitute feedstock fuels over time. This is an important way for communities to create sustainable, resilient energy delivery systems and manage the risk of dependence on only one fuel or technology.

When an organization produces heating or cooling for its own consumption, the resulting GHG emissions are determined by applying the appropriate emission factors of the fuels consumed by the system (refer to [Section 2.1](#)). Where an organization purchases heating or cooling from another entity, estimating emissions requires information on the fuels consumed and the generation, distribution, and system efficiencies.

Data sources: The average efficiency of district energy systems can vary significantly depending on characteristics such as the age of the plant, distribution losses, and operation and maintenance practices. A [District Energy emissions calculator](#) based on the General Reporting Protocol has been developed for organizations to help them determine which of the tiers they should use for emissions measurement and reporting purposes.²³ The calculator can also be found on the [Carbon Neutral Government Program Requirements page](#) under “Links and Tools”.

- ◆ **STEP 1:** Use the calculator to determine the district energy system’s emissions intensity.
- ◆ **STEP 2:** Compare the calculated emissions intensity with the thresholds provided in the calculator.

²² See the International District Energy Association’s (2019) definition at:

<https://www.districtenergy.org/topics/district-heating>

²³ The Climate Registry (2019). *General Reporting Protocol, Version 3.0*. Available:

<https://www.theclimateregistry.org/protocols/General-Reporting-ProtocolV3.pdf>

- ◆ **STEP 3:** Select the tier where the calculated value falls by referencing the upper and lower thresholds.

As there is no upper bound to Tier 10, CGRT calculates emissions based on the lower-bound of each tier to provide consistent conservative estimates across all tiers.

Organizations can continue loading their purchased steam in pounds (lbs) or kilograms (kg) into CGRT for conversion into megajoules (MJ) of energy. Note the previous tiered steam emission factors for steam (Natural Gas at 65%, 75%, and 85%) from previous iterations of the *BC Best Practices Methodology for Quantifying Greenhouse Gas Emissions* document have been carried over into the new tiers in CGRT. Statistics Canada provides an average conversion factor for translating kg of steam into MJ of energy.²⁴

Organizations should document all the variables they input into the calculator as a record for reference by other/future staff, for annual Self Certification purposes, and for possible third-party verification. This documentation should be updated on an annual basis as system efficiencies will vary based on local climate, exposure, occupancy patterns, heating controls, insulation, and other factors. Documentation, or any questions about the foregoing, should be sent to Carbon.Neutral@gov.bc.ca.

2.4.1 Energy sold

Where a PSO produces heating/cooling energy and sells a portion to another PSO, the producing PSO must account for that quantity of energy sold as a negative value, or separately identify the emissions from the sales using the District Energy calculator. These emissions are then deducted from the producer's GHG inventory to avoid double counting when aggregating emissions across the B.C. public sector.

If an organization produces heating/cooling energy and sells a portion to another organization that is not a PSO, they must report in full the emissions resulting from the production and distribution of that energy.


2.5 Estimating a Building's Energy Use

The following information is intended to provide a summary of two methods to estimate energy consumption when such data is not readily available.

These methods rely on a building's Gross Floor Area; the total area, as measured between the principal exterior surfaces of the enclosing fixed walls of the building(s). This includes *all areas* inside the building(s) such as: occupied tenant areas, common areas, stairwells, meeting areas, break rooms,

²⁴ Statistics Canada (2021). *Report on Energy Supply and Demand in Canada 2018*, p. 131. Available: <https://www150.statcan.gc.ca/n1/en/catalogue/57-003-X>

restrooms, elevator shafts, mechanical equipment areas, and storage rooms.²⁵ The following flowchart demonstrates the process of choosing the best approach to estimating a building’s energy use.

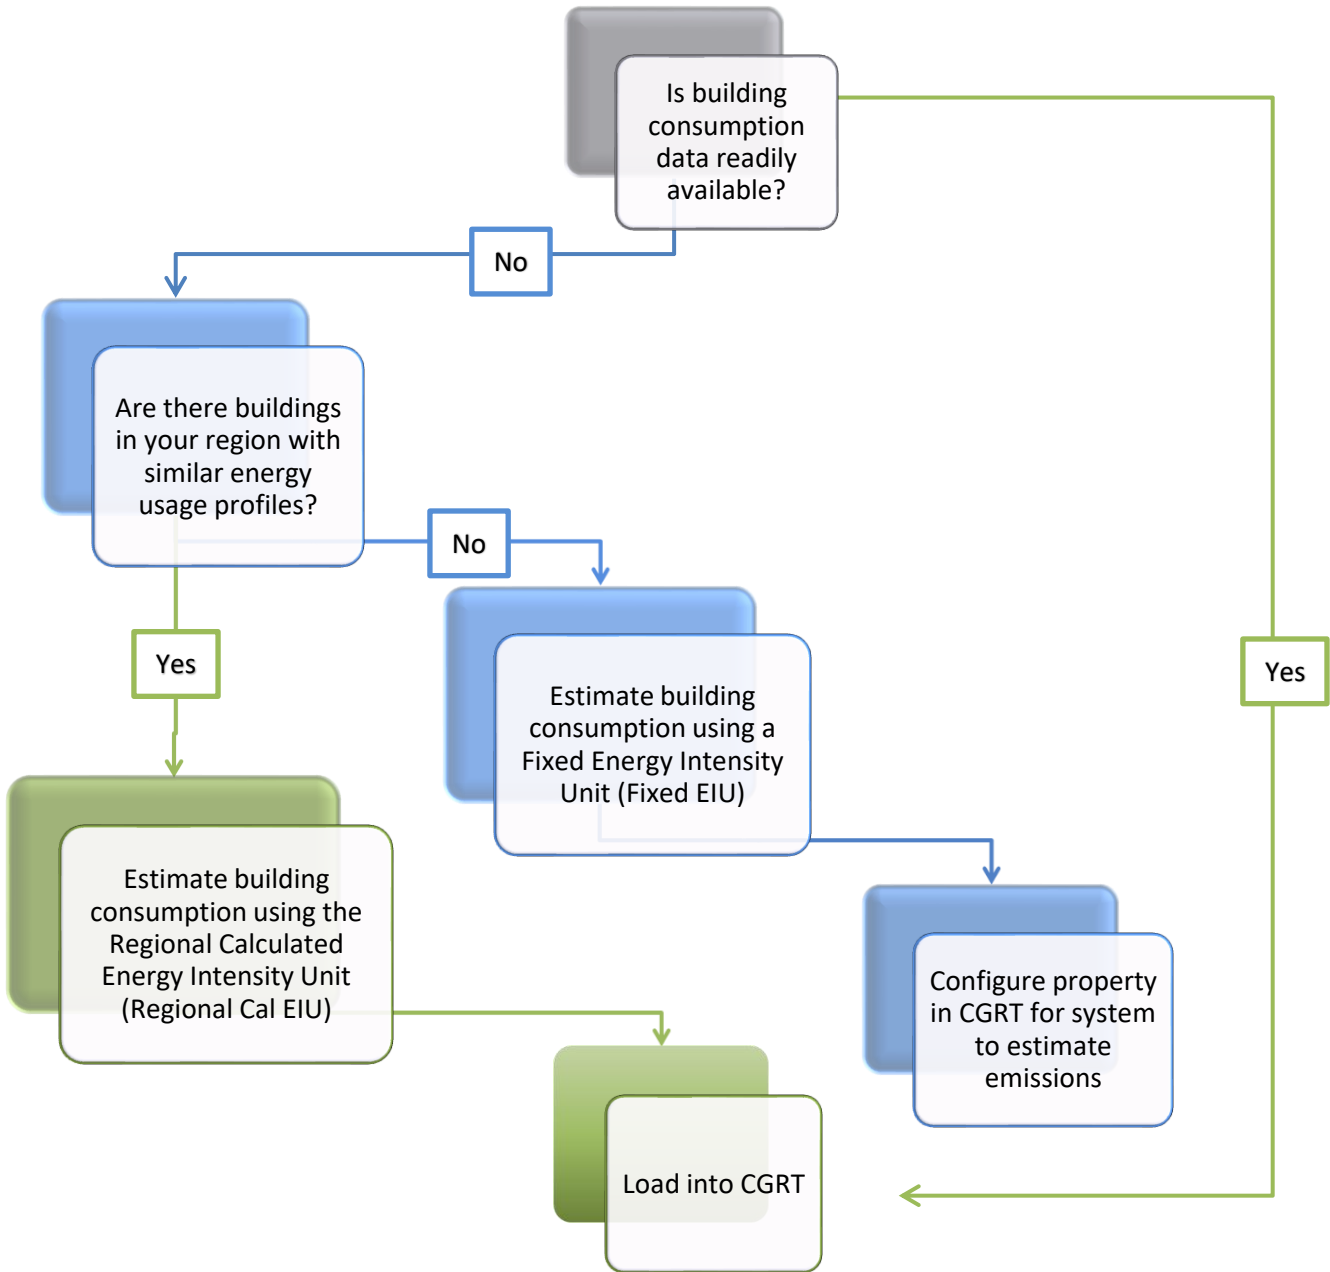

2.5.1 Regional Calculated Energy Intensity Unit (Regional Calc EIU)

This method allows an organization to estimate its energy use for a given building from data available for similar buildings in their portfolio within the same climatic region. For this approach to be reasonably accurate, energy data should be available for a sufficient proportion of a PSO’s buildings portfolio within the same climatic region. As guidance, it is suggested that energy data should be available for at least

²⁵ Energy Star Portfolio Manager. *Glossary*. Available: <https://portfoliomanager.energystar.gov/pm/glossary>

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

51% of a PSO's buildings in a particular category (e.g., educational facilities) and within the same climatic region. In addition, having at least 2 years of historical data is recommended to smooth out year-over-year variability.

Using available energy data from a PSO's buildings within a specific climatic region and classification, this approach involves calculating the energy use per square meter (i.e., energy intensity) and applying that energy intensity to the floor area of the similar buildings requiring estimates. Once consumption is estimated in this way, load that estimated consumption data into CGRT to determine the resulting emissions. The calculations below demonstrate how the estimated consumption data could be converted to emissions outside of CGRT by applying the appropriate emission factors and GWP to estimate related GHG emissions.

Table 6: Regional Energy Intensity Unit Estimation Calculation

Step	Formula for each energy type
1. For similar buildings (i.e., office/region) with data, determine their combined annual consumption for each energy type and divide by their combined floor area	$\frac{\text{Annual energy type use / Total square meters of related floor area}^a}{\text{Annual Regional Energy Intensity Factor (GJ/year/m}^2\text{)}}$
2. Estimate the quantity of each energy type used in the Building to be Estimated (BTBE)	$\text{Annual Regional Energy Intensity Factor (GJ/year/m}^2\text{)} \times \text{Floor area of the BTBE}$
3. Apply the emission factor by energy type to yield total emissions by energy type	$\text{Emission Factor (kg/GJ)} \times \text{Consumption (GJ)}$
4. Apply the global warming potentials to yield total emissions	$\text{Emissions by GHG (kg)} \times \text{GWP}$
5. Sum across the gases to calculate total CO ₂ e emissions	$\text{CO}_2 + \text{CH}_4 + \text{N}_2\text{O (all in kg CO}_2\text{e)}$
6. Convert total emissions from kg to tonnes for reporting purposes.	$\frac{\text{Emissions in kg CO}_2\text{e / 1,000 kg / t}}{\text{Emissions in tonnes CO}_2\text{e}}$

a. If the floor area of a building has changed within the reporting period, multiply each area by the number of days during the year for which it was effective. Sum the results and divide that sum by the total number of days in the year to get a prorated area to use for that year.

2.5.2 Fixed Energy Intensity Unit (Fixed EIU)

This estimation method applies energy intensity factors from the Comprehensive Energy Use Database (CEUD) published by Natural Resources Canada (NRCan) through the Office of Energy Efficiency.²⁶ This database includes statistics on energy use by province, building use, type, and energy type.

Table 7: Fixed Energy Intensity Unit Estimation Calculation

Step	Formula for each Energy type
	EIU (GJ/month/m ²)
1. For each energy type, determine the annual consumption amount.	$\begin{aligned} & \times \\ & \text{square meters of floor area}^a \\ & \times \\ & 12 \text{ months} \\ & = \\ & \text{annual consumption amount (GJ)} \end{aligned}$
2. Apply the emission factor by energy type to yield total emissions by energy type	$\begin{aligned} & \text{Emission Factor (kg/GJ)} \\ & \times \\ & \text{Consumption (GJ)} \\ & = \\ & \text{Emissions by GHG (kg)} \end{aligned}$
3. Apply the global warming potentials to yield total emissions	$\begin{aligned} & \text{Emissions by GHG (kg)} \\ & \times \\ & \text{GWP} \\ & = \\ & \text{Emissions (kg CO}_2\text{e)} \end{aligned}$
4. Sum across the gases to calculate total CO ₂ e emissions	$\begin{aligned} & \text{CO}_2 + \text{CH}_4 + \text{N}_2\text{O (all in kg CO}_2\text{e)} \\ & = \\ & \text{Total CO}_2\text{e} \end{aligned}$
5. Convert total emissions from kg to tonnes for reporting purposes.	$\begin{aligned} & \text{Emissions in kg CO}_2\text{e}/1,000 \text{ kg/t} \\ & = \\ & \text{Emissions in tonnes CO}_2\text{e} \end{aligned}$

a. If the area of a building has changed within a monthly reporting period, multiply each area by the number of days during the month for which it was effective. Sum the results and divide that sum by the total number of days in the month to get a prorated area to use for that month.

2.5.3 Hybrid Energy Estimations

In some instances, energy data may be available for one energy type in a building but not for another. It is appropriate then to estimate the unknown energy type using one of the methods above. Similarly, the regional calculation may be used to estimate one energy type within a building while other energy types in the same building may use the Fixed EIU.

²⁶ Natural Resources Canada (NRCan) through the Office of Energy Efficiency Comprehensive Energy Use Database: https://oee.nrcan.gc.ca/corporate/statistics/neud/dpa/menus/trends/comprehensive_tables/list.cfm

3 Mobile Sources – Transportation

Transportation is another source of GHG emissions. Two categories of emissions are discussed in detail below:

- ◆ Direct emissions from fossil fuels combustion in vehicles and equipment.
- ◆ Direct fugitive emissions from mobile air conditioning systems.

3.1 Mobile Fuel Combustion

Type: Direct Emissions

Description: Emission factors are specified for seven transport modes:

- ◆ Light-duty vehicles (excluding trucks, SUVs, and minivans)
- ◆ Light-duty trucks (including SUVs and minivans)²⁷
- ◆ Heavy-duty
- ◆ Motorcycles
- ◆ Off-road vehicles and equipment (e.g., snowmobiles, ATVs, lawnmowers and trimmers, tractors, construction equipment)
- ◆ Marine
- ◆ Aviation

Eleven fuel types have different emission factors associated with them:

- ◆ Gasoline
- ◆ Diesel
- ◆ Biodiesel
- ◆ Ethanol
- ◆ Marine Gasoline
- ◆ Marine Diesel
- ◆ Aviation Gasoline
- ◆ Aviation Turbo Fuel
- ◆ Propane
- ◆ Natural Gas
- ◆ Electricity

²⁷ The NIR defines light-duty cars and trucks as those with a Gross Vehicle Weight Rating (GVWR) of 3,900 kg or less and heavy duty as those vehicles with a GVWR greater than 3,900 kg.

CGRT accepts fuel consumption data in litres by mode of transport and fuel type. This information is required because the emission factors for CH₄ and N₂O vary by vehicle type and transport mode.

Hybrid electric vehicles are not considered separately since their fuel consumption is captured under gasoline cars and trucks. The higher fuel economy of these vehicles relative to conventional gasoline cars and trucks is reflected in their lower overall fuel consumption, and therefore, lower GHG emissions. In the case of battery electric vehicles and plug-in hybrid electric vehicles, emissions are based on the emissions intensity of the grid electricity that charges the vehicle. The electricity consumed by these vehicles may be tracked as part of a building’s plug load or may be distinguished as mobile electricity. Hydrogen powered transit busses produce zero emissions at the tailpipe and are not included in emissions reporting for mobile sources

Data sources: The following table outlines emission factors for mobile fuel combustion from the [1990-2019 NIR \(Part 2\) Table A6.1-14](#).²⁸

Table 8: Mobile Fuel Combustion

Transport Mode	Fuel Type	Source
Light-duty Vehicle	Gasoline	Tier 2
	Diesel	Advanced Control
Light-duty Truck (includes SUV and Minivan)	Gasoline	Tier 2
	Diesel	Advanced Control
Heavy-duty	Gasoline	Three-way Catalyst
	Diesel	Advanced Control
Motorcycle	Gasoline	Non-catalytic Controlled
Off-Road (Vehicle/Equipment)	Gasoline	Off-road Gasoline 4-stroke
	Diesel	Off-road Diesel ≥ 19kW, Tier 4
Marine	Gasoline	Marine
	Diesel	
Aviation	Gasoline	Aviation
	Turbo Fuel	
Various	Biodiesel	Renewable Fuels
	Ethanol	

Note: Accepted units in CGRT for the above emission factors are in kg/L.

²⁸ Environment Canada (2021). *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019*, Part 2, p. 217. Available: <https://publications.gc.ca/site/eng/9.506002/publication.html>

Calculations: In practice, biofuels are blended with fossil fuels, specifically gasoline or diesel, in varying proportions (e.g., E10, B5, B20), so that the actual emission factor is a weighted average of the biofuel and fossil fuel factors.²⁹ The following equation can be used to calculate the Bio CO₂ portion of fleet fuels.

$$\text{Equation:} \quad \begin{array}{l} \text{Renewable Fuel} \\ \text{(Ethanol or} \\ \text{Biodiesel)} \end{array} \times \begin{array}{l} \text{Biofuel Proportion} \\ \text{(4\%, 5\%, 10\%, 15\%,} \\ \text{20\%)} \end{array} = \text{Bio CO}_2$$

Below are examples of how to calculate the Bio CO₂ portions of a standard light-duty gasoline and light-duty diesel vehicle. Values for renewable fuels are derived from Table 1.

$$\begin{array}{l} \text{Light-duty} \\ \text{Vehicle –} \\ \text{Gasoline (E5):} \end{array} \quad \begin{array}{l} 1.508 \text{ kg/L} \\ \text{(Ethanol)} \end{array} \times 5\% = \mathbf{0.0754 \text{ kg/L}}$$

$$\begin{array}{l} \text{Light-duty} \\ \text{Vehicle –} \\ \text{Diesel (B4):} \end{array} \quad \begin{array}{l} 2.472 \text{ kg/L} \\ \text{(Biodiesel)} \end{array} \times 4\% = \mathbf{0.09888 \text{ kg/L}}$$

Table 9: Sample CO₂e Calculation

(1)	(2)	(3)	(4)	(5)	(6)	(7)
Transport Mode	Fuel Type	Emission Factor (kg/L) ^a				
		Bio CO ₂	CO ₂	CH ₄	N ₂ O	CO ₂ e
Light-duty Vehicle	Gasoline (E5)	0.0754	2.291	0.00014	0.00022	2.201
	Diesel (B4)	0.09888	2.57328	0.00005	0.00022	2.633

^a Emission factors in columns (4) through (6) are those listed in Table 8.

²⁹ International protocols require the separate reporting of biogenic emissions from fossil fuel-based emissions (see [Section 2.1](#)), the CO₂ emissions from the biofuel component must be calculated and reported separately from those of the fossil fuel component.

3.2 Mobile Air Conditioning

Type: Direct Fugitive Emissions

Description: Atmospheric releases of motor vehicle coolants such as hydrofluorocarbons (HFCs) occur throughout the lifecycle of motor vehicle air conditioning (MVAC) units. Unlike a building’s heating, ventilation, and air conditioning (HVAC) systems, MVAC servicing is not part of the regular service schedule. Moreover, fuel consumption, which is measurable, does not provide insight into MVAC use. Given differences in climate, usage on the coast is likely to be very different from that in the interior.

Data sources: The Climate Registry offers a “Screening Method” for estimating emissions based on an upper bound capacity charge for MVAC equipment multiplied by an operating emission factor.³⁰ This method has been used to calculate a default emission factor, in kg of HFCs per vehicle. To apply the default factor, organizations must provide the number of vehicles in its fleet with MVAC.

The Climate Registry recommends an upper bound capacity charge of 2 kg and an operating emission factor of 20 percent of capacity per year for mobile air conditioning.³¹ The most common refrigerant used in MVAC is HFC-134A, with a global warming potential of 1,430.

Calculations: Multiplying the 2 kg capacity charge by the 20 percent operating emission factor and converting to CO₂e emissions yields a default emission factor of 572 kg CO₂e per vehicle per year.

Table 10: Per Vehicle Estimate of HFCs from Mobile Air Conditioning

Greenhouse Gas (kg)	Emissions per Vehicle per Year (kg CO ₂ e)
Hydrofluorocarbons	572

^a default emission factor for HFCs from mobile air conditioning are emissions which consist of HFC-134a.

Organizations typically have two options for calculating and reporting mobile cooling emissions. Organizations with information on the MVAC servicing for their fleets (e.g., for transit fleets) may use that data to report their HFC emissions directly using the Climate Registry’s “Simplified Mass Balance Approach.”³² This method requires information on the quantities of each refrigerant used and recovered from MVAC equipment reported directly. Organizations without access to detailed mobile refrigerant information may estimate and report their annual refrigerant use at 572 kg CO₂e per each vehicle with air conditioning. This value provides a conservative estimate of emissions resulting from HFC-134a use.

³⁰ The Climate Registry (2019). *General Reporting Protocol Version 3.0*, C-19. Available: <https://www.theclimateregistry.org/protocols/General-Reporting-ProtocolV3.pdf>

³¹ The Climate Registry (May 2021). *2021 Climate Registry Default Emission Factors*, Table 4.1, p. 67. Available: <https://www.theclimateregistry.org/wp-content/uploads/2021/05/2021-Default-Emission-Factor-Document.pdf>

³² Ibid., (2019). C-18.

4 Office Paper

Type: Indirect Emissions

Description: Emission factors for office paper are differentiated by size and the percentage of post-consumer recycled (PCR) content. In practice, the PCR content can range between 0 and 100 percent.³³

Three different sizes of office paper (any colour) are in scope – 8.5” x 11”, 8.5” x 14” and 11” x 17”. In each case, data on the number of 500-sheet (20lb) packages are entered into CGRT.

Some organizations may be using alternative paper types such as wheat, eucalyptus, sugarcane, bamboo, etc. While these papers likely have emission factors that differ from conventional paper, limited literature is currently available on their carbon intensity. As a best approximation, the emission factors in CGRT for 100% PCR of the corresponding paper size should be applied to these alternative paper types.

The Climate Action Secretariat is undertaking research on the relative merits of alternative types of paper, including their emissions intensities and environmental and social impacts. This research will inform potential future adjustments to methodology to support more accurate reporting of alternative paper types in future.

Data sources: Ideally, it would be best to specify emission factors that accurately reflect the extraction, transportation, manufacturing, and disposal processes for specific paper purchases. In the absence of paper-specific information, proxy emission factors have been derived from the Environmental Paper Network Paper Calculator.³⁴ This tool assesses the lifecycle impacts of paper production and disposal and is updated regularly with peer-reviewed data.

The Paper Calculator inputs the paper grade (e.g., copy paper), quantity by weight and PCR content and estimates the associated GHG emissions in pounds of CO₂e.

Calculations: To generate the emission factors in CGRT, the weight of a 500-sheet package was first determined for each paper size. This weight (in metric tonnes) and the PCR content were then entered into the Paper Calculator and the resulting estimate of GHG emissions was converted from lbs to kg CO₂e. Emission factors for other PCR contents (e.g., 85 percent) can be interpolated by averaging between the values shown.

It should be noted that, unlike the other emission factors within this document, the office paper entries in CGRT are lifecycle emission factors.³⁵

³³ See the Ecopaper Database at <http://c.environmentalpaper.org/home> for a listing of papers available in the Canadian marketplace and their PCR contents.

³⁴ Environmental Paper Network. (2021). *Paper Calculator 4.0*. Available: <http://c.environmentalpaper.org/home>

³⁵ Lifecycle emissions account for all emissions relating to the production, use, and disposal of a product, including the extraction of raw materials, product manufacturing, and intermediate transport steps.

SECTIONS 5-7 ARE APPLICABLE TO PROVINCIAL GOVERNMENT ONLY

5 Business Travel

Type: Indirect Emissions

Description: In accordance with the CCAA, the Provincial government (i.e. ministries, special offices, tribunals) is required to quantify, reduce, offset, and report the business travel and accommodation emissions of its public officials.

Quantification methods: The GHG Protocol provides three methods for quantifying business travel emissions listed below in order of preference.³⁶ The Protocol recommends the selection of a method based on availability of data:

1. **Fuel-based method:** involves determining the amount of fuel(s) consumed during business travel and applying the appropriate emission factor for the fuel(s)
2. **Distance-based method:** involves determining the distance and travel mode(s) and applying the emission factor appropriate for the mode(s)
3. **Spend-based method** involves determining the expenditures and travel mode(s) and applying the emission factors appropriate for the mode(s)

Data sources: Beginning with the 2016 reporting year, the business travel emissions of Provincial government were quantified using data collected through a combination of:

1. iExpenses (the system used to reimburse employees for out-of-pocket travel expenses); and
2. The government's accounting system which also tracks:
 - ministry directly paid expenditures on airfare, and
 - employee travel vouchers for travel on other modes.

These two data sources are described in Sections 5.1 and 5.2, respectively, below.

5.1 iExpenses Data

The B.C. Government's iExpenses system tracks travel mode(s), some fuel type(s), and some travel distance(s) in addition to related expenditures.

Calculations: Where travel distances are collected by iExpenses, business travel emissions can be quantified using the distance-based method. Otherwise, travel emissions must be calculated with the spend-based method. Table 11 below illustrates when each method is used with iExpenses data.

5.1.1 iExpenses: Distance and Spend-based Methods

Employees using iExpenses enter mandatory information about their business trips, including the type of expense they incurred (see column 2 in Table 11), the travel mode (column 3) and fuel used along with other details (column 4).

Total kilometres travelled are determined/captured by the system where employees travel by:

³⁶ Greenhouse Gas Protocol. Available: <https://ghgprotocol.org/>

- ◆ air or ferry on common routes,
- ◆ between common origin/destination combinations, and
- ◆ rental/personal vehicle.

The distance data in combination with mode and fuel type then enables the application of the distance-based method to quantify related emissions. However, not all iExpenses entries include the data points necessary for the distance-based method. Employees who travel by air or ferry on rarely used routes, or between small cities, are unable to select the specific locations from which they depart and arrive. In these situations, they select “Other” or “Other BC” and GHGs must be calculated using a spend-based method.

Column 6 of Table 11 indicates which section of the document provides more detail on the related estimation methods in Column 5.

Table 11: iExpenses Business Travel Selections

(1) Employee’s Travel Mode	(2) iExpenses “Expense Type” Selection	(3) iExpenses “Travel Mode” Selection	(4) Key iExpenses Dropdown Selection	(5) GHG Estimation Method	(6) Section w/ Detailed Description
Air Travel, common routes	Air You Paid	Helicopter, Airplane, Float Plane	Route	Distance- Based	6.3
Air Travel, Other routes	Air You Paid	Helicopter, Airplane, Float Plane	“Other” or “Other BC” as Route option	Spend- Based	6.4
All rental vehicles	Car Rental	Car, other, Truck/SUV	Fuel type, vehicle type	Distance- Based	6.1
Personal vehicle	Mileage	Car, other, Truck/SUV	Fuel type, vehicle	Distance- Based	6.1
Ferries	Ferry	N/A	Route	Distance- Based	6.2
Rail, Intercity Bus, other public transport	Public Transport	Other	N/A	Spend- Based	6.4
Taxis	Public Transport	Taxi	N/A	Spend- Based	6.4
City Bus, Skytrain, SeaBus	Public Transport	Transit	N/A	Spend- Based	6.4
Accommodation	Accommodation	Hotel, Private, Other	N/A	Nightly stay-based	7

5.2 Other Accounting System Data

In addition to iExpense tracking of employee out-of-pocket travel expenses, employee travel expenditures are also tracked within the government accounting system including:

- ministry directly-paid expenditures on airfare; and
- employee (paper-based) travel vouchers for travel on other modes.

Column 5 of Table 12 below indicates which section of this document provides more detail on the related travel mode in Column 4.

Table 12: Non-iExpenses Business Travel Selections

(1)	(2) Subaccount	(3) Travel Mode Possibilities	(4) Most Frequent Travel Mode	(5) Section with Detailed Description
Directly Paid Air Travel	Victoria to Vancouver	Float Plane, helicopter, short-haul air	Float Plane	6.4
	In-Province	Short-haul flights; medium-haul air	Short-Haul	
	Out-of-Province	Medium and long-haul flights	Long-Haul	
	Out-of-Canada	Long-haul flights	Long-Haul	
Travel Voucher or Other Modes	Victoria to Vancouver	All ground transport modes and accommodations	N /A	6.5
	In-Province			
	Out-of-Province			
	Out-of-Canada			

6 Business Travel – Distance and Spend-based

6.1 Car, Truck, or SUV (Distance-based)

Description: This section covers travel by taxis, rental cars, and business use of personal vehicles. It provides distance-based emission factors based on average fuel efficiencies for common combinations of vehicle and fuel types. Vehicle types are: (1) cars (including hybrid electric vehicles) and (2) pickup trucks/SUVs. Fuel types are gasoline and diesel. Fuel efficiencies from NRCan are expressed in liters per 100 kilometres driven. Emission factors are expressed in kilograms per kilometre in CGRT.

Data sources: For road travel, NRCan publishes “city” and “highway” fuel economy ratings by vehicle manufacturer and model.³⁷ It is expected that most government travel falls between the conditions modeled for city and highway driving, tending closer to city estimates.³⁸ The city data used in Table 13 (below) to calculate average fuel efficiencies reflect city consumption and, therefore, does not require the application of an uplift factor.

For gasoline and diesel vehicles, data was obtained from [NRCan Comprehensive Energy Use Database, Transportation Sector – British Columbia and Territories](#) (2018).³⁹ Distances for road travel can be derived from the Government of B.C.’s Traveller Information System.⁴⁰ For hybrid and electric vehicles, data was obtained from [NRCan 2021 Fuel Consumption Guide](#).⁴¹ Explanation of terms used in NRCan datasets can be found [here](#).

³⁷ Natural Resources Canada. (2021). *2021 Fuel Consumption Guide*. Available: <https://www.nrcan.gc.ca/energy-efficiency/transportation-alternative-fuels/fuel-consumption-guide/21002>.

³⁸ The NRCan city ratings have been used here for several reasons. For example, most highway driving in the province’s metropolitan areas is characterized by considerable congestion, leading to higher fuel consumption. In the Interior, fuel efficiencies are likely to be higher than the theoretical (best practices) NRCan ratings, given weather and terrain. As a result, the city ratings can be assumed to capture some of the actual highway driving efficiencies in B.C. and lead to a more conservative estimate of the GHG emissions from business road travel.

³⁹ Natural Resources Canada. (2020). *Comprehensive Energy Use Database, Transportation Sector, British Columbia and Territories*. Available:

https://oee.nrcan.gc.ca/corporate/statistics/neud/dpa/menus/trends/comprehensive/trends_tran_bct.cfm

⁴⁰ DriveBC. (n.d.). “Plan your route.” Available: <https://drivebc.ca/directions.html>

⁴¹ Natural Resources Canada. (2021). *Fuel consumption ratings*. Available:

<https://open.canada.ca/data/en/dataset/98f1a129-f628-4ce4-b24d-6f16bf24dd64>

Table 13: Average Fuel Efficiencies for Car, Truck, or SUV Travel

Travel Mode	Vehicle/Fuel Type	Average Fuel Efficiency	Emission Factor (kg CO ₂ e/km)	Dataset	Source	Reference
Car (includes taxi)	Gasoline (standard blend)	0.082 L/km	0.192	CEUD – Transportation Sector – B.C. (2018)	Table 21	Cars On-Road Average Fuel Consumption (L/100 km) – Motor Gasoline
	Diesel	0.066 L/km	0.174			Cars On-Road Average Fuel Consumption (L/100 km) – Diesel Fuel Oil
	Hybrid	0.078 L/km	0.182	Plug-in hybrid electric vehicles 2012-2022	Consumption – City	Average of all “B” type vehicles
Light Truck (includes SUV and Minivan)	Gasoline	0.109 L/km	0.258	CEUD – Transportation Sector – B.C. (2018)	Table 37	Passenger Light Truck On-Road Average Fuel Consumption (L/100 km) – Motor Gasoline
	Diesel	0.089 L/km	0.234			Passenger Light Truck On-Road Average Fuel Consumption (L/100 km) – Diesel Fuel Oil
	Hybrid	0.098 L/km	0.232	Plug-in hybrid electric vehicles 2012-2022	Consumption – City	Average of all “B” type vehicles
Electric Vehicle	Electricity	0.197 kWh/km	0.0079	Battery-electric vehicles 2012-2022	Consumption – City	Average of all vehicles listed

Calculations: To calculate emissions from distance-based car, truck, or SUV travel, apply the average fuel efficiency (L/km) by the CO₂e of the vehicle fuel type.

Table 14: Sample Emission Factor Calculation for Car Travel

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
Travel Mode	Vehicle/Fuel Type	Average Fuel Efficiency (L/km)	Bio CO ₂	CO ₂	CH ₄	N ₂ O	CO ₂ e	CO ₂ e kg/km
Car	Gasoline	0.082	0.0754 ^b	2.1919	0.00023	0.00047	2.198	0.27

^a Emission factors in columns (5) through (7) are those listed in Table 8 for Light-Duty Vehicle – Gasoline (E5) from 1990-2019 NIR (Part 2).

^b Bio CO₂ value taken from Table 9.

6.2 Ferry (Distance-based)

Description: This section describes how the value of ferry travel emission factor was determined. In the context of ferry travel, the emission factor is expressed in kilograms of CO₂e per passenger kilometre (kg CO₂e/psg-km).

Data sources: BC Ferries provided emission factors for the following five ferry routes in kilograms of CO₂e per passenger trip (kg CO₂e/psg-trip).⁴² The data is an average of five years spanning from April 2017 to March 2021.

Table 15: Emission Factors for BC Ferries Routes

Route Number	Ferry Route	Emission Factor (kg CO ₂ e/psg-trip)
(1)	Tsawwassen – Swartz Bay	5.77
(2)	Horseshoe Bay – Nanaimo	5.90
(3)	Horseshoe Bay – Langdale	2.21
(8)	Horseshoe Bay – Snug Cove	1.39
(30)	Nanaimo – Tsawwassen	7.41

Currently, CGRT is configured with a single emission factor for ferry travel in kg CO₂e/psg-km. Therefore, a five-year weighted average of the above routes was calculated to determine a single emission factor for ferry travel (see Table 16 below).

Calculation: BC Ferries provided emission factors for the routes mentioned above in kilograms of CO₂e per passenger trip (kg CO₂e/psg-trip). Using the information provided by the annual reports prepared and submitted to the BC Ferries Commissioner, a five-year utilization percentage (2017-2021) was calculated by dividing the five-year average of automobile equivalents (AEQ) by the five-year average capacity provided of each ferry route.⁴³ Data extracted from iExpenses of the trips made by Provincial government from 2016-2020 shows that, on average during those years, about 85% of the trips were made from Metro Vancouver – Vancouver Island (routes 1, 2, and 30). There was no distinction in the iExpenses data amongst these routes, so they were weighted based on BC Ferries AEQs for each route. Metro Vancouver to Sunshine Coast was directly related to Horseshoe Bay to Langdale trips. The remainder of trips were assumed to have similar GHG intensities to the Horseshoe Bay to Snug Cove trip. They were reported as Haida Gwaii to Inside Passage (Prince Rupert), Vancouver Island to Inside Passage (Prince Rupert), Metro Vancouver to Gulf Islands, and Other. The weighting of total trips was calculated by multiplying each routes' weighting for total trips by the average percent of trips made for each route by government employees. Dividing the emission factors provided for each route by the five-year percent average utilization multiplied by the kilometres per trip, an emission factor (kg CO₂e/psg-km) is calculated. The weighted contribution to total emissions is then calculated by multiplying each routes emission factor by its percent weighting of total trips. Next, the portion of emissions from renewable fuels (kg Bio CO₂/psg-km) is calculated by multiplying each route's weighted contribution to total emissions by the percent of biodiesel in marine diesel (assumed to be 4%). Finally, the kg fossil

⁴² BC Ferries average emission factors (2017-2021) were provided by BC Ferries Services.

⁴³ BC Ferries. *Plans, Reports, Policies and Other Resources*, "Annual Reports to the Commissioner". Available: <https://www.bcferrries.com/in-the-community/resources>

CO₂e per passenger kilometre for each route is calculated by subtracting the kg Bio CO₂/psg-km from each route's weighted contribution to total emissions and an average of all routes is taken to obtain one emission factor for ferry travel (listed in the table below).

Table 16: Emission Factor for Ferry Travel

Travel Mode	Emission Factor (kg CO₂e/psg-km)
Ferry	0.1117

6.3 Air Transport (Distance-based)

Description: This section provides details about distance-based air travel.

Data sources: Emission factors for distance-based air transport are from HarbourAir’s 2017 GHG Report,⁴⁴ HeliJet, and the UK Department for Environment, Food and Rural Affairs (DEFRA) 2021 Government Greenhouse Gas Conversion Factors for Company Reporting.⁴⁵

Table 17: Distance-based Air and Public Transport

Travel Type	Travel Mode	Source	Reference
Air Transport	Float plane (Vancouver-Victoria)	HarbourAir 2017 GHG Report	Page 5, Emissions per route
	Helicopter	HeliJet	
	Airplane (short-haul <415km)		Domestic (without RF)
	Airplane (medium-haul 415-1316km)	DEFRA Conversion Factors 2021: condensed set ^a	Short-haul (without RF)
	Airplane (long-haul >1316km)		Long-haul (without RF)

^a Emission factors can be found in ‘Scope 3 factors: Business travel – air’.

6.3.1 Helicopter & Floatplane

The emission factors for air transport by helicopter were provided directly by HeliJet. Floatplane travel was calculated based on HarbourAir’s 2017 emissions per passenger journey from operating flights between Vancouver harbour and Victoria harbour.

6.3.2 Airplane

While NRCan also publishes aggregate data on GHG emissions and passenger-km for air travel, no breakdown is provided for haul distance. In contrast, UK’s Department of Environment, Food and Rural Affairs (DEFRA) has estimated emission factors for three categories of flights:⁴⁶

- (1) domestic,
- (2) short haul international, and
- (3) long haul international.

For the B.C. government’s purposes, the forgoing DEFRA categories have been applied as follows:

- (1) the domestic emission factor has been applied to short haul flights,
- (2) the short haul international emission factor has been applied to medium haul flights, and

⁴⁴ Harbour Air. (2017). *Harbour Air’s 2016-2017 Greenhouse Gas Report*. Available:

<https://www.harbourair.com/wp-content/uploads/2019/01/Harbour-Air-2017-GHG-Report.pdf>

⁴⁵ DEFRA. (2021). *2021 Government Greenhouse Gas Conversion Factors for Company Reporting*. Available:

<https://www.gov.uk/government/publications/greenhouse-gas-reporting-conversion-factors-2021>

⁴⁶ Ibid.

(3) the long-haul international emission factor has been applied to long haul flights.⁴⁷

The DEFRA air travel emission factors include an eight percent uplift factor based on the recommendation of the Intergovernmental Panel on Climate Change to account for discrepancies between geographical distance and actual flight distance.⁴⁸ These discrepancies can result from conditions such as non-linear routing that is not the shortest direct distance, delays or circling, and routings of take-off and landing. B.C.’s distance-based method uses the shortest geographical distance between the starting point and the destination. The eight percent uplift factor is used to adjust for the difference between this shortest distance calculation and the actual travel path of the aircraft.

6.4 Air and Public Transport (Spend-based)

Description: This section describes how emission factors can be determined for various travel modes when related expenditure data exists but little or no distance data is available. This approach generally involves one of the following algorithms for each travel mode when determining the associated emissions per dollar of expenditure.

Equation 1:	Travel Mode’s Distance-Based Emission Factor (kg CO ₂ e / km)	÷	Travel Mode’s Cost per kilometre (\$ / km)	=	Travel Mode’s Spend-Based Emission Factor (kg CO ₂ e / \$)
Equation 2:	Travel Mode’s Average Emissions per Trip (kg CO ₂ e / trip)	÷	Travel Mode’s Cost per Trip (\$ / trip)	=	Travel Mode’s Spend-Based Emission Factor (kg CO ₂ e / \$)

The following tables provide emission factors for spend-based air transport, ministry directly paid air transport, and public transport. An explanation of values and their respective references are provided above each table.

Data sources: Data for distance-based emission factors used to calculate spend-based air transport in Table 18 and Table 19 (below) are derived from Table 17. Data for transit ridership and fares to calculate spend-based public transport emission factors are provided by TransLink and BC Transit.

Within the context of air travel tracked through iExpenses, the spend-based emission factors noted in Table 18 were applied to the business travel of employees who selected:

- ◆ “float plane”, “helicopter”, “airplane” as travel modes, and
- ◆ “Other” or “Other BC” as their destinations.

⁴⁷ The DEFRA categories are applied on the basis of distance rather than destination because conditions of European air travel vary substantially from those in B.C. (e.g., a typical Canadian domestic flight is likely to be much longer than a typical UK domestic flight).

⁴⁸ IPCC (1999). *Aviation and the Global Atmosphere*, Section 8.2.2.3. Available: <http://www.ipcc.ch/ipccreports/sres/aviation/index.php?idp=118>

Table 18: Emission Factors for Spend-based Air Transport

Travel Type	Travel Mode	Distance-based Emission Factor kg CO ₂ e / psg-km	Average Cost \$ / km	Spend-based Emission Factor kg CO ₂ e / \$
Air Transport	Float plane	0.2086	1.52	0.1372
	Helicopter	0.4469	2.25	0.1986
	Airplane – Short Haul	0.1300	0.93	0.1295
	Airplane – Medium Haul	0.0812	0.75	0.1003
	Airplane – Long Haul	0.1021	0.81	0.1167
	Airplane – Weighted Average of Short/Med/Long Haul ^a	0.0923	0.78	0.1176

^a In the absence of distance data, it is not possible to distinguish between short-, medium-, and long-haul airplane travel. In this case, a weighted average of the distance-based emission factors for those air travel categories has been used. The weighting is based on total distance reported in iExpenses for each category in 2019 and 2020.

In the context of ministry directly-paid expenditures on travel, expenditures are tracked within sub-accounts representing air travel:

- ◆ between Victoria/Vancouver;
- ◆ in-province travel;
- ◆ out-of-province travel, and
- ◆ out-of-country travel.

The air transport options for these subaccounts are presented in Table 19. The emission factor selected for each subaccount was based on historical data which identifies the modes most frequently taken for each subaccount (i.e., trip category).

Table 19: Emission Factors for Spend-based Ministry Directly-Paid Air Transport

Directly Paid Subaccount ⁴⁹	Common Air Transport Modes	Emission Factor kg CO ₂ e / \$	Reference
Victoria to Vancouver	Float plane	0.1986	Table 18: Helicopter
	Helicopter		
In-Province	Short-haul	0.1398	Table 18: Short-haul
Out-of-Province	Medium-haul	0.1082	Table 18: Medium-haul
	Long-haul		
Out-of-Canada	Long-haul	0.1260	Table 18: Long-haul

⁴⁹ The Standard Object of Expenditure (STOB) account numbers for these subaccounts are as follows: 5711 for Victoria to Vancouver, 5712 for In-Province, 5713 for Out-of-Province, and 5714 for Out-of-Canada.

Data sources: Data from BC Transit and Translink was used to calculate spend-based public transport emission factors. Please see below for details on how the values in Table 20 were derived.

Table 20: Emission Factors for Spend-based Public Transport

Public Transport Mode	Distance-based Emission Factor ^a kg CO ₂ e / psg-km	kg CO ₂ e / trip	Average Cost \$ / km OR \$ / trip	Spend-based Emission Factor kg CO ₂ e / \$
Taxi	0.1917		2.30/km	0.0833
City Bus	0.1016	0.4821	2.55/trip	0.1891
Skytrain		0.1050	4.35/trip	0.0241
SeaBus		0.5020	4.35/trip	0.1154
Weighted Average - Transit				0.0594
Rail	0.1215		0.31/km	0.3919
Intercity Bus	-	-	-	0.1891
Weighted Average – Public Transport, Other				0.1984

^a Distance-based emission factors are derived from Table 17.

Public transport emission factors are grouped into the following sections:

- ◆ Public Transport – Taxi;
- ◆ Public Transport – Transit: City Bus, Skytrain, SeaBus, and
- ◆ Public Transport – Other: Rail and Intercity Bus.

The following sections provide a description of how each public transport mode’s emission factors in Table 20 were calculated to derive emission factors for the reporting categories listed above.

6.4.1 Taxi

The spend-based emission factor for Taxi was calculated using Equation 1 which requires:

- ◆ Average taxi cost per kilometre
- ◆ Taxi emissions per kilometre

Average Taxi Cost Per Kilometre

All taxis in B.C. charge rates regulated by the Passenger Transportation Board, an independent tribunal of the Ministry of Transportation and Infrastructure.⁵⁰ Rates across B.C. vary only slightly. The rates used for the purposes of quantifying business travel emissions are the provincial average as stated by the Board:

- ◆ **Flag Fee:** \$3.32: The flag fee is the automatic minimum fee a passenger pays for a taxi. When you order a taxi, the meter will already be at \$3.32 when you step inside.⁵¹

⁵⁰ Passenger Transportation Board. (2016). “Taxi Rates”. Available: <http://www.ptboard.bc.ca/taxi-rates.htm>

⁵¹ \$3.32 is the average flag fee, but this may change slightly on a case-by-case basis.

- ◆ **Per Kilometre Fee:** \$2.03: Passengers are charged this fee for every kilometre they travel in a taxi if the taxi is not in traffic and forced to drive slowly. If it is, the following fee may apply.
- ◆ **Wait Time:** \$40.79 per hour: This fee is charged if the taxi must wait.

According to two major taxi companies in Victoria and Vancouver, the average trip cost and length was:

- ◆ Victoria: \$21; 9.0 km, and
- ◆ Vancouver: \$15; 6.5 km,

yielding an average cost of \$2.30/km.

Average Taxi Emissions Per Kilometre

Based on the conservative assumption that taxis are generally standard gasoline-fuelled cars, the distance-based emission factor is 0.19 kg of CO₂e per km travelled (refer to Table 17). This is considered a conservative assumption, as taxi companies are increasingly going electric. This assumption will be reviewed in future iterations of this document.

Spend-Based Taxi Emission Factor

Using Equation 1 and the information above, the spend-based emission factor for taxi travel is calculated as follows:

Travel Mode's Distance-Based Emission Factor (kg CO ₂ e / km)	÷	Travel Mode's Cost per kilometre (\$ / km)	=	Travel Mode's Spend-Based Emission Factor (kg CO ₂ e / \$)
0.192	÷	2.30	=	0.0833

6.4.2 Transit (City Bus, Skytrain, SeaBus)

Employees who travel on a city bus, Skytrain, or SeaBus must select “Transit” within the iExpenses system. For this reason, the spend-based emission factor for the Transit travel mode was calculated as a weighted average of the city bus, Skytrain, and Seabus factors, weighted by the number of trips recorded for the period 2008-2016.⁵²

City Bus:

The spend-based emission factor for City Bus was estimated using Equation 2 which requires:

- ◆ Average City Bus cost per trip
- ◆ Average City Bus emissions per trip

Average Cost Per Trip

A standard trip on a city bus costs \$2.50 in Victoria and \$2.80 in Vancouver. Fares tend to be cheaper in the rest of the province. Therefore, \$2.55 was used as the standard price of one bus trip.

Average Emissions Per Trip – BC Transit

⁵² Since data for number of trips is not accessible in iExpenses, recorded data in SMARTTEC from 2008-2016 is used for calculations in this section.

BC Transit’s reporting through the CGRT provides data on the total emissions from BC Transit operations. In 2019, BC Transit’s revenue fleet service emitted 62,289 tonnes, or 62,289,000 kilograms, of fossil fuel-based CO₂e.⁵³ BC Transit reported approximately 58.7 million rides in 2019/20 (April 1, 2019 to March 30, 2020).⁵⁴

Average Emissions Per Trip – TransLink

TransLink Enterprise’s 2020 Accountability Report includes their revenue fleet emissions.⁵⁵ A five-year average of 134,271 tonnes, or 134,271,000 kilograms, of CO₂e was reported. Emissions from TransLink’s revenue fleet make up 90% of TransLink’s total emissions, and emissions from the bus fleet make up just over 80% of total TransLink emissions. Revenue service emissions were determined by multiplying by 0.8/0.9, to give 119,352 t CO₂e. TransLink reported 318,062,000 annual boardings in 2019.⁵⁶

Calculating Total Emissions Per Trip – BC Transit and TransLink

Sum of Emissions (kg CO ₂ e)	÷	Sum of Trips	=	Total (kg CO ₂ e / trip)
181,641,000	÷	376,762,000	=	0.4821

Spend-Based City Bus Emission Factor

Using Equation 2 and the information above, the spend-based emission factor for City Bus travel is calculated as follows:

Sum of Emissions per Trip (kg CO ₂ e / trip)	÷	Sum of Cost per Trip (\$ / trip)	=	Total Spend-Based Emission Factor (kg CO ₂ e/ \$)
0.482	÷	2.55	=	0.189

Skytrain:

The spend-based emission factor for Skytrain was estimated using Equation 2 which requires:

- ◆ Average Skytrain cost per trip, and
- ◆ Average Skytrain emissions per trip.

⁵³ Data extracted from the Clean Government Reporting Tool for 2019.

⁵⁴ BC Transit (2020). *BC Transit 2019/20 Annual Service Plan Report*. p. 11. Available: <https://www.bctransit.com/documents/1529710288414>

⁵⁵ TransLink (2021). *TransLink Enterprise 2020 Accountability Report*. Available: <https://www.translink.ca/-/media/translink/documents/about-translink/corporate-reports/accountability-reports/2020/2020-accountability-report.pdf>

⁵⁶ TransLink. (2020). *2019 Transit Service Performance Review: Summary Tables*. Available: <https://www.translink.ca/-/media/translink/documents/plans-and-projects/managing-the-transit-network/tspr/tspr-2019-summary-tables.pdf>

Average Skytrain Cost Per Trip

Skytrain fares depend on the number of zones travelled (1, 2, or 3). Many different possibilities exist for trip distance within each zone. This estimate uses the price for a 2-zone trip (\$4.35) combined conservatively with the longest distance logged in the system over the lifespan of iExpenses approximately 45 kilometres.

Average Skytrain Emissions Per Trip

Using the 45-kilometre distance per trip noted above, and the distance-based emission factor of 0.002334 kg CO₂e/km, a standard trip will generate 0.105 kg of CO₂e.

Spend-Based Skytrain Emission Factor

Using Equation 2 and the information above, the spend-based emission factor for Skytrain travel is calculated as follows:

Travel Mode's Emissions per Trip (kg CO ₂ e / trip)	÷	Travel Mode's Cost per Trip (\$ / trip)	=	Travel Mode's Spend-Based Emission Factor (kg CO ₂ e / trip)
0.105	÷	4.35	=	0.0241

SeaBus:

The spend-based emission factor for SeaBus was estimated using Equation 2 which requires:

- ◆ Average SeaBus cost per trip, and
- ◆ Average SeaBus emissions per trip.

Average SeaBus Cost Per Trip

A one-way trip on the SeaBus costs \$4.35.

Average SeaBus Emissions Per Trip

Based on 3.25 km distance for a one-way SeaBus trip, and the distance-based emission factor of 0.1547 kg CO₂e/km, a one-way SeaBus trip will generate 0.502 kg CO₂e per passenger.

Spend-Based SeaBus Emission Factor

Using Equation 2 and the information above, the spend-based emission factor for SeaBus travel is calculated as follows:

Travel Mode's Emissions per Trip (kg CO ₂ e / trip)	÷	Travel Mode's Cost per Trip (\$ / trip)	=	Travel Mode's Spend-Based Emission Factor
0.502	÷	4.35	=	0.115

6.4.3 Weighted Average – Transit

The spend-based emission factor for the Transit travel mode was calculated as a weighted average of the city bus, Skytrain, and Seabus factors, weighted by the number of trips recorded for the period 2008-2016. According to the data, there were 378 city bus trips, 1,471 Skytrain trips, and 51 SeaBus trips. Using these values as relative weights, the Transit spend-based emission factor is:

$$\frac{378(0.1891) + 1,471(0.0241) + 51(0.1154)}{378 + 1,471 + 51} = 0.0594 \text{ kg CO}_2\text{e}/\$$$

6.4.4 Other Public Transport (Rail, Intercity Bus)

Employees who travel by rail and intercity buses must select “Other” under Public Transport within the iExpenses system. For this reason, the spend-based emission factor for the Transit travel mode was calculated as a weighted average of the factors for these two modes of travel, weighted by the number of trips recorded for the period 2008-2016.

Rail:

The spend-based emission factor for rail was estimated using Equation 1 which requires:

- ◆ Average cost of Rail per kilometre, and
- ◆ Average Rail emissions per kilometre.

Average Cost of Rail Per Kilometre

Data for the period 2008-2016 shows 36 rail trips at an average cost of \$0.31/km.

Average Rail Emissions Per Kilometre

The distance-based emission factor for rail is 0.1215 kg CO₂e/km.

Spend-Based Rail Emission Factor

Using Equation 1 and the information above, the spend-based emission factor for rail travel is calculated as follows:

Travel Mode’s Distance-Based Emissions Factor (kg CO ₂ e / km)	÷	Travel Mode’s Cost per Kilometre (\$ / km)	=	Travel Mode’s Spend-Based Emission Factor (kg CO ₂ e/ \$)
0.1215	÷	0.31	=	0.3919

Intercity Bus:

In the absence of reliable cost data, the spend based emission factor city bus of **0.189 kg CO₂e/\$** has been applied to intercity buses. This is a conservative approach given that Table 11 of NRCAN (2015) shows that intercity buses emit approximately half the emissions of city buses.⁵⁷

⁵⁷ Natural Resources Canada. (2015). *Comprehensive Energy Use Database, Transportation Sector, 1990-2012*. Available: https://oee.nrcan.gc.ca/corporate/statistics/neud/dpa/menus/trends/comprehensive_tables/list.cfm

6.4.5 Weighted Average – Other Public Transport

The spend-based emission factor for the “Other” public transport mode was calculated as a weighted average of the rail and intercity bus factors, weighted by the number of trips recorded for the period 2008-2016. According to the data, there were 36 rail trips and 748 intercity bus trips. Using these values as relative weights, the “Other” spend-based emission factor is:

$$\frac{(36 \times 0.3919) + (748 \times 0.1891)}{(36 + 748)} = 0.1984 \text{ kg CO}_2\text{e}/\$$$

6.5 Travel Vouchers

Travel vouchers provide a paper-forms approach to obtain reimbursement for travel expenses for employees that are unable to use iExpenses. Employees generally submit completed forms to their finance staff for entry into the government’s accounting system.

In this case, the travel involved can include all forms of public transport: ferry, bus, taxi, personal vehicles, transit, and accommodations. However, the accounting system provides no details about such travel other than approximate destinations based on the following sub-accounts (account numbers provided):

- ◆ Victoria/Vancouver (5701, 5720, 5730),
- ◆ In-Province (5702, 5731),
- ◆ Out-of-Province (5704, 5722, 5735, 5703, 5721, 5732, 5705, 5706), and
- ◆ Out-of-Country (5735).

The estimation of the emission factor for these subaccounts was based on a highly simplified approach, using an estimated total value for business travel emissions based on emission values from previous years:

$$\begin{array}{r} \text{Estimated Total} \\ \text{Business Travel} \\ \text{Emissions} \\ \text{(kg CO}_2\text{e)} \end{array} \div \begin{array}{r} \text{“Other Modes”} \\ \text{Business Travel} \\ \text{Expenditures} \\ \text{(\$)} \end{array} = 0.2900 \text{ kg CO}_2\text{e} / \$$$

This factor may also be used to estimate the emissions from other, non-standard, business travel expenses.

7 Accommodation

Description: In addition to transportation-related GHGs from business travel, Provincial Government entities (i.e. ministries, special offices, tribunals) are also required to quantify, reduce, offset, and report the indirect emissions that result from employee stays in hotels, bed and breakfasts, and private accommodations while on business travel.

Data sources: The B.C. emission factor for accommodation was derived from the annual Cornell Hotel Sustainability Benchmark study which provides information on energy and water usage in hotels across a total of 21,432 participating hotels from 26 international hotel chains over the past three years (2017-2019).⁵⁸ The emission factor for overnight accommodation in Canada was derived from the 2021 UK Government GHG Conversion Factors for Company Reporting.⁵⁹

Calculations: iExpenses tracks accommodations in terms of the number of nights stayed in a hotel/motel, bed and breakfast, or private accommodations.

Table 21: Emission Factor for Accommodation

	Location	kg CO ₂ e / room / night
Hotel Stay	Canada	16.1
	B.C.	6.6
Weighted Average ^a		7.455

^a Based on 91% B.C.-stay rate since 2016.

⁵⁸ Ricaurte, Eric, and Rehmaashini Jagarajan. (2021). *Hotel Sustainability Benchmarking Index 2021: Carbon, Energy, and Water*. Available: <https://ecommons.cornell.edu/handle/1813/109990>.

⁵⁹ U.K. Department for Business, Energy, & Industrial Strategy. (2022). *Greenhouse gas reporting: Conversion factors 2021*. Available: <https://www.gov.uk/government/publications/greenhouse-gas-reporting-conversion-factors-2021>

ANNEX 1: GLOSSARY OF TERMS AND ACRONYMS

Note: Definitions derived from:

- IPCC. (2018). *Fifth Assessment Report*. “Annex 2, Glossary” and “Index”. Available: https://www.ipcc.ch/site/assets/uploads/2018/02/AR5_SYR_FINAL_Annexes.pdf
- Market Advisory Committee to the California Air Resources Board. (2007). “Recommendations for Designing a Greenhouse Gas Cap-and-Trade System for California.”
- The Climate Registry. (2019). *General Reporting Protocol Version 3.0*. “Glossary of Terms”. pp. 64. Available: <https://www.theclimateregistry.org/protocols/General-Reporting-ProtocolV3.pdf>

Table 22: Terms and Acronyms

Abbreviation, Acronym or Measure	Definition
Carbon dioxide (CO₂)	A naturally occurring gas (0.03% of atmosphere) that is also a by-product of the combustion of fossil fuels and biomass, land-use changes, and other industrial processes. It is the principal anthropogenic greenhouse gas. It is the reference gas against which other greenhouse gases are measured and therefore has a Global Warming Potential of 1. (IPCC)
Carbon dioxide equivalent (CO₂e)	“The universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide.” (GHG Protocol) Expressing all GHGs in terms of tonnes of CO ₂ e allows the different gases to be aggregated.
Community Energy and Emissions Inventory	The Community Energy and Emissions Inventory (CEEI) represents energy consumption and GHG emissions from community activities in on-road transportation, buildings and solid waste. Estimates of land-use change from deforestation activities and enteric fermentation from livestock under the Agricultural sector are also available.
Biofuel	A fuel produced from dry organic matter or combustible oils produced by plants. Examples of biofuel include alcohol (from fermented sugar), black liquor from the paper manufacturing process, wood and soybean oil.
Direct emissions	Emissions from sources that are owned or leased by a PSO or sources used by local governments to deliver traditional local government services
EDF	Environmental Defense Fund, a US-based environmental organization.
Emission factor	“A factor allowing GHG emissions to be estimated from a unit of available activity data (e.g. tonnes of fuel consumed, tonnes of product produced) and absolute GHG emissions” (GHG Protocol)
Emissions	“The release of substances (e.g., greenhouse gases) into the atmosphere. Emissions occur both through natural processes and as a result of human activities.” (CARB)
Energy conversion factor	A factor used to convert a quantity of energy from its original physical unit into a common unit of measurement (e.g., GJ).
Fugitive emissions	The unintended or incidental release of greenhouse gases from the transmission, processing, storage, use, or transportation of fossil fuels, GHGs, other substances, including but not limited to HFC emissions from refrigeration leaks and SF ₆ from electric power distribution equipment.

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

Abbreviation, Acronym or Measure	Definition
Gigajoule (GJ)	One billion joules, where a joule is a common unit of energy for comparing across fuel types and electricity.
Gigawatt-hour (GWh)	One million kilowatt-hours, enough electricity to power 100 homes for a year.
Global Warming Potential (GWP)	“Greenhouse gases differ in their effect on the Earth’s radiation balance depending on their concentration, residence time in the atmosphere, and physical properties with respect to absorbing and emitting radiant energy. By convention, the effect of carbon dioxide is assigned a value of one (1) (i.e., the GWP of carbon dioxide =1) and the GWPs of other gases are expressed relative to carbon dioxide. For example, in the U.S. national inventory, the GWP of nitrous oxide is 298 and that of methane 25, indicating that a tonne of nitrous oxide has 298 times the effect on warming as a ton of carbon dioxide. Slightly different GWP values for greenhouse gases have been estimated in other reports. Some industrially produced gases such as sulfur hexafluoride (SF ₆), perfluorocarbons (PFCs), and hydrofluorocarbons (HFCs) have extremely high GWPs. Emissions of these gases have a much greater effect on global warming than an equal emission (by mass) of the naturally occurring gases. Most of these gases have GWPs of 1,300 - 23,900 times that of CO ₂ . The US and other Parties to the UNFCCC report national greenhouse gas inventories using GWPs from the IPCC's Second Assessment Report (SAR). SAR GWPs are also used for the Kyoto Protocol and the EU ETS. GWPs indicated in this document also refer to the IPCC’s Second Assessment Report.” (CARB)
Global Reporting Initiative (GRI)	An international initiative that has developed a sustainability reporting framework for organizations to measure and report on their economic, environmental and social performance (see: GRI - Home (globalreporting.org)).
Greenhouse gases (GHGs)	“Greenhouse gases include a wide variety of gases that trap heat near the Earth’s surface, slowing its escape into space. Greenhouse gases include carbon dioxide, methane, nitrous oxide and water vapor and other gases. While greenhouse gases occur naturally in the atmosphere, human activities also result in additional greenhouse gas emissions. Humans have also manufactured some gaseous compounds not found in nature that also slow the release of radiant energy into space.” (CARB)
HVAC	Heating, Ventilating and Air Conditioning
Hydrofluorocarbons (HFCs)	“One of the six primary GHGs. Synthetic industrial gases, primarily used in refrigeration and other applications as commercial substitutes for chlorofluorocarbons (CFCs). There are no natural sources of HFCs. The atmospheric lifetime of HFCs is decades to centuries, and they have "global warming potentials" thousands of times that of CO ₂ , depending on the gas. HFCs are among the six greenhouse gases to be curbed under the Kyoto Protocol.” (CARB)
Indirect emissions	Emissions that are a consequence of the operations of the reporting organization (i.e., PSO, local government, community), but occur at sources owned or controlled by another organization.

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

Abbreviation, Acronym or Measure	Definition
Intergovernmental Panel on Climate Change (IPCC)	“Recognizing the problem of potential global climate change, the World Meteorological Organization (WMO) and the United Nations Environment Programme (UNEP) established the Intergovernmental Panel on Climate Change (IPCC) in 1988. It is open to all members of the UN and WMO. The role of the IPCC is to assess on a comprehensive, objective, open and transparent basis the scientific, technical and socio-economic information relevant to understanding the scientific basis of risk of human-induced climate change, its potential impacts and options for adaptation and mitigation. The IPCC does not carry out research nor does it monitor climate related data or other relevant parameters. It bases its assessment mainly on peer reviewed and published scientific/technical literature.” (CARB)
Inventory	“A greenhouse gas inventory is an accounting of the amount of greenhouse gases emitted to or removed from the atmosphere over a specific period of time (e.g., one year). A greenhouse gas inventory also provides information on the activities that cause emissions and removals, as well as background on the methods used to make the calculations. Policy makers use greenhouse gas inventories to track emission trends, develop strategies and policies and assess progress. Scientists use greenhouse gas inventories as inputs to atmospheric and economic models” (CARB)
kg	Kilogram
kilotonne	1,000 tonnes
km	Kilometre
kWh	kilowatt-hour
L	Litre
lb	pound (weight)
m³	cubic metre
Methane (CH₄)	“One of the six greenhouse gases to be curbed under the Kyoto Protocol. Atmospheric CH ₄ is produced in nature, but human related sources such as landfills, livestock feedlots, natural gas and petroleum systems, coal mines, rice fields, and wastewater treatment plants also generate substantial CH ₄ emissions. CH ₄ has a relatively short atmospheric lifetime of approximately 10 years, but its 100-year GWP is currently estimated to be approximately 25 times that of CO ₂ .” (CARB)
MVAC	Motor Vehicle Air Conditioning
NIR	National Inventory Report (Environment Canada)
Nitrous oxide (N₂O)	“One of the six greenhouse gases to be curbed under the Kyoto Protocol. N ₂ O is produced by natural processes, but substantial emissions are also produced by such human activities as farming and fossil fuel combustion. The atmospheric lifetime of N ₂ O is approximately 100 years, and its 100-year GWP is currently estimated to be 298 times that of CO ₂ .” (CARB)
Office Paper	Multipurpose copy paper for use in laser printers, fax machines and photocopiers or multifunction devices.
Perfluorocarbons (PFCs)	“PFCs are among the six greenhouse gases to be curbed under the Kyoto Protocol. PFCs are synthetic industrial gases generated as a by-product of aluminum smelting and uranium enrichment. They also are used in the manufacture of semiconductors. There are no natural sources of PFCs. PFCs have atmospheric lifetimes of thousands to tens of thousands of years and 100-year GWPs thousands of times that of CO ₂ , depending on the specific PFC.” (CARB)

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

Abbreviation, Acronym or Measure	Definition
pkg	Package
PSO	A B.C. public sector organization subject to the government's carbon neutral commitment under the <i>Climate Change Accountability Act</i> .
RESO	Report on Energy Supply and Demand (Statistics Canada).
STP	Standard Temperature and Pressure
Sulphur Hexafluoride (SF ₆)	One of the six greenhouse gases to be curbed under the Kyoto Protocol. SF ₆ is a synthetic industrial gas largely used in heavy industry to insulate high-voltage equipment and to assist in the manufacturing of cable-cooling systems. There are no natural sources of SF ₆ . SF ₆ has an atmospheric lifetime of 3,200 years. Its 100-year GWP is currently estimated to be 22,800 times that of CO ₂ ." (CARB)
t	metric tonne, a standard measurement for the mass of GHG emissions, equivalent to 1,000 kg, 1,204.6 pounds, or 1.1 short tons.

ANNEX 2: GLOBAL WARMING POTENTIALS

The 100-year GWPs for the GHGs being tracked by the B.C. public sector are listed in the Carbon Neutral Government Regulation. The Province updated the GWPs in 2022 to reflect the 2014 values from the IPCC's *Fifth Assessment Report*. The updated GWPs are the standard emission factors to be used in GHG emissions calculations in B.C..⁶⁰

At the time of drafting this document, the updated GWPs were not reflected in the Carbon Neutral Government Regulation. To access the updated GWPs please see [Order in Council No. 682](#).

⁶⁰ British Columbia (2020). *B.C. Provincial Greenhouse Gas Inventory Report 2019*, p. 3. Available: <https://www2.gov.bc.ca/gov/content/environment/climate-change/data/provincial-inventory/archive>

ANNEX 3: SELECTED REFERENCES

- British Columbia. (2020). *B.C. Provincial Greenhouse Gas Inventory Report 2019*. Retrieved January 5, 2023, from <https://www2.gov.bc.ca/gov/content/environment/climate-change/data/provincial-inventory/archive>
- Environment Canada. (2021). *National Inventory Report: Greenhouse Gas Sources and Sinks in Canada 1990-2019*. The Canadian Government's Submission to the United Nations Framework Convention on Climate Change. Retrieved January 5, 2023, from <https://unfccc.int/documents/271493>
- Government of the United Kingdom (n.d.). *Department for Environment, Food & Rural Affairs*. GOV.UK. Retrieved January 5, 2023, from <https://www.gov.uk/government/organisations/department-for-environment-food-rural-affairs>
- Intergovernmental Panel on Climate Change. (2006). *2006 IPCC Guidelines for National Greenhouse Gas Inventories*. Volume 5. Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. and Tanabe K. (eds). Retrieved January 5, 2023, from www.ipcc-nggip.iges.or.jp/public/2006gl/index.html.
- Government of Canada (n.d.). *Natural Resources Canada*. Natural Resources Canada. Retrieved January 5, 2023, from <https://www.nrcan.gc.ca/home>
- Natural Resources Canada. (2021). *2021 Fuel Consumption Guide*. Retrieved January 5, 2023, from <https://www.nrcan.gc.ca/energy-efficiency/transportation-alternative-fuels/fuel-consumption-guide/21002>.
- Natural Resources Canada. (2021). Fuel consumption ratings. Retrieved January 5, 2023, from <https://open.canada.ca/data/en/dataset/98f1a129-f628-4ce4-b24d-6f16bf24dd64>
- Natural Resources Canada. (2015). Comprehensive Energy Use Database, Transportation Sector, British Columbia and Territories, 1990-2012. Retrieved January 5, 2023, from https://oee.nrcan.gc.ca/corporate/statistics/neud/dpa/menus/trends/comprehensive_tables/list.cfm
- Natural Resources Canada. (2020). Comprehensive Energy Use Database, Transportation Sector, British Columbia and Territories, 1990-2018. Retrieved January 5, 2023, from https://oee.nrcan.gc.ca/corporate/statistics/neud/dpa/menus/trends/comprehensive/trends_transport.ct.cfm
- Statistics Canada. (2021). *Report on Energy Supply and Demand in Canada 2018*. Retrieved January 5, 2023, from <https://www150.statcan.gc.ca/n1/en/catalogue/57-003-X>
- The Climate Registry. (2019). *General Reporting Protocol, Version 3.0*. Retrieved January 5, 2023, from <https://www.theclimateregistry.org/protocols/General-Reporting-ProtocolV3.pdf>
- The Climate Registry (n.d.). *Credible Carbon Reporting*. Retrieved January 5, 2023, from <https://theclimateregistry.org/>
- The Climate Registry. (May 2021). *2021 Climate Registry Default Emission Factors*. Retrieved January 5, 2023, from <https://www.theclimateregistry.org/wp-content/uploads/2021/05/2021-Default-Emission-Factor-Document.pdf>

World Resources Institute (n.d.). *World Resources Institute*. Retrieved January 5, 2023, from <https://www.wri.org/>

ANNEX 4: DOCUMENT VERSION CONTROL

Reporting Year	Section (s)	Updates Include:
2022	2.3	Updated Renewable Energy Certificate policy
	Throughout	Improved accessibility
	Throughout	Changed GWP references from AR4 to AR5
	4	Added research being undertaken on the relative merits of alternative types of paper
	3.1	Update mobile emission factors to reflect more stringent federal air pollution standards
		Added electricity as a mobile fuel option
1.1	Moved the Community Emissions Inventory (CEEI) to section 1.1.2 Local	
2021	Table Of Contents (TOC)	Updated structure
		Removed Section 3.2 Natural Gas Vehicle Emission Factors
		Removed Section 3.3.2 Public Transport (distance-based)
		Removed Section 6 Agricultural Emission Factors
	Throughout	Removed references to Local Governments and other users in Section 1.4 Users/Audience and throughout document
		Updated emission factors and their respective sources
	Section 2.3 Purchased electricity emission factors aligned with GGIRCA	
2020	Figure 2	Updated decision tree to reflect available CGRT configuration
	Throughout	Updated references from SMARTTool to CGRT to reflect transition to the new tool and decommissioning of SMARTTool in 2019
	Table 21	Updated Energy Intensity Unit factors based on primary function to align with those adopted by Energy Star Portfolio Manager and configured in CGRT
	Section 2.2	Updated intention to align with GGIRCA's grid-based electricity emission factors for 2021 reporting year
2020	Section 3.2	Reinstated reference to the conversion of compressed natural gas to litres of gasoline and diesel equivalent
	Section 3.2	Ferry emission calculation correction
	Section 1	Updated dates from 2017 to 2018
2018	9, 12	Updated Carbon.Neutralapps@gov.bc.ca to Carbon.Neutral@gov.bc.ca
	7, 8, 29	Changed <i>Greenhouse Gas Reductions Target Act</i> (GGRTA) to <i>Climate Change Accountability Act</i> (CCAA)
	Section 3.2	Removed reference to the conversion of compressed natural gas to litres of gasoline and diesel as the web references are no longer valid
	Annex 1	Updated Glossary of Terms and Acronyms
	TOC	Removed Section 1.5 Structure
2017	Section 1.3	Reference to the National Inventory Report: Greenhouse Gas Sources and Sinks in Canada updated from 1990-2013 to 1990-2014
	Table 1, Table 2	Marine Diesel Emission Fraction for CH ₄ , N ₂ O and CO ₂ e updated
	Table 1, Table 2	Wood Fuel - Residential emission factor for BioCo ₂ , CH ₄ , N ₂ O and CO ₂ e updated
	Section 2.2	Electricity emission factors for Quebec and Nova Scotia added
	Table 3	Emission factors updated for BC Hydro, Kyoquot Power, Hemlock Valley, Alberta, Ontario, United Kingdom, India, Japan, China, Hong Kong, Nova Scotia, Quebec
	Table 4	Added Table 4: Historical Emission Factors for Purchased Electricity
	Table 7	Updated Emission Factors for Fleet: Off-Road Vehicle (Diesel), Marine (Gasoline), Marine (Diesel)

B.C. Best Practices Methodology for Quantifying Greenhouse Gas Emissions

	Section 4	Updated Business Travel reporting methods
	Table 22	Fixed EIU Factors updated for all Building Classifications
	Annex 5	Business Travel Methodology Added

