



TECHNICAL MEMORANDUM

DATE 12 May 2023

Reference No. 22520011-TM-RevB

TO

Ministry of Transportation and Infrastructure

CC

Michael Carreira (Binnie), Robert McMahon (Ausenco)

FROM

Emilio Martinez, MSc, PEng

EMAIL emilio.martinez@wsp.com

SILVER-SKAGIT ROAD FLOOD MITIGATION – 56.7 KM SITE HYDROTECHNICAL ASSESSMENT

1.0 INTRODUCTION

WSP has been retained by the Ministry of Transportation and Infrastructure (MOTI) to provide hydrotechnical engineering and design services for flood response mitigation and recovery works on the Silver-Skagit Road near Hope, BC. The project is divided into multiple sites depending on their location and level of urgency along the corridor. This memorandum describes the hydrotechnical considerations and assessment carried out related to the proposed mitigation design for the 56.7 km site.

The 56.7 km site requires road surface repairs and culvert replacement, as well as restoration of the main drainage channel towards Klesilkwa River across the Silver-Skagit Rd. The culvert replacement and road repairs are required due to washout from runoff and debris flows from the upper drainage across the Silver-Skagit Rd. The proposed culvert replacement and channel restoration returns the main drainage path towards Klesilkwa River to its original path prior the November 2021 flood event. Road alignment, geotechnical design, fill materials and geometry for the temporary road repairs were provided by the Highway Design Engineer (R.F. Binnie & Associates Ltd.) and geotechnical consultant (Wood PLC), and are outside of the hydrotechnical scope of work.

2.0 SITE CLIMATE AND HYDROLOGY

2.1 General Climate and Precipitation

Based on the Köppen climate classification, Hope has an oceanic climate with warm summers and moderately cold winters. Temperatures in Hope over the course of the year typically range from -2 °C to 25 °C and are rarely below -10 °C or above 31 °C with a distinct warm season between June and September, and a cold season between November and February. The hottest month of the year is typically August with an average high temperature of 24 °C, and the coldest month is typically December with an average low of -2 °C.

The chance of wet days in Hope varies significantly throughout the year. The wetter season is typically between October and April with the wettest month generally being November with an average rainfall of 199 mm; the driest month is generally August with an average rainfall of 34 mm. Wet days are comprised of rain only, snow only, and rain and snow events. The month with the most snow is January, with an average snowfall of 276 mm.

2.2 Watershed Hydrology and Peak Flows

Klesilkwa River is the main branch of the Skagit River, which flows toward south and drains to Ross Lake at the US-Canada border approximately 48 km south of Hope, BC; the river is approximately 26 km long from the upper reaches in the Cascade Range to Ross Lake and originates at around km 28 of Silver-Skagit Rd. The portion of the watershed draining to Klesilkwa River at the 56.7 km site is approximately 11.2 km² and consists of steep mountain terrain draining towards Klesilkwa River across the Silver-Skagit Road. Similar to other tributary catchments, the area draining to Klesilkwa River at the 56.7 km site is subject to debris floods. The 56.7 km watershed exhibits elevations ranging from approximately 1931 masl to 498 masl at the Silver-Skagit Road crossing.

WSP carried out an analysis of nearby hydrometric stations within 30 km of Silver-Skagit Road for unregulated streams to establish a relationship between the catchment area and peak flows based on historical flow measurements. The stations included in the analysis are Chilliwack River above Slesse Creek (08MH103), Coquihalla River above Alexander Creek (08MF068), Coquihalla River below Needle Creek (08MF062), Slesse Creek near Vedder crossing (08MH056), and Tulameen River below Vuich Creek (08NL071). For a contributing catchment of 11.2 km², the resulting 10-yr and 200-yr return period peak flows (Q10 and Q200, respectively) are approximately 10.0 and 26.3 m³/s, not accounting for climate change.

The location of the stations included in this analysis are shown in Figure 1. Although these gauges are for larger drainage areas, they have been selected to best represent potential runoff at this site and are considered adequate for the purposes of this report.

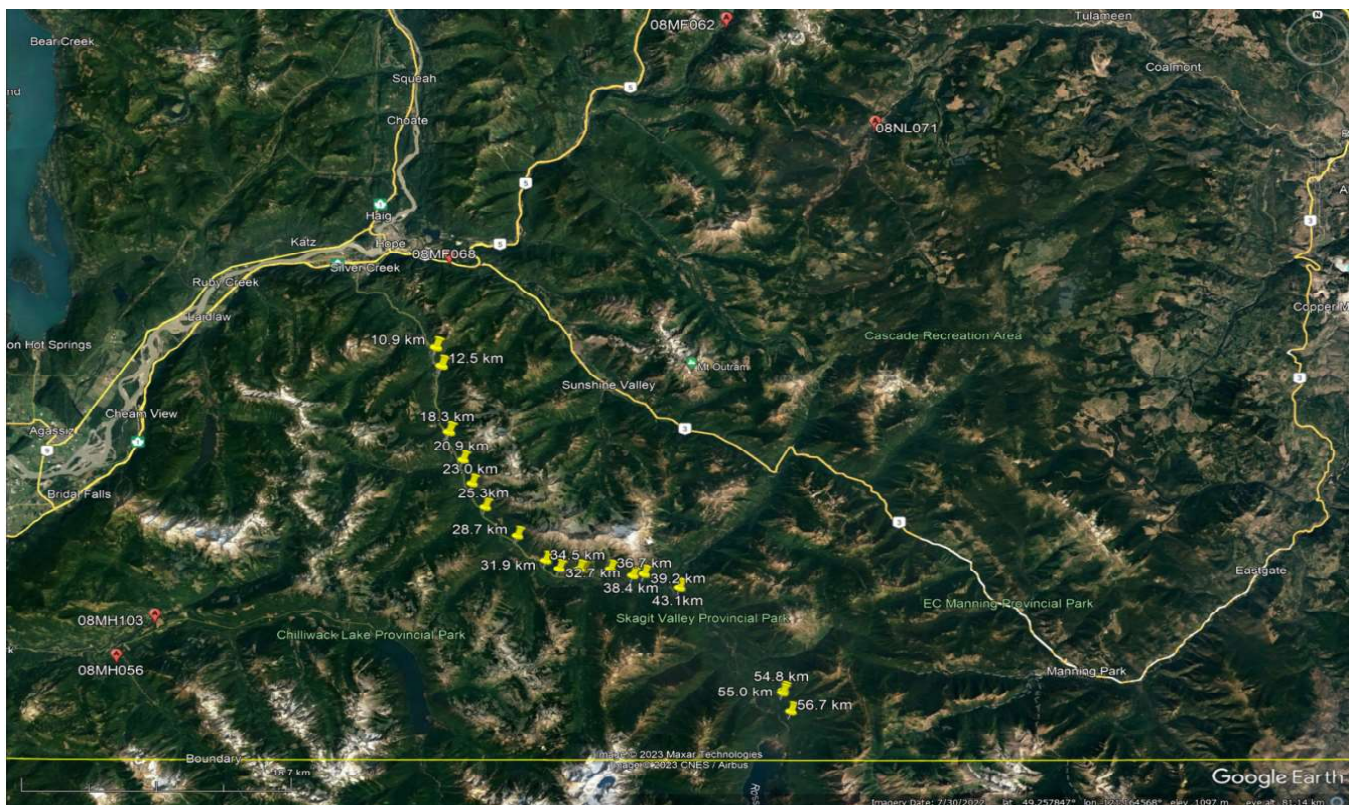


Figure 1 Hydrometric Stations near Hope, BC

2.3 Climate Change Considerations

This section provides of the climate change assessment carried out for the 56.7 km site, which follows the professional practice guidance from EGBC on climate change-resilient highway infrastructure (2020).

The Pacific Climate Impacts Consortium (PCIC) station hydrologic model outputs for historic (1981-2010), mid-century (2040-2069), and end-of-century (2070-2099) periods under RCP 4.5 and RCP 8.5 scenarios were used to estimate projected increases to streamflow for the 200-year return period event at four hydrometric stations: Fraser River at Hope, Coquihalla River above Alexander Creek, Harrison River near Harrison Hot Springs, and Chilliwack River at Vedder Crossing. It was assumed that the increase in streamflow for these larger rivers was applicable to the site catchment. The projected peak flows during a 200-yr return period event were estimated by applying the average median percent increase in streamflow for the RCP 8.5 end-of-century scenario between the four stations (18%) to the 200-yr flow rate under current conditions.

As a check to the projected flow increases based on the PCIC hydrologic model results, the IDF-CC Tool, Version 6.5, created by Western University was used to estimate projected precipitation increases for the area to the end of the century under RCP 8.5. The results indicate that 100-year, 24-hour events could increase in intensity by 19%, which is reasonably close to the results obtained with the PCIC data.

Applying the 18% climate change adjustment to the 10-year and 200-year peak flows results in a Q10 of 11.8 m³/s and a Q200 of 31.0 m³/s.

3.0 HYDRAULIC ANALYSIS

WSP carried out a hydraulic analysis for the 56.7 km site to evaluate the design flow for the proposed culvert and channel replacement during the Q10 and Q200 events. Based on a Melton ratio of 0.52 for the watershed, which corresponds to the potential for debris floods, the water-only peak flow for the location was adjusted by a debris flood bulking factor of 2.0. Once adjusted, the Q200 flows for the culvert and channel at the 56.7 km site is 62.1 m³/s.

The design associated with conveying the full, debris- and climate change-adjusted design flow was found to be unjustifiable by the project team considering the mild degree of damage at this site. As such, a restorative design was selected to fit within the approximate footprint of the existing crossing. Several culvert type options were considered for the replacement; the options included corrugated steel pipe (CSP) and pre-cast concrete box culverts. A pre-cast design was selected to optimize capacity within the existing site footprint and decrease future maintenance requirements.

Detailed site topography was not available during the conceptual design phase.

3.1 Culvert Capacity

The proposed mitigation design includes two (2) 2700 mm (span) x 1200 mm (rise) and one (1) 2100 mm (span) x 1200 mm (rise) pre-cast box-culvert barrels of approximately 19.5 m in length and a slope of 0.5%. Assuming a maximum headwater-to-depth ratio (HW/D) of 0.7, appropriate for systems with potential for floating debris, the capacity of the design is of 10.5 m³/s. This culvert sizing is sufficient to convey the 1:10-year clearwater flood, not accounting for climate change. Culvert outlet velocity for the Q200 design flow has been estimated as 3.8 m/s.

No provisions for fish passage across the culvert have been accounted for, as no fish populations have been identified at the site.

3.2 Channel Design

In addition to the culvert design, WSP evaluated the required drainage channel size to convey the culvert capacity into the proposed culvert. The resulting channel consists of a trapezoidal open channel with 2H:1V side slopes and a minimum base width of 9.5 m.

3.3 Erosion Protection

Erosion protection to the drainage channel has been provided via a riprap layer. Riprap sizing has been estimated following recommendations from Section 1000 of the MoTI Bridge Design Specifications (MoTI, 2019, Section 1000) and the Transportation Association of Canada (TAC) design guidelines, for the Q200 design flow and channel configuration described above. The resulting riprap consists of Class 100 kg riprap and extends along the drainage channel up to 2.4 m upstream from the culvert inlet, and 4.8 m downstream of the culvert outlet. Approximate rock particle mass and sizes for Class 100 kg riprap, based on spherical rock particles with a specific gravity of 2.50, are provided in Table 1.

Table 1 – Class 100 kg Riprap Mass and Gradation

Percent Smaller (by Weight)	Mass (kg)	Intermediate Dimension (mm)
100	500	750
85	300	610
50	100	425
15	10	200

4.0 CLOSURE

We trust that this information is sufficient for your requirements. Should you have any questions regarding the above, or if you require further information, please do not hesitate to contact our office.

WSP CANADA INC.



Emilio Martinez, MSc, PEng
Hydrotechnical Engineer

Engineers & Geoscientist
BC Permit #1000200



May. 12 2023

Kevin Henshaw, PEng
Lead Hydrotechnical Engineer

EM/KHxx

WSP Canada Inc. (WSP) prepared this report solely for the use of the intended recipient, Ministry of Transportation and Infrastructure, in accordance with the professional services agreement. The intended recipient is solely responsible for the disclosure of any information contained in this report. The content and opinions contained in the present report are based on the observations and/or information available to WSP at the time of preparation. If a third party makes use of, relies on, or makes decisions in accordance with this report, said third party is solely responsible for such use, reliance or decisions. WSP does not accept responsibility for damages, if any, suffered by any third party as a result of decisions made or actions taken by said third party based on this report. This limitations statement is considered an integral part of this report.

The original of this digital file will be conserved by WSP for a period of not less than 10 years. As the digital file transmitted to the intended recipient is no longer under the control of Insert company, its integrity cannot be assured. As such, WSP does not guarantee any modifications made to this digital file subsequent to its transmission to the intended recipient.