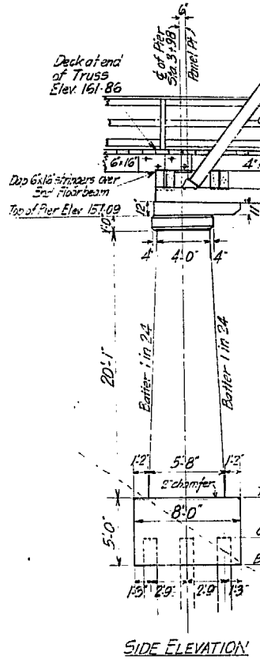

SIDE ELEVATION

PIER Nº 1

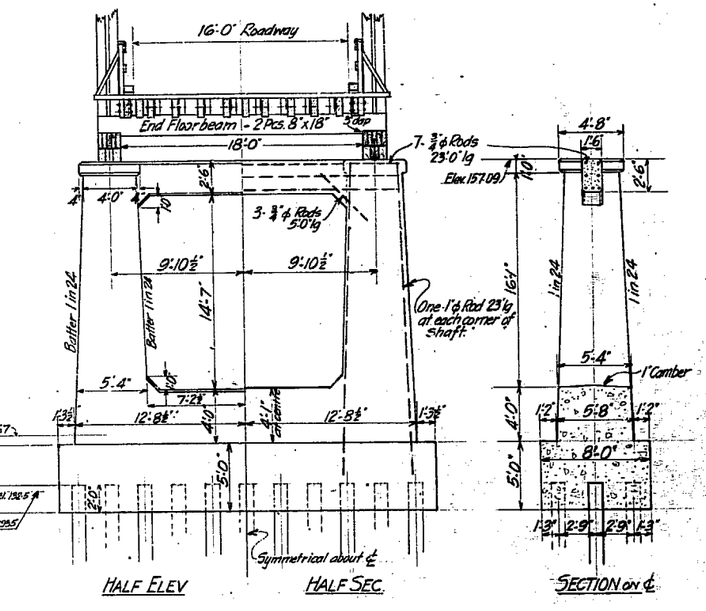

HALF ELEV

HALF SEC.

SECTION on ℄



Detail of Coping

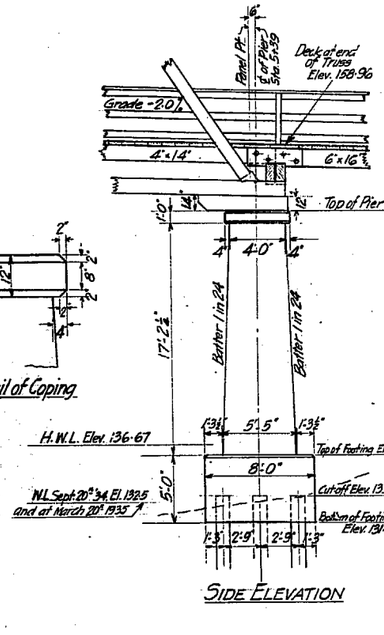

SIDE ELEVATION

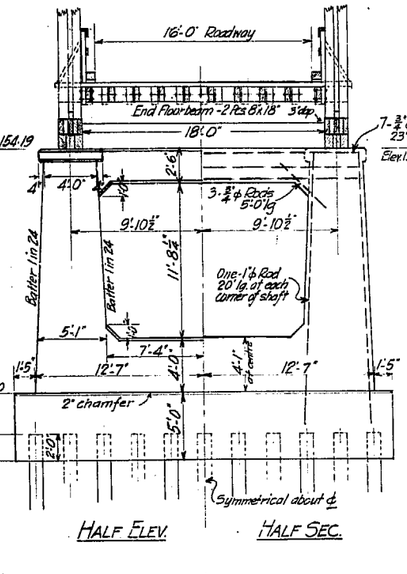

HALF ELEV.

HALF SEC.

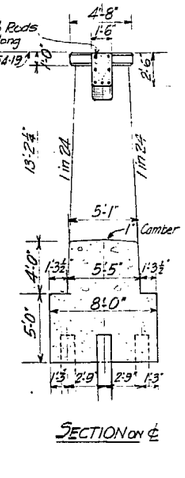

SECTION on ℄

PIER Nº 2

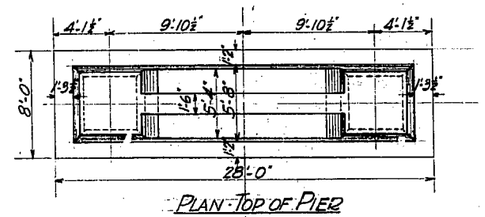

PLAN - TOP OF PIER

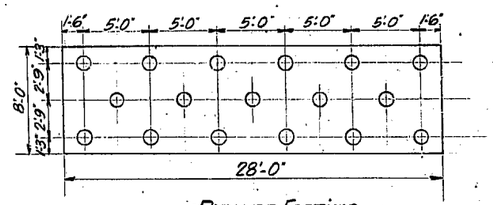

PLAN OF FOOTING

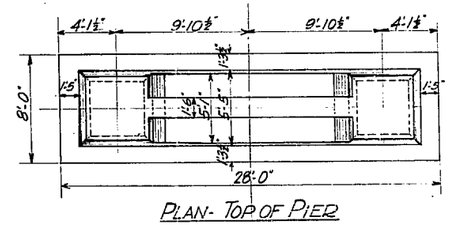

PLAN - TOP OF PIER

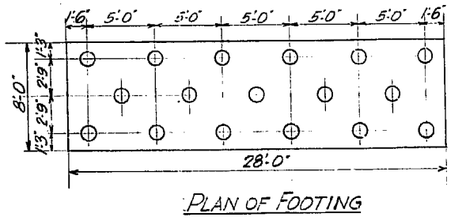

PLAN OF FOOTING

Estimated Conc. Quantities
Pier Nº 1. 92 cu yds.
Pier Nº 2. 85 " "
Total 177 cub yds.
1:2:3 Mix. (Using Sample #1 of Aggregate)

Chamfered edges, where shown on drawing, to be chamfered 2"; all other exposed edges to be chamfered 1".
Place 1"ϕ Reinf. Rods 6" from face of concrete and ¾"ϕ rods 3" from face.

19522

CARIBOO DISTRICT
COTTONWOOD BRIDGE Nº 2
DETAILS OF PIERS
(REVISED)
Scale:- ½" = 1 foot

GOVT. OF BRITISH COLUMBIA
DEPT. OF PUBLIC WORKS
VICTORIA
MADE BY C.K.S. 20th March 1935
TRACED BY
CHECKED BY N.T.H.
APPROVED BY
APPROVED:
CHIEF ENGINEER
DRAWING NO. 245-6