



CERTIFICATE OF ANALYSIS

REPORTED TO Wood E&I Solutions (Prince George)
3456 Opie Crescent
Prince George, BC V2N 2P9

ATTENTION Brian Mcleod

PO NUMBER

PROJECT KX05000A.352

PROJECT INFO Highway 37 N

WORK ORDER 0090235

RECEIVED / TEMP 2020-09-01 10:28 / 19°C

REPORTED 2020-09-10 09:58

COC NUMBER No #

Introduction:

CARO Analytical Services is a testing laboratory full of smart, engaged scientists driven to make the world a safer and healthier place. Through our clients' projects we become an essential element for a better world. We employ methods conducted in accordance with recognized professional standards using accepted testing methodologies and quality control efforts. CARO is accredited by the Canadian Association for Laboratories Accreditation (CALA) to ISO/IEC 17025:2017 for specific tests listed in the scope of accreditation approved by CALA.

Big Picture Sidekicks



You know that the sample you collected after snowshoeing to site, digging 5 meters, and racing to get it on a plane so you can submit it to the lab for time sensitive results needed to make important and expensive decisions (whew) is VERY important. We know that too.

We've Got Chemistry



It's simple. We figure the more you enjoy working with our fun and engaged team members; the more likely you are to give us continued opportunities to support you.

Ahead of the Curve



Through research, regulation knowledge, and instrumentation, we are your analytical centre for the technical knowledge you need, BEFORE you need it, so you can stay up to date and in the know.

Work Order Comments:

Custody Seals Intact: -


If you have any questions or concerns, please contact me at tmaxwell@caro.ca

Authorized By:

Taylor Maxwell
Junior Account Manager

1-888-311-8846 | www.caro.ca

#110 4011 Viking Way Richmond, BC V6V 2K9 | #102 3677 Highway 97N Kelowna, BC V1X 5C3 | 17225 109 Avenue Edmonton, AB T5S 1H7

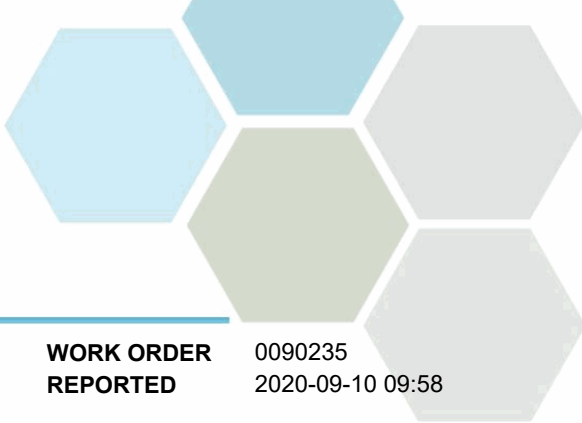


TEST RESULTS

REPORTED TO PROJECT Wood E&I Solutions (Prince George)
KX05000A.352

WORK ORDER REPORTED 0090235
2020-09-10 09:58

Analyte	Result	RL	Units	Analyzed	Qualifier
Alger (0090235-01) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	< 0.002	0.002	%	2020-09-06	
Gnat Sa#1 (0090235-02) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	< 0.002	0.002	%	2020-09-06	
Gnat Sa#2 (0090235-03) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	< 0.002	0.002	%	2020-09-06	
Callison Stoclpile #3 (0090235-04) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	< 0.002	0.002	%	2020-09-06	
Callison Stoclpile #4 (0090235-05) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	0.002	0.002	%	2020-09-06	
Bell II Sa#1 (0090235-06) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	0.002	0.002	%	2020-09-06	
Bell II Sa#2 (0090235-07) Matrix: Soil Sampled: 2020-09-01					
<i>General Parameters</i>					
Sulfate, Water-Soluble	< 0.050	0.050	%	2020-09-06	
Chloride, Water-Soluble	0.002	0.002	%	2020-09-06	

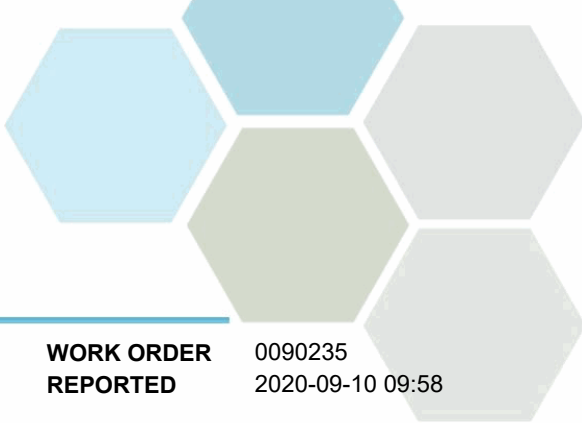

APPENDIX 1: SUPPORTING INFORMATION

REPORTED TO PROJECT Wood E&I Solutions (Prince George)
KX05000A.352

WORK ORDER REPORTED 0090235
2020-09-10 09:58

Analysis Description	Method Ref.	Technique	Accredited	Location
Chloride, Water Soluble in Soil	ASTM C1218-97	Hot Water Extraction / Hot Water Extraction		Richmond
Sulfate, Water-Soluble in Soil	CSA A23.2-3B / CSA A23.2-2B	Extraction (HCl) / Gravimetry (Barium Sulfate Precipitation)		Richmond


Glossary of Terms:

RL	Reporting Limit (default)
%	Percent
<	Less than the specified Reporting Limit (RL) - the actual RL may be higher than the default RL due to various factors
ASTM	ASTM International Test Methods
CSA	Canadian Standards Association Chemical Test Methods

General Comments:

The results in this report apply to the samples analyzed in accordance with the Chain of Custody document. This analytical report must be reproduced in its entirety. CARO is not responsible for any loss or damage resulting directly or indirectly from error or omission in the conduct of testing. Liability is limited to the cost of analysis. Samples will be disposed of 30 days after the test report has been issued unless otherwise agreed to in writing.

Please note any regulatory guidelines applied to this report are added as a convenience to the client, at their request, to help provide some initial context to analytical results obtained. Although CARO makes every effort to ensure accuracy of the associated regulatory guideline(s) applied, the guidelines applied cannot be assumed to be correct due to a variety of factors and as such CARO Analytical Services assumes no liability or responsibility for the use of those guidelines to make any decisions. The original source of the regulation should be verified and a review of the guideline(s) should be validated as correct in order to make any decisions arising from the comparison of the analytical data obtained to the relevant regulatory guideline for one's particular circumstances. Further, CARO Analytical Services assumes no liability or responsibility for any loss attributed from the use of these guidelines in any way.

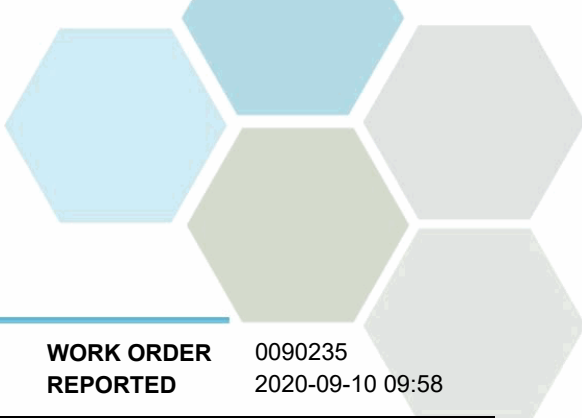

APPENDIX 2: QUALITY CONTROL RESULTS

REPORTED TO PROJECT Wood E&I Solutions (Prince George)
KX05000A.352

WORK ORDER REPORTED 0090235
2020-09-10 09:58

The following section displays the quality control (QC) data that is associated with your sample data. Groups of samples are prepared in “batches” and analyzed in conjunction with QC samples that ensure your data is of the highest quality. Common QC types include:

- **Method Blank (Blk):** A blank sample that undergoes sample processing identical to that carried out for the test samples. Method blank results are used to assess contamination from the laboratory environment and reagents.
- **Duplicate (Dup):** An additional or second portion of a randomly selected sample in the analytical run carried through the entire analytical process. Duplicates provide a measure of the analytical method's precision (reproducibility).
- **Blank Spike (BS):** A sample of known concentration which undergoes processing identical to that carried out for test samples, also referred to as a laboratory control sample (LCS). Blank spikes provide a measure of the analytical method's accuracy.
- **Matrix Spike (MS):** A second aliquot of sample is fortified with with a known concentration of target analytes and carried through the entire analytical process. Matrix spikes evaluate potential matrix effects that may affect the analyte recovery.
- **Reference Material (SRM):** A homogenous material of similar matrix to the samples, certified for the parameter(s) listed. Reference Materials ensure that the analytical process is adequate to achieve acceptable recoveries of the parameter(s) tested.

Each QC type is analyzed at a 5-10% frequency, i.e. one blank/duplicate/spike for every 10-20 samples. For all types of QC, the specified recovery (% Rec) and relative percent difference (RPD) limits are derived from long-term method performance averages and/or prescribed by the reference method.

Analyte	Result	RL Units	Spike Level	Source Result	% REC	REC Limit	% RPD	RPD Limit	Qualifier
---------	--------	----------	-------------	---------------	-------	-----------	-------	-----------	-----------

General Parameters, Batch B0I0518

Blank (B0I0518-BLK1)			Prepared: 2020-09-05, Analyzed: 2020-09-06						
Chloride, Water-Soluble	< 0.002	0.002 %							
Duplicate (B0I0518-DUP1)			Source: 0090235-03 Prepared: 2020-09-05, Analyzed: 2020-09-06						
Chloride, Water-Soluble	0.002	0.002 %		< 0.002					

General Parameters, Batch B0I0560

Blank (B0I0560-BLK1)			Prepared: 2020-09-06, Analyzed: 2020-09-06						
Sulfate, Water-Soluble	< 0.050	0.050 %							