



Client :
Bishop of Victoria

Borehole No. : BH02-1

Location :
840 - 844 View Street, Victoria

(Page 1 of 1)

Drilling Contractor: Drillwell Enterprises Ltd.
Drilling Method : Solid Stem Auger
Borehole Dia. (m) : 0.15
Pipe/Slotted Pipe Dia. (m): 0.05, 0.05


Ground Surf Elev. (m) : 9.837
Top of Casing Elev. (m) : 9.994

Project Number : V2700
Borehole Logged By : RAS
Date Drilled : 2002 07 17
Log Typed By : SAG

Depth in Metres	Drilling Legend ▨ Sample Interval	Water/LPH Levels ▽ Water Level 1 ▽ Water Level 2 ⊕ LPH Level 1 ⊕ LPH Level 2	Stratigraphy Plot	Sample Interval/ Core Run	Sample Number	Blow Count	% Recovery	Soil Vapour (ppm)				Well Name 1 : MW02-1
								1	2	3	4	
0	ASPHALT.											
0	SAND, some gravel, dark brown, loose, moist, (FILL).				1-01			0.25				
1	SILT, some fine grained sand, trace clay, grey to red brown, dense, (NATIVE).				1-02			0.25				
2	CLAY, silty, brown, stiff, moist.				1-03			0.25				
4	CLAY, silty, grey, soft, high plasticity, moist to wet.				1-04			0.25				
5	Below 4.6 m - very soft.											
6	End of borehole at 6.1 m.											

○ Reading within indicated scale
● Reading outside indicated scale

Well Name 1 : MW02-1

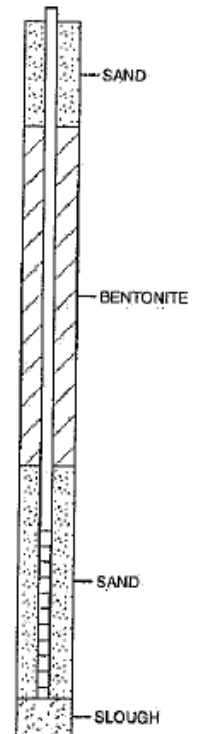

Notes:

Print Date: 2003 03 28, Date Updated: 2003 03 28