

PROVINCE OF BRITISH COLUMBIA
REGULATION OF THE MINISTER OF FORESTS AND RANGE
AND MINISTER RESPONSIBLE FOR HOUSING

Local Government Act

Ministerial Order No. **N 093**

I, Rich Coleman, Minister of Forests and Range and Minister Responsible for Housing, order that the British Columbia Building Code, B.C. Reg. 216/2006, is amended

^{Regulation}
(a) by repealing sentence 9.8.6.2.(3) of Division B and substituting the following:


- 3) A landing may be omitted <at the top of an exterior flight serving> a secondary entrance into a single dwelling unit, <including entrances from attached garages>, provided
- a) the stair does not contain more than three risers,
 - b) <the principal door is a sliding door or swings away from the stair, and
 - c) only a storm or screen door, if any, swings over the stair and is equipped with hardware to hold it open.,

(b) by adding the following sentence 9.25.2.3.(9) to Division B:

- 9) The thermal resistance rating of attic space insulation may be reduced for a distance of 1.0 m from the exterior wall provided the thermal resistance rating is not less than that required for the wall insulation., and

(c) by repealing clause 9.27.2.2.(1)(c) of Division B and substituting the following:

- c) the cladding's components are non-insulating type, hollow-backed aluminum or vinyl and are horizontally oriented and loosely fastened to the backing substrate.

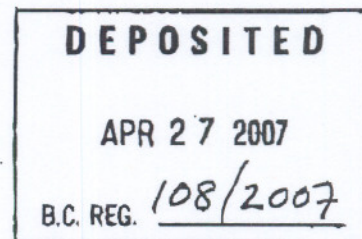

Date April 23/07


Minister of Forests and Range and
Minister Responsible for Housing

(This part is for administrative purposes only and is not part of the Order.)

Authority under which Order is made:

Act and section:- Local Government Act, R.S.B.C. 1996, c. 323, s. 692

Other (specify):- M166/2006

April 18, 2007

R/38/2007/27